



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp®_rate2006 = 112

Sun Fire X4140 (AMD Opteron 2389 2.9GHz)

SPECfp_rate_base2006 = 100

CPU2006 license: 6


Test date: Sep-2009

Test sponsor: Sun Microsystems

Hardware Availability: May-2009

Tested by: Sun Microsystems

Software Availability: Jul-2009

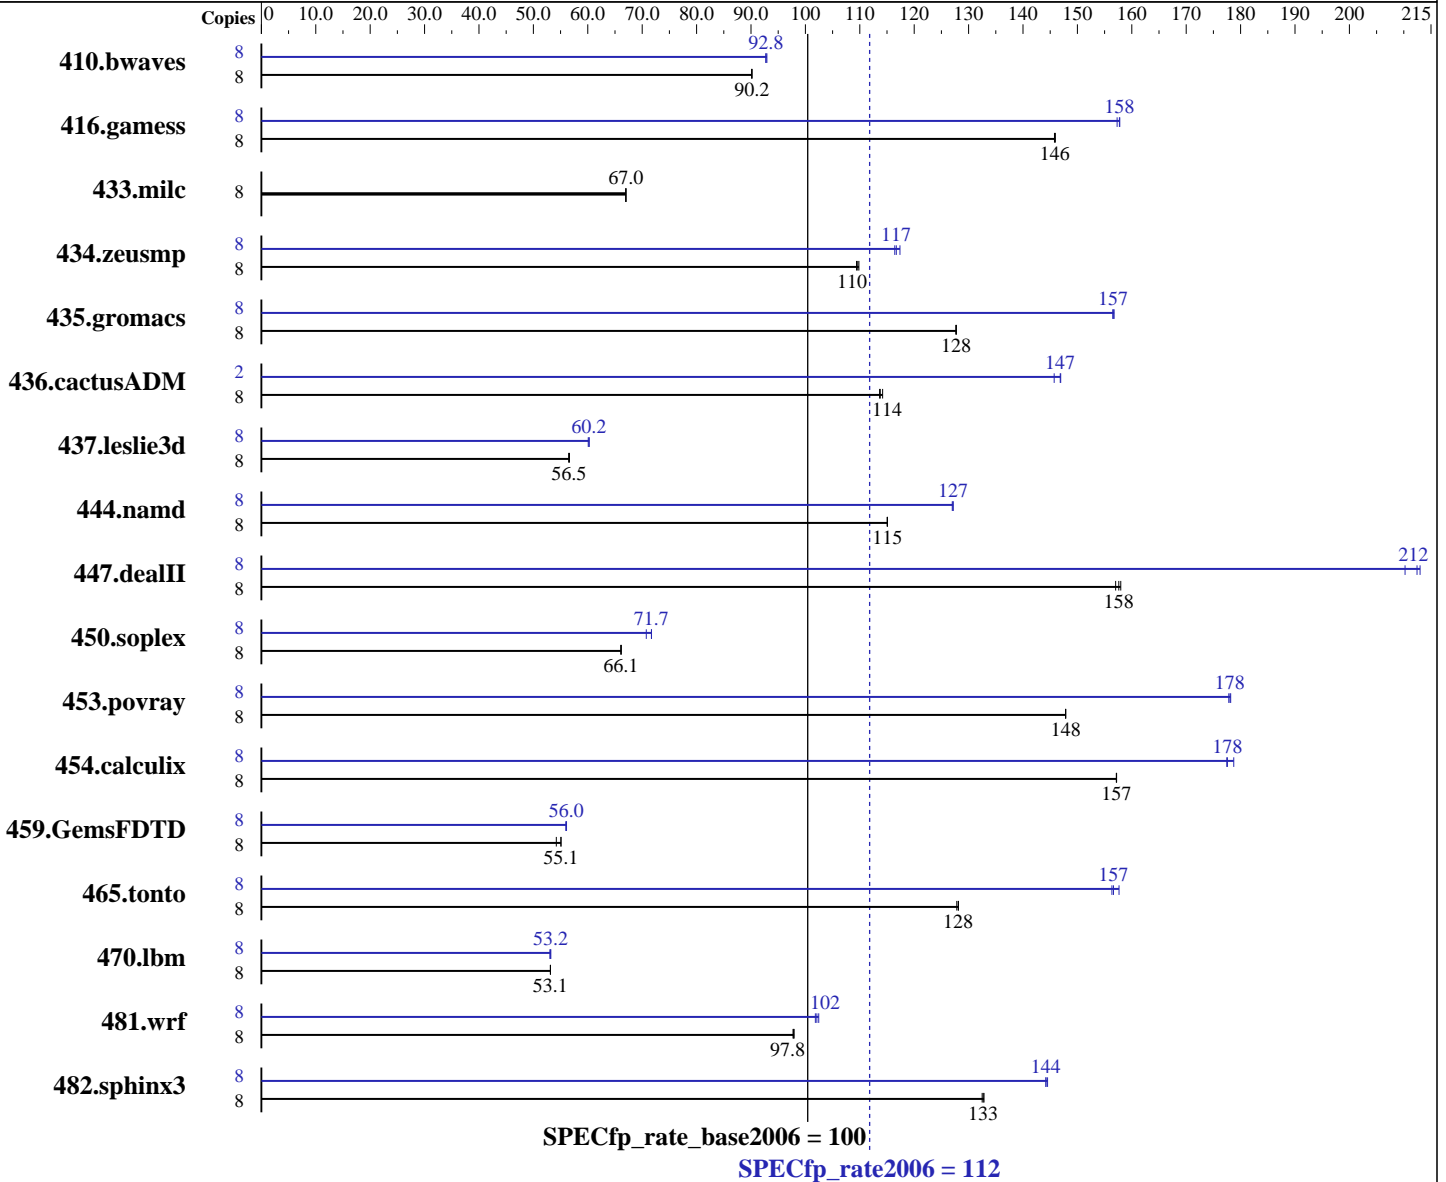

Hardware

CPU Name: AMD Opteron 2389
 CPU Characteristics: 2900
 CPU MHz: 2900
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1 or 2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 5.3, Kernel 2.6.18-128.el5 for x86_64
 Compiler: PGI Server Complete Version 8.0 x86 Open64 4.2.2 Compiler Suite (from AMD)
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp_rate2006 = 112

Sun Fire X4140 (AMD Opteron 2389 2.9GHz)

SPECfp_rate_base2006 = 100

CPU2006 license: 6

Test date: Sep-2009

Test sponsor: Sun Microsystems

Hardware Availability: May-2009

Tested by: Sun Microsystems

Software Availability: Jul-2009

L3 Cache: 6 MB I+D on chip per chip
Other Cache: None
Memory: 32 GB (8x4GB, DDR2-667, CL5, Reg. Dual Rank)
Disk Subsystem: SAS, 72 GB, 10 K RPM
Other Hardware: See additional details below

Other Software: binutils 2.18

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1206	90.2	<u>1206</u>	<u>90.2</u>	1206	90.1	8	<u>1172</u>	<u>92.8</u>	1170	92.9	1173	92.7
416.gamess	8	<u>1074</u>	<u>146</u>	1073	146	1074	146	8	993	158	996	157	<u>993</u>	<u>158</u>
433.milc	8	1096	67.0	<u>1096</u>	<u>67.0</u>	1096	67.0	8	1096	67.0	<u>1096</u>	<u>67.0</u>	1096	67.0
434.zeusmp	8	665	109	<u>664</u>	<u>110</u>	663	110	8	<u>624</u>	<u>117</u>	620	117	625	116
435.gromacs	8	447	128	<u>447</u>	<u>128</u>	447	128	8	364	157	365	157	<u>365</u>	<u>157</u>
436.cactusADM	8	841	114	837	114	<u>840</u>	<u>114</u>	2	163	147	<u>163</u>	<u>147</u>	164	146
437.leslie3d	8	1328	56.6	<u>1330</u>	<u>56.5</u>	1331	56.5	8	1252	60.1	<u>1249</u>	<u>60.2</u>	1248	60.2
444.namd	8	<u>558</u>	<u>115</u>	557	115	558	115	8	<u>505</u>	<u>127</u>	505	127	505	127
447.dealII	8	<u>581</u>	<u>158</u>	579	158	583	157	8	435	210	430	213	<u>431</u>	<u>212</u>
450.soplex	8	1009	66.2	1010	66.1	<u>1009</u>	<u>66.1</u>	8	943	70.8	930	71.7	<u>931</u>	<u>71.7</u>
453.povray	8	288	148	<u>288</u>	<u>148</u>	288	148	8	<u>239</u>	<u>178</u>	239	178	239	178
454.calculix	8	<u>420</u>	<u>157</u>	420	157	420	157	8	<u>372</u>	<u>178</u>	369	179	372	177
459.GemsFDTD	8	<u>1542</u>	<u>55.1</u>	1566	54.2	1541	55.1	8	<u>1514</u>	<u>56.0</u>	1513	56.1	1517	56.0
465.tonto	8	<u>615</u>	<u>128</u>	614	128	616	128	8	499	158	<u>503</u>	<u>157</u>	503	156
470.lbm	8	<u>2069</u>	<u>53.1</u>	2069	53.1	2068	53.1	8	2067	53.2	2073	53.0	<u>2067</u>	<u>53.2</u>
481.wrf	8	913	97.9	914	97.7	<u>913</u>	<u>97.8</u>	8	878	102	<u>875</u>	<u>102</u>	872	102
482.sphinx3	8	1177	132	<u>1175</u>	<u>133</u>	1174	133	8	1079	145	<u>1081</u>	<u>144</u>	1081	144

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit
Set vm/nr_hugepages=7168 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp_rate2006 = 112

Sun Fire X4140 (AMD Opteron 2389 2.9GHz)

SPECfp_rate_base2006 = 100

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Sep-2009

Hardware Availability: May-2009

Software Availability: Jul-2009

Platform Notes

Default BIOS settings used except:
DCT Unganged Mode set to "Always" to enable unganged mode.

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "896"

LD_LIBRARY_PATH = "/data1/SPECcpu2006v1.1-pegasus215/amd0905is-libs/64:/data1/SPECcpu2006v1.1-pegasus215/amd0905is-libs/32"

NCPUS = "4"

PGI_HUGE_PAGES = "896"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
http://developer.amd.com/cpu/open64.

Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp_rate2006 = 112

Sun Fire X4140 (AMD Opteron 2389 2.9GHz)

SPECfp_rate_base2006 = 100

CPU2006 license: 6

Test date: Sep-2009

Test sponsor: Sun Microsystems

Hardware Availability: May-2009

Tested by: Sun Microsystems

Software Availability: Jul-2009

Base Optimization Flags

C benchmarks:

-fastsse -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline
-tp shanghai-64 -Bstatic_pgi

C++ benchmarks:

-fastsse -Msmartalloc=huge -Mfprelaxed --zc_eh -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi

Fortran benchmarks:

-fastsse -Msmartalloc=huge -Mfprelaxed -Mvect=short -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi

Benchmarks using both Fortran and C:

-fastsse -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline
-tp shanghai-64 -Mvect=short -Bstatic_pgi

Base Other Flags

C benchmarks:

-Mipa=jobs:4

C++ benchmarks:

-Mipa=jobs:4

Fortran benchmarks:

-Mipa=jobs:4

Benchmarks using both Fortran and C:

-Mipa=jobs:4

Peak Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks (except as noted below):

openCC

444.namd: pgcpp

Fortran benchmarks (except as noted below):

openf95

410.bwaves: pgf95

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp_rate2006 = 112

Sun Fire X4140 (AMD Opteron 2389 2.9GHz)

SPECfp_rate_base2006 = 100

CPU2006 license: 6

Test date: Sep-2009

Test sponsor: Sun Microsystems

Hardware Availability: May-2009

Tested by: Sun Microsystems

Software Availability: Jul-2009

Peak Compiler Invocation (Continued)

434.zeusmp: pgf95

437.leslie3d: pgf95

Benchmarks using both Fortran and C (except as noted below):

pgcc pgf95

435.gromacs: opencc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64
 436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -Mnomain
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -fastsse -Msmartalloc=huge -Mprefetch=t0 -Mloop32
-Mfprelaxed -Mipa=fast -Mipa=inline -tp shanghai-64
-Bstatic_pgi

482.sphinx3: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mfprelaxed -Msmartalloc -tp shanghai-64 -Bstatic_pgi

C++ benchmarks:

444.namd: -Mphi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -fastsse -Munroll=n:4 -Munroll=m:8
-Msmartalloc=huge -Mnodepchk -Mfprelaxed --zc_eh
-tp shanghai-64 -Bstatic_pgi

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp_rate2006 = 112

Sun Fire X4140 (AMD Opteron 2389 2.9GHz)

SPECfp_rate_base2006 = 100

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Sep-2009

Hardware Availability: May-2009

Software Availability: Jul-2009

Peak Optimization Flags (Continued)

447.deallI: -march=barcelona -Ofast -static -INLINE:aggressive=on
-LNO:opt=0 -Wf,-fno-exceptions -m32 -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m
-GRA:unspill=on -CG:cmp_peep=on -TENV:frame_pointer=off

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -OPT:malloc_alg=1
-CG:load_exe=0 -fno-exceptions -m32 -HP:bdt=2m

453.povray: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on
-HP:bdt=2m:heap=2m

Fortran benchmarks:

410.bwaves: -fastsse -Msmartalloc -Mprefetch=nta -Mfprelaxed
-Mipa=fast -Mipa=inline -tp shanghai-64 -Bstatic_pgi

416.gamess: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O2 -OPT:Ofast -OPT:ro=3
-OPT:unroll_size=256 -HP:bdt=2m:heap=2m

434.zeusmp: -fastsse -Mfprelaxed -Mprefetch=distance:8 -Mprefetch=t0
-Msmartalloc=huge -Msmartalloc=hugebss -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi

437.leslie3d: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mvect=fuse -Msmartalloc=huge -Mprefetch=distance:8
-Mprefetch=t0 -Mfprelaxed -tp shanghai-64 -Bstatic_pgi

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2
-LNO:prefetch_ahead=1 -CG:load_exe=0 -HP

465.tonto: -march=barcelona -Ofast -OPT:alias=no_f90_pointer_alias
-LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -Ofast -OPT:rsqrt=2 -HP:bdt=2m:heap=2m

436.cactusADM: -fastsse -Mconcur -Msmartalloc=huge -Mfprelaxed -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi

454.calculix: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mvect=short -Msmartalloc=huge -Mprefetch=t0 -Mpre

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp_rate2006 = 112

Sun Fire X4140 (AMD Opteron 2389 2.9GHz)

SPECfp_rate_base2006 = 100

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Sep-2009

Hardware Availability: May-2009

Software Availability: Jul-2009

Peak Optimization Flags (Continued)

454.calculix (continued):

-Mfprelaxed -tp shanghai-64 -Bstatic_pgi

481.wrf: -fastsse -Mvect=noaltcode -Msmartalloc=huge

-Mprefetch=distance:8 -Mfprelaxed -tp shanghai-64

-Bstatic_pgi

Peak Other Flags

C benchmarks:

-Mipa=jobs:4(pass 2)

C++ benchmarks:

444.namd: -Mipa=jobs:4(pass 2)

Fortran benchmarks:

410.bwaves: -Mipa=jobs:4

434.zeusmp: -Mipa=jobs:4

437.leslie3d: -Mipa=jobs:4(pass 2)

Benchmarks using both Fortran and C:

436.cactusADM: -Mipa=jobs:4

454.calculix: -Mipa=jobs:4(pass 2)

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd-platform.20090929.html>

http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090915.html

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revE.20090915.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/amd-platform.20090929.xml>

http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090915.xml

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revE.20090915.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp_rate2006 = 112

Sun Fire X4140 (AMD Opteron 2389 2.9GHz)

SPECfp_rate_base2006 = 100

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Sep-2009

Hardware Availability: May-2009

Software Availability: Jul-2009

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 04:45:47 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 October 2009.