



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp[®]_rate2006 = 116

Sun SPARC Enterprise M4000

SPECfp_rate_base2006 = 111

CPU2006 license: 6


Test date: Sep-2009

Test sponsor: Sun Microsystems

Hardware Availability: Nov-2009

Tested by: Sun Microsystems

Software Availability: Oct-2009

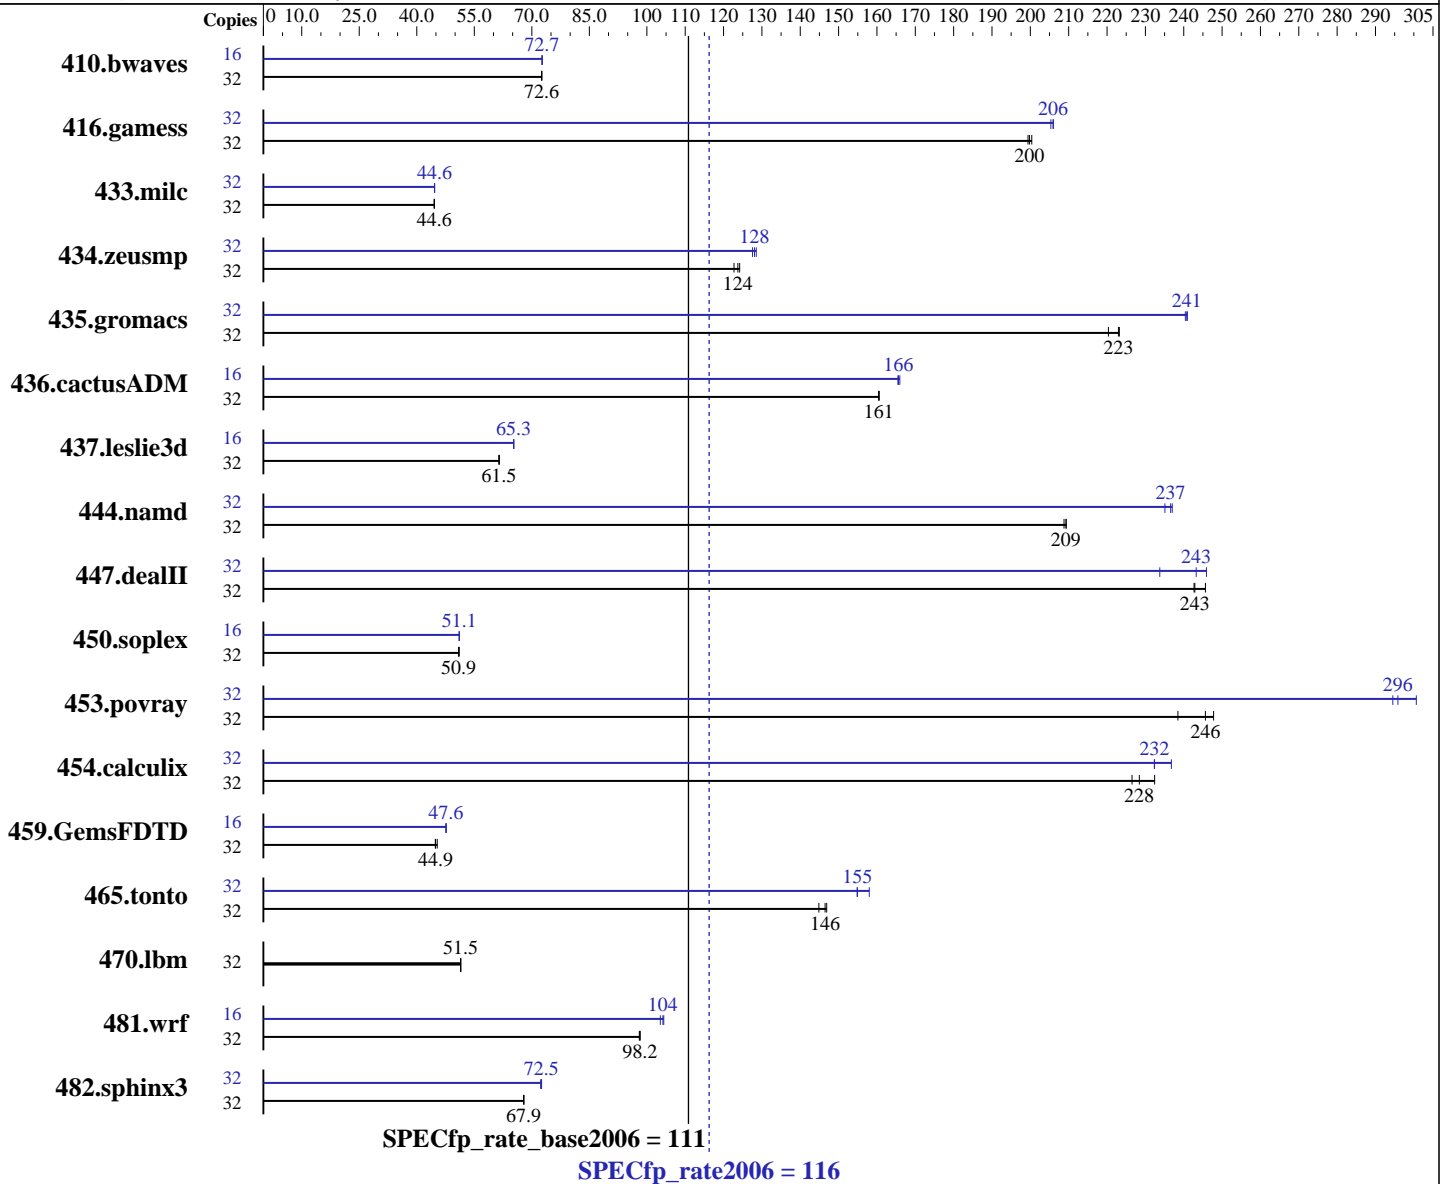

Hardware

CPU Name: SPARC64 VII
 CPU Characteristics:
 CPU MHz: 2530
 FPU: Integrated
 CPU(s) enabled: 16 cores, 4 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 to 2 CPUMs; each CPUM contains 2 CPU chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 5632 KB I+D on chip per chip

Continued on next page

Software

Operating System: Solaris 10 10/09 (s10s_u8wos_06)
 Compiler: Sun Studio 12 Update 1 plus patches (see notes)
 Auto Parallel: No
 File System: zfs
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: None



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp_rate2006 = 116

Sun SPARC Enterprise M4000

SPECfp_rate_base2006 = 111

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: Sep-2009
Hardware Availability: Nov-2009
Software Availability: Oct-2009

L3 Cache: None
Other Cache: None
Memory: 32 GB (32 x 1 GB), 8-way interleaved
Disk Subsystem: 2 x 146 GB SAS 10K RPM
Other Hardware: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	5992	72.6	5990	72.6	<u>5992</u>	<u>72.6</u>	16	2991	72.7	2991	72.7	<u>2991</u>	<u>72.7</u>
416.gamess	32	3127	200	<u>3136</u>	<u>200</u>	3142	199	32	3051	205	3041	206	<u>3043</u>	<u>206</u>
433.milc	32	<u>6592</u>	<u>44.6</u>	6593	44.6	6587	44.6	32	<u>6582</u>	<u>44.6</u>	6577	44.7	6583	44.6
434.zeusmp	32	<u>2353</u>	<u>124</u>	2345	124	2373	123	32	<u>2274</u>	<u>128</u>	2283	128	2266	129
435.gromacs	32	1024	223	<u>1025</u>	<u>223</u>	1037	220	32	948	241	950	240	<u>949</u>	<u>241</u>
436.cactusADM	32	2383	160	<u>2382</u>	<u>161</u>	2382	161	16	1152	166	<u>1154</u>	<u>166</u>	1156	165
437.leslie3d	32	4895	61.5	4892	61.5	<u>4894</u>	<u>61.5</u>	16	2305	65.3	<u>2304</u>	<u>65.3</u>	2303	65.3
444.namd	32	<u>1226</u>	<u>209</u>	1229	209	1226	209	32	1092	235	1083	237	<u>1085</u>	<u>237</u>
447.dealII	32	<u>1507</u>	<u>243</u>	1490	246	1508	243	32	<u>1505</u>	<u>243</u>	1566	234	1489	246
450.soplex	32	5227	51.1	5241	50.9	<u>5239</u>	<u>50.9</u>	16	2613	51.1	<u>2612</u>	<u>51.1</u>	2611	51.1
453.povray	32	<u>693</u>	<u>246</u>	714	238	687	248	32	566	301	578	295	<u>575</u>	<u>296</u>
454.calculix	32	1166	227	<u>1156</u>	<u>228</u>	1136	232	32	<u>1136</u>	<u>232</u>	1115	237	1136	232
459.GemsFDTD	32	7489	45.3	<u>7561</u>	<u>44.9</u>	7573	44.8	16	<u>3563</u>	<u>47.6</u>	3564	47.6	3562	47.7
465.tonto	32	2174	145	2144	147	<u>2150</u>	<u>146</u>	32	2033	155	1993	158	<u>2033</u>	<u>155</u>
470.lbm	32	8545	51.5	<u>8545</u>	<u>51.5</u>	8546	51.5	32	8545	51.5	<u>8545</u>	<u>51.5</u>	8546	51.5
481.wrf	32	3638	98.2	3646	98.0	<u>3641</u>	<u>98.2</u>	16	<u>1716</u>	<u>104</u>	1712	104	1727	104
482.sphinx3	32	<u>9190</u>	<u>67.9</u>	9191	67.9	9178	68.0	32	8597	72.5	<u>8600</u>	<u>72.5</u>	8627	72.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

Sun Studio 12 Update 1 was used, plus patch 119963-17

Sun Studio compiler patches are available at
http://developers.sun.com/sunstudio/downloads/patches/ss12u1_patches.jsp

Submit Notes

Processes were assigned to specific processors using 'pbind' commands. The config file option 'submit' was used, along with a list of processors in the 'BIND' variable, to generate the pbind commands. (For details, please see the config file.)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp_rate2006 = 116

Sun SPARC Enterprise M4000

SPECfp_rate_base2006 = 111

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Sep-2009

Hardware Availability: Nov-2009

Software Availability: Oct-2009

Operating System Notes

ulimit -s 131072 was used to allow the stack to grow up to 131072 KB (aka 128 MB). Note that saying "131072" is preferable to "unlimited", because there is a tradeoff between space for the stack vs. space for the heap.

System Tunables (/etc/system parameters):

tune_t_fsflushr=10

Controls how many seconds elapse between runs of the page flush daemon, fsflush.

autoup=600

Causes pages older than the listed number of seconds to be written by fsflush.

zfs:zfs_arc_max = 0x10000000

Control the amount of memory used by ZFS for caching

Other System Settings:

The webconsole service was turned off using svcadm disable webconsole

The system had 32 GB of swap space

SPEC CPU2006 used 1 disk, with zfs gzip compression.

Platform Notes

Memory is 8-way interleaved by filling all slots with the same capacity DIMMs.

This result is measured on a Sun SPARC Enterprise M4000 Server. The Sun SPARC Enterprise M4000 and the Fujitsu SPARC Enterprise M4000 are electrically equivalent.

General Notes

Environment variables set by runspec before the start of the run:

OMP_NUM_THREADS = "32"

SUNW_MP_PROCBIND = "true"

SUNW_MP_THR_IDLE = "SPIN"

(Although these variables were set prior to the run they did not affect performance, since the benchmarks were compiled in serial mode.)

447.dealII (peak): "apache_stdctx_4_2_1" src.alt was used.

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp_rate2006 = 116

Sun SPARC Enterprise M4000

SPECfp_rate_base2006 = 111

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Sep-2009

Hardware Availability: Nov-2009

Software Availability: Oct-2009

General Notes (Continued)

447.dealIII (base): "apache_stdccx_4_2_1" src.alt was used.

Base Compiler Invocation

C benchmarks:

cc

C++ benchmarks:

CC

Fortran benchmarks:

f90

Benchmarks using both Fortran and C:

cc f90

Base Optimization Flags

C benchmarks:

-fast -fma=fused -xipo=2 -xpagesize=4M -xalias_level=std
-xprefetch_auto_type=indirect_array_access -xprefetch_level=3

C++ benchmarks:

-xdepend -fast -fma=fused -xipo=2 -xpagesize=4M
-xalias_level=compatible -xprefetch=latx:0.5 -library=no%Cstd
-I/export/home/apache/stdccx-4.2.1/include
-I/export/home/apache/stdccx-4.2.1/build/include
-L/export/home/apache/stdccx-4.2.1/build/lib
-R/export/home/apache/stdccx-4.2.1/build/lib -lstd8d

Fortran benchmarks:

-fast -fma=fused -xipo=2 -xpagesize=4M -xprefetch_level=2

Benchmarks using both Fortran and C:

-fast(cc) -fast(f90) -fma=fused -xipo=2 -xpagesize=4M
-xalias_level=std -xprefetch_auto_type=indirect_array_access
-xprefetch_level=3 -xprefetch_level=2

Base Other Flags

C benchmarks:

-xjobs=32 -V -#

C++ benchmarks:

-xjobs=32 -verbose=diags,version

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp_rate2006 = 116

Sun SPARC Enterprise M4000

SPECfp_rate_base2006 = 111

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Sep-2009

Hardware Availability: Nov-2009

Software Availability: Oct-2009

Base Other Flags (Continued)

Fortran benchmarks:

-xjobs=32 -V -v

Benchmarks using both Fortran and C:

-xjobs=32 -V -# -v

Peak Compiler Invocation

C benchmarks:

cc

C++ benchmarks:

CC

Fortran benchmarks:

f90

Benchmarks using both Fortran and C:

cc f90

Peak Optimization Flags

C benchmarks:

433.milc: -fast -xpagesize=4M -fma=fused -xipo=2 -xprefetch_level=2
-fsimple=1 -xprefetch_auto_type=indirect_array_access
-W2,-Ainline:rs=400 -xalias_level=std

470.lbm: basepeak = yes

482.sphinx3: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-fma=fused -xipo=2 -xinline= -xprefetch=no%auto
-xalias_level=strong -lfast -ll2amm

C++ benchmarks:

444.namd: -xdepend -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xalias_level=compatible -library=stlport4 -fma=fused
-xipo=2 -xprefetch=no%auto -xlinkopt=2

447.dealII: -xdepend -fast -xpagesize=4M -xalias_level=compatible
-library=no%Cstd -I/export/home/apache/stdcxx-4.2.1/include
-I/export/home/apache/stdcxx-4.2.1/build/include -fma=fused
-xipo=2 -xprefetch=latx:0.5
-L/export/home/apache/stdcxx-4.2.1/build/lib

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp_rate2006 = 116

Sun SPARC Enterprise M4000

SPECfp_rate_base2006 = 111

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Sep-2009

Hardware Availability: Nov-2009

Software Availability: Oct-2009

Peak Optimization Flags (Continued)

447.dealIII (continued):

-R/export/home/apache/stdcxx-4.2.1/build/lib -lstd8d

450.soplex: -xdepend -xprofile=collect:./feedback(pass 1)

-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M

-xalias_level=compatible -library=stlport4 -xipo=1

-xprefetch=no -fsimple=0 -xrestrict

453.povray: -xdepend -xprofile=collect:./feedback(pass 1)

-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M

-xalias_level=compatible -library=stlport4 -xipo=2

-xlinkopt=2

Fortran benchmarks:

410.bwaves: -fast -xpagesize=4M -fma=fused -xipo=2 -xprefetch_level=2

416.gamess: -xprofile=collect:./feedback(pass 1)

-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M

-fma=fused -xipo=2 -xprefetch=no%auto

434.zeusmp: -fast -xpagesize=4M -fma=fused -xipo=2 -xprefetch_level=1

-ll2amm

437.leslie3d: -fast -xpagesize=4M -xprefetch=no

459.GemsFDTD: -fast -xpagesize=4M -fma=fused -fsimple=1 -xprefetch=no

465.tonto: -xprofile=collect:./feedback(pass 1)

-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M

-xipo=2 -xprefetch=no -lfast -ll2amm

Benchmarks using both Fortran and C:

435.gromacs: -xprofile=collect:./feedback(pass 1)

-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)

-xpagesize=4M -fma=fused -xipo=2 -xchip=generic -xinline=

-fsimple=0

436.cactusADM: -fast(cc) -fast(f90) -xpagesize=4M -fma=fused -xipo=2

-xprefetch=latx:0.7 -fsimple=1

454.calculix: -fast(cc) -fast(f90) -xpagesize=4M -fma=fused -xipo=2

-xprefetch_level=1 -xalias_level=std

-xprefetch_auto_type=indirect_array_access

481.wrf: -xprofile=collect:./feedback(pass 1)

-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)

-xpagesize=4M -xipo=2 -xprefetch_level=2



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp_rate2006 = 116

Sun SPARC Enterprise M4000

SPECfp_rate_base2006 = 111

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Sep-2009

Hardware Availability: Nov-2009

Software Availability: Oct-2009

Peak Other Flags

C benchmarks:

-xjobs=32 -V -#

C++ benchmarks:

-xjobs=32 -verbose=diags,version

Fortran benchmarks:

-xjobs=32 -V -v

Benchmarks using both Fortran and C:

-xjobs=32 -V -# -v

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-12u1-and-gccfss4.2.r4.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-12u1-and-gccfss4.2.r4.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 04:12:12 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 28 October 2009.