



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp[®]_rate2006 = 2100

Sun SPARC Enterprise M9000

SPECfp_rate_base2006 = 1930

CPU2006 license: 6


Test date: Aug-2009

Test sponsor: Sun Microsystems

Hardware Availability: Nov-2009

Tested by: Fujitsu Limited

Software Availability: Jun-2009

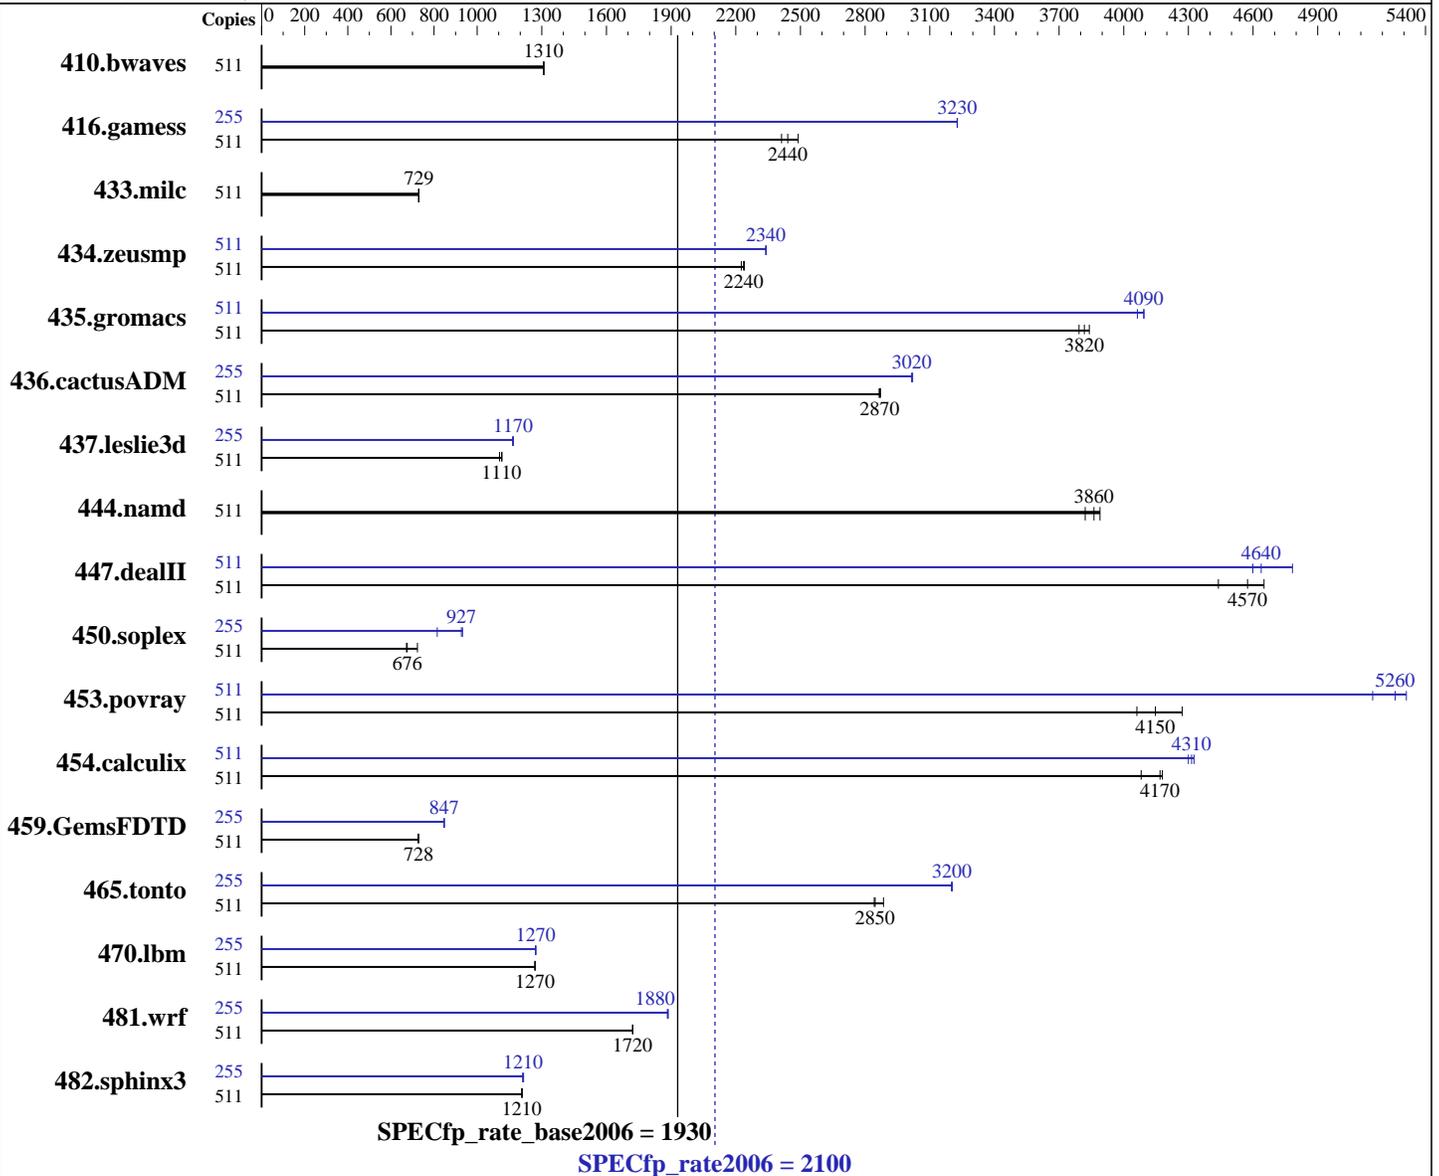

Hardware

CPU Name: SPARC64 VII
 CPU Characteristics:
 CPU MHz: 2880
 FPU: Integrated
 CPU(s) enabled: 256 cores, 64 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 to 16 CMUs; each CMU contains 2 or 4 CPU chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 6 MB I+D on chip per chip

Continued on next page

Software

Operating System: Solaris 10 5/09 with patches 119963-13, 120753-06, 118683-03
 Compiler: Sun Studio 12 Update 1
 Auto Parallel: No
 File System: ufs
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp_rate2006 = 2100

Sun SPARC Enterprise M9000

SPECfp_rate_base2006 = 1930

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Fujitsu Limited

Test date: Aug-2009

Hardware Availability: Nov-2009

Software Availability: Jun-2009

L3 Cache: None
 Other Cache: None
 Memory: 1152 GB (448 x 2 GB + 64 x 4 GB), 8-way interleaved
 Disk Subsystem: 1 x Seagate Savvio 10K.2 (146 GB 10,000 RPM SAS)
 3400 GB RAID 0 Solaris Volume
 24 x Seagate Savvio 10K.2 (146 GB 10,000 RPM SAS)
 Stripe interlace 2048 Kbytes
 Other Hardware: None

Other Software: Apache C++ Standard Library V4.2.1

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---------------|--------|-------------|-------------|-------------|-------------|-------------|-------------|--------|-------------|-------------|-------------|-------------|-------------|-------------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 410.bwaves | 511 | 5303 | 1310 | 5305 | 1310 | 5306 | 1310 | 511 | 5303 | 1310 | 5305 | 1310 | 5306 | 1310 |
| 416.gamess | 511 | 4019 | 2490 | 4147 | 2410 | 4099 | 2440 | 255 | 1547 | 3230 | 1547 | 3230 | 1547 | 3230 |
| 433.milc | 511 | 6428 | 730 | 6431 | 729 | 6441 | 728 | 511 | 6428 | 730 | 6431 | 729 | 6441 | 728 |
| 434.zeusmp | 511 | 2079 | 2240 | 2076 | 2240 | 2089 | 2230 | 511 | 1988 | 2340 | 1987 | 2340 | 1986 | 2340 |
| 435.gromacs | 511 | 956 | 3820 | 950 | 3840 | 962 | 3790 | 511 | 898 | 4060 | 891 | 4090 | 892 | 4090 |
| 436.cactusADM | 511 | 2127 | 2870 | 2130 | 2870 | 2131 | 2870 | 255 | 1009 | 3020 | 1010 | 3020 | 1010 | 3020 |
| 437.leslie3d | 511 | 4352 | 1100 | 4307 | 1120 | 4313 | 1110 | 255 | 2053 | 1170 | 2058 | 1160 | 2053 | 1170 |
| 444.namd | 511 | 1061 | 3860 | 1073 | 3820 | 1054 | 3890 | 511 | 1061 | 3860 | 1073 | 3820 | 1054 | 3890 |
| 447.dealII | 511 | 1278 | 4570 | 1317 | 4440 | 1257 | 4650 | 511 | 1222 | 4780 | 1261 | 4640 | 1271 | 4600 |
| 450.soplex | 511 | 5895 | 723 | 6340 | 672 | 6308 | 676 | 255 | 2610 | 815 | 2295 | 927 | 2281 | 932 |
| 453.povray | 511 | 636 | 4270 | 669 | 4060 | 656 | 4150 | 511 | 512 | 5310 | 517 | 5260 | 527 | 5160 |
| 454.calculix | 511 | 1011 | 4170 | 1033 | 4080 | 1009 | 4180 | 511 | 980 | 4300 | 975 | 4330 | 977 | 4310 |
| 459.GemsFDTD | 511 | 7466 | 726 | 7445 | 728 | 7444 | 728 | 255 | 3193 | 847 | 3195 | 847 | 3194 | 847 |
| 465.tonto | 511 | 1743 | 2890 | 1766 | 2850 | 1769 | 2840 | 255 | 784 | 3200 | 783 | 3200 | 783 | 3200 |
| 470.lbm | 511 | 5533 | 1270 | 5534 | 1270 | 5537 | 1270 | 255 | 2754 | 1270 | 2755 | 1270 | 2756 | 1270 |
| 481.wrf | 511 | 3315 | 1720 | 3317 | 1720 | 3314 | 1720 | 255 | 1513 | 1880 | 1510 | 1890 | 1512 | 1880 |
| 482.sphinx3 | 511 | 8246 | 1210 | 8239 | 1210 | 8249 | 1210 | 255 | 4098 | 1210 | 4102 | 1210 | 4089 | 1220 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

Sun Studio compiler patches are available at
http://developers.sun.com/sunstudio/downloads/patches/ss12u1_patches.jsp

The Apache C++ Standard Library V4.2.1 was installed from
<http://stdcxx.apache.org/download.html> using:
alias gmake=specmake
gmake BUILDTYPE=8d CONFIG=sunpro.config



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp_rate2006 = 2100

Sun SPARC Enterprise M9000

SPECfp_rate_base2006 = 1930

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Fujitsu Limited

Test date: Aug-2009

Hardware Availability: Nov-2009

Software Availability: Jun-2009

Submit Notes

The config file option 'submit' was used. Processes were assigned to specific processors using 'pbind' commands. The list of processors to use was provided in the 'BIND' variable, to generate the pbind commands. (For details, please see the config file.)

Operating System Notes

Shell Environments:

```
ulimit -s 131072 was used to limit the space consumed
by the stack.(making more space available for the heap)
```

System Tunables:

(/etc/system parameters)

```
autoup=300
```

```
Causes pages older than the listed number of seconds to
be written by fsflush.
```

```
bufhwm=40000000
```

```
Memory byte limit for caching I/O buffers.
```

```
lpg_alloc_prefer=1
```

```
Set lgroup page allocation to strongly prefer local pages.
```

Other System Settings:

```
The webconsole service was turned off using svcadm disable webconsole.
```

The SPEC toolset was bound to processors 1-511 using processor sets:

```
psrset -c 1-511
```

```
psrset -e 1 ksh
```

Platform Notes

Memory is 8-way interleaved by filling each CMU's slots with the same capacity DIMMs.

This result is measured on a Fujitsu SPARC Enterprise M9000 Server. Note that the Fujitsu SPARC Enterprise M9000 and Sun SPARC Enterprise M9000 are electrically equivalent.

General Notes

447.dealII (peak): "apache_stdccxx_4_2_1" src.alt was used.

447.dealII (base): "apache_stdccxx_4_2_1" src.alt was used.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp_rate2006 = 2100

Sun SPARC Enterprise M9000

SPECfp_rate_base2006 = 1930

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Fujitsu Limited

Test date: Aug-2009

Hardware Availability: Nov-2009

Software Availability: Jun-2009

Base Compiler Invocation

C benchmarks:

cc

C++ benchmarks:

CC

Fortran benchmarks:

f90

Benchmarks using both Fortran and C:

cc f90

Base Optimization Flags

C benchmarks:

-fast -xipo=2 -xpagesize=4M -fma=fused -xalias_level=std
-xprefetch_auto_type=indirect_array_access -xprefetch_level=1 -l12amm

C++ benchmarks:

-xdepend -fast -xipo=2 -xpagesize=4M -fma=fused
-xalias_level=compatible -xprefetch_level=1 -library=no%Cstd
-I/export/cpu2006/stdcxx-4.2.1/include
-I/export/cpu2006/stdcxx-4.2.1/build/include -l12amm
-L/export/cpu2006/stdcxx-4.2.1/build/lib
-R/export/cpu2006/stdcxx-4.2.1/build/lib -lstd8d

Fortran benchmarks:

-fast -xipo=2 -xpagesize=4M -fma=fused -xprefetch_level=2 -l12amm

Benchmarks using both Fortran and C:

-fast(cc) -fast(f90) -xipo=2 -xpagesize=4M -fma=fused
-xalias_level=std -xprefetch_auto_type=indirect_array_access
-xprefetch_level=1 -xprefetch_level=2 -l12amm

Base Other Flags

C benchmarks:

-xjobs=16 -V -#

C++ benchmarks:

-xjobs=16 -verbose=diags,version

Fortran benchmarks:

-xjobs=16 -V -v

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp_rate2006 = 2100

Sun SPARC Enterprise M9000

SPECfp_rate_base2006 = 1930

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Fujitsu Limited

Test date: Aug-2009

Hardware Availability: Nov-2009

Software Availability: Jun-2009

Base Other Flags (Continued)

Benchmarks using both Fortran and C:
-xjobs=16 -V -# -v

Peak Compiler Invocation

C benchmarks:
cc

C++ benchmarks:
CC

Fortran benchmarks:
f90

Benchmarks using both Fortran and C:
cc f90

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xrestrict -xipo=2
-xprefetch_level=2 -xarch=v8plusb -l12amm

482.sphinx3: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xpagesize=4M -fma=fused -xinline= -xalias_level=strong
-xprefetch_level=2 -lfast -l12amm

C++ benchmarks:

444.namd: basepeak = yes

447.dealIII: -xdepend -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xpagesize=4M -fma=fused -xalias_level=compatible
-library=no%Cstd -I/export/cpu2006/stdcxx-4.2.1/include
-I/export/cpu2006/stdcxx-4.2.1/build/include -xrestrict
-xprefetch=no -l12amm
-L/export/cpu2006/stdcxx-4.2.1/build/lib
-R/export/cpu2006/stdcxx-4.2.1/build/lib -lstd8d

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp_rate2006 = 2100

Sun SPARC Enterprise M9000

SPECfp_rate_base2006 = 1930

CPU2006 license: 6

Test date: Aug-2009

Test sponsor: Sun Microsystems

Hardware Availability: Nov-2009

Tested by: Fujitsu Limited

Software Availability: Jun-2009

Peak Optimization Flags (Continued)

450.soplex: -xdepend -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xpagesize=4M -fma=fused -xalias_level=compatible
-library=stlport4 -fsimple=0 -xrestrict -xprefetch=no
-ll2amm

453.povray: -xdepend -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xpagesize=4M -fma=fused -xalias_level=compatible
-library=stlport4 -xprefetch=latx:5.0 -ll2amm

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xpagesize=4M -fma=fused -xprefetch_level=1 -ll2amm

434.zeusmp: -fast -xipo=2 -xpagesize=4M -fma=fused -xprefetch_level=1
-lmopt -ll2amm

437.leslie3d: -fast -xipo=2 -xpagesize=4M -fma=fused -xprefetch=latx:5.0
-ll2amm

459.GemsFDTD: -fast -xipo=2 -xpagesize=4M -fma=fused -fsimple=1
-xprefetch=no -ll2amm

465.tonto: -fast -xipo=2 -xpagesize=4M -fma=fused -xprefetch=no
-lfast -ll2amm

Benchmarks using both Fortran and C:

435.gromacs: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
-xipo=2 -xpagesize=4M -fma=fused -fsimple=0
-xprefetch_level=1 -xprefetch=latx:0.5

436.cactusADM: -fast(cc) -fast(f90) -xipo=2 -xpagesize=4M -fma=fused
-ll2amm

454.calculix: -fast(cc) -fast(f90) -xipo=2 -xpagesize=4M -fma=fused
-xprefetch=latx:3.0 -ll2amm

481.wrf: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
-xipo=2 -xpagesize=4M -fma=fused -xprefetch=no -ll2amm



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp_rate2006 = 2100

Sun SPARC Enterprise M9000

SPECfp_rate_base2006 = 1930

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Fujitsu Limited

Test date: Aug-2009

Hardware Availability: Nov-2009

Software Availability: Jun-2009

Peak Other Flags

C benchmarks:

-xjobs=16 -V -#

C++ benchmarks:

-xjobs=16 -verbose=diags,version

Fortran benchmarks:

-xjobs=16 -V -v

Benchmarks using both Fortran and C:

-xjobs=16 -V -# -v

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-12u1-and-gccfss4.2.r4.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-12u1-and-gccfss4.2.r4.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 04:25:37 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 28 October 2009.