



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

### SPECfp®\_rate2006 = 276

### Motherboard H8QI6-F, AMD Opteron 8435

### SPECfp\_rate\_base2006 = 251

CPU2006 license: 001176


Test date: Nov-2009

Test sponsor: Supermicro

Hardware Availability: Jun-2009

Tested by: Supermicro

Software Availability: Apr-2009

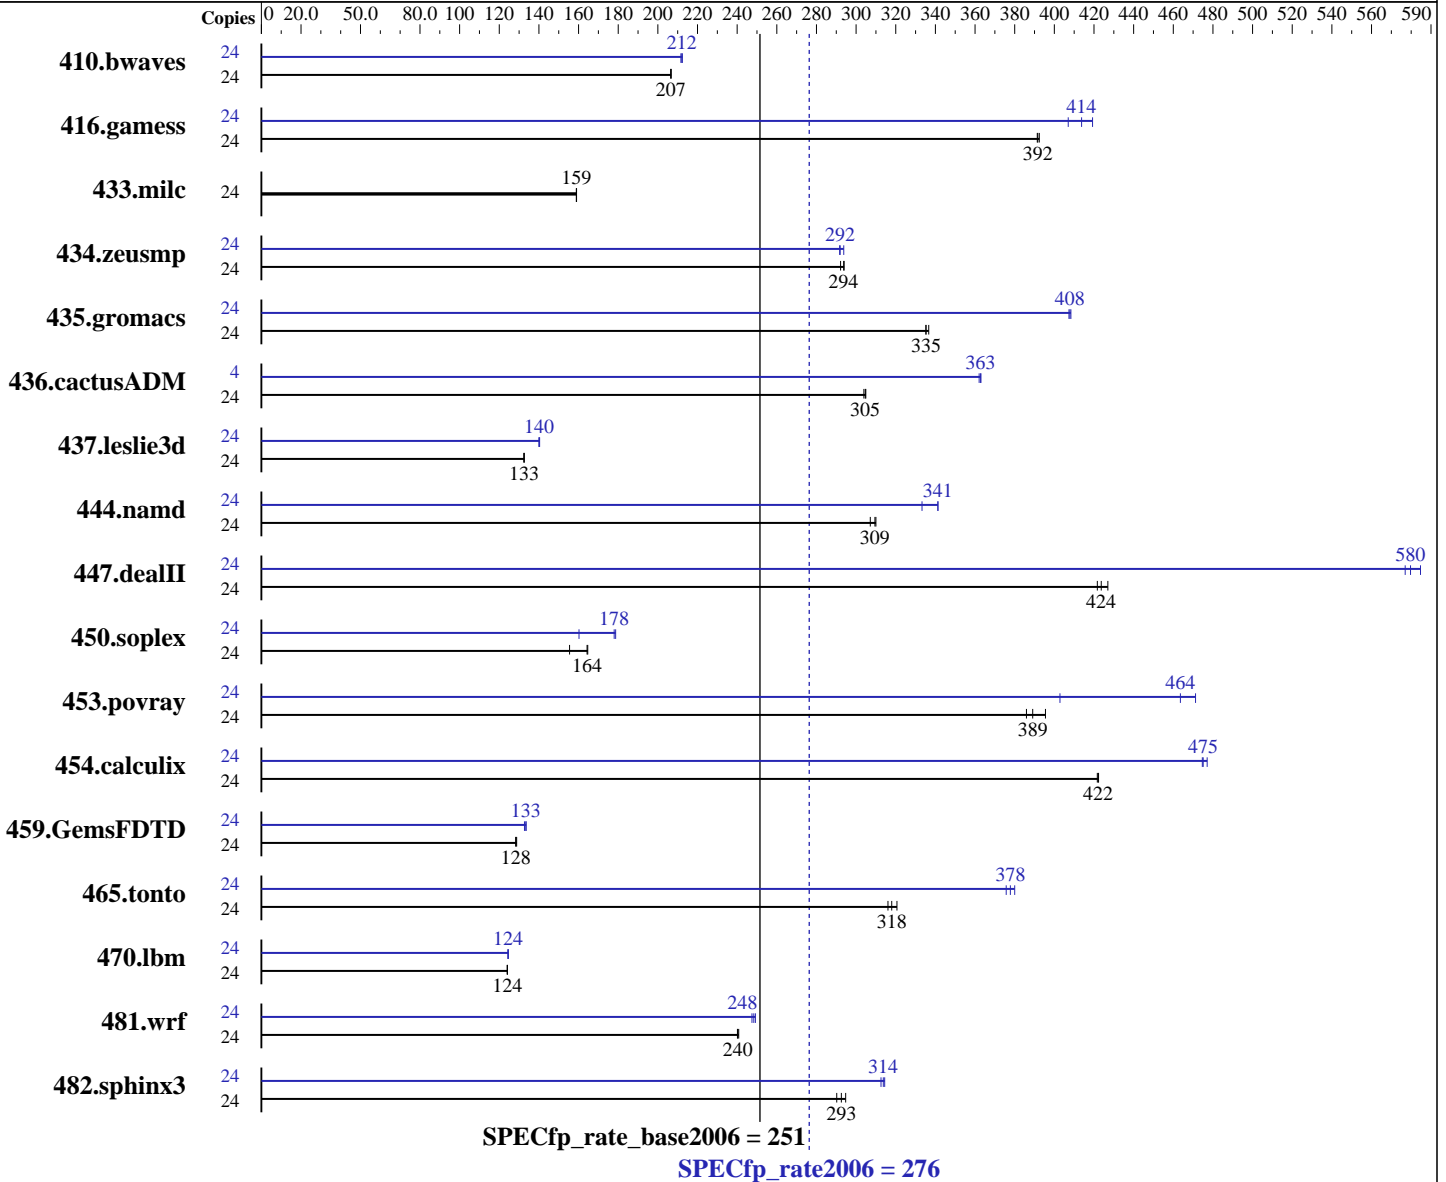

#### Hardware

CPU Name: AMD Opteron 8435  
 CPU Characteristics:  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 24 cores, 4 chips, 6 cores/chip  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

#### Software

Operating System: Red Hat Enterprise Linux Server release 5.4, Advanced Platform, Kernel 2.6.18-164.el5  
 Compiler: PGI Server Complete Version 8.0 x86 Open64 4.2.2 Compiler Suite (from AMD)  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 2 (Local multiuser without remote network)  
 Base Pointers: 64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SPECfp\_rate2006 = 276

Motherboard H8QI6-F, AMD Opteron 8435

SPECfp\_rate\_base2006 = 251

CPU2006 license: 001176

Test date: Nov-2009

Test sponsor: Supermicro

Hardware Availability: Jun-2009

Tested by: Supermicro

Software Availability: Apr-2009

L3 Cache: 6 MB I+D on chip per chip  
Other Cache: None  
Memory: 64 GB (16x4 GB, DDR2-800, CL5, Reg, Dual Rank)  
Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
Other Hardware: None

Peak Pointers: 32/64-bit  
Other Software: binutils 2.18

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	<b>1579</b>	<b>207</b>	1578	207	1579	207	24	<b>1538</b>	<b>212</b>	1536	212	1541	212
416.gamess	24	1201	391	1198	392	<b>1200</b>	<b>392</b>	24	1155	407	<b>1136</b>	<b>414</b>	1121	419
433.milc	24	1387	159	<b>1386</b>	<b>159</b>	1386	159	24	1387	159	<b>1386</b>	<b>159</b>	1386	159
434.zeusmp	24	748	292	<b>744</b>	<b>294</b>	743	294	24	<b>748</b>	<b>292</b>	749	292	743	294
435.gromacs	24	511	335	<b>511</b>	<b>335</b>	509	337	24	421	407	<b>420</b>	<b>408</b>	420	408
436.cactusADM	24	944	304	941	305	<b>941</b>	<b>305</b>	4	132	363	<b>132</b>	<b>363</b>	132	362
437.leslie3d	24	1702	133	1703	132	<b>1703</b>	<b>133</b>	24	1607	140	1611	140	<b>1610</b>	<b>140</b>
444.namd	24	627	307	621	310	<b>622</b>	<b>309</b>	24	578	333	<b>564</b>	<b>341</b>	564	341
447.dealII	24	643	427	<b>648</b>	<b>424</b>	651	422	24	<b>474</b>	<b>580</b>	470	585	476	577
450.soplex	24	1288	155	1216	165	<b>1218</b>	<b>164</b>	24	1249	160	<b>1125</b>	<b>178</b>	1120	179
453.povray	24	323	396	<b>328</b>	<b>389</b>	331	386	24	271	471	<b>275</b>	<b>464</b>	317	403
454.calculix	24	<b>469</b>	<b>422</b>	469	422	470	422	24	<b>417</b>	<b>475</b>	417	475	415	477
459.GemsFDTD	24	<b>1983</b>	<b>128</b>	1977	129	1985	128	24	<b>1909</b>	<b>133</b>	1919	133	1907	134
465.tonto	24	<b>743</b>	<b>318</b>	737	321	747	316	24	621	380	629	376	<b>625</b>	<b>378</b>
470.lbm	24	<b>2658</b>	<b>124</b>	2657	124	2658	124	24	<b>2650</b>	<b>124</b>	2651	124	2648	125
481.wrf	24	1113	241	1116	240	<b>1116</b>	<b>240</b>	24	1076	249	1083	247	<b>1079</b>	<b>248</b>
482.sphinx3	24	1587	295	<b>1599</b>	<b>293</b>	1612	290	24	<b>1491</b>	<b>314</b>	1497	313	1488	314

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr\_hugepages=10800 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro**

**SPECfp\_rate2006 = 276**

**Motherboard H8QI6-F, AMD Opteron 8435**

**SPECfp\_rate\_base2006 = 251**

**CPU2006 license:** 001176

**Test date:** Nov-2009

**Test sponsor:** Supermicro

**Hardware Availability:** Jun-2009

**Tested by:** Supermicro

**Software Availability:** Apr-2009

## General Notes

Environment variables set by runspec before the start of the run:

HUGETLB\_LIMIT = "450"

LD\_LIBRARY\_PATH = "/spec/amd0905is-libs/64:/spec/amd0905is-libs/32"

NCPUS = "6"

PGI\_HUGE\_PAGES = "450"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

System was tested in an open environment.

To ensure system stability, a 1000W (minimum) ATX power supply [ 8-pin & 8-pin (+12V) and 24-pin are required ]

Product description can be obtained at:

<http://www.supermicro.com/Aplus/motherboard/Opteron8000/SR56x0/H8QI6-F.cfm>

## Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -Mnomain  
 436.cactusADM: -DSPEC\_CPU\_LP64 -Mnomain  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -Mnomain  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro**

**SPECfp\_rate2006 = 276**

**Motherboard H8QI6-F, AMD Opteron 8435**

**SPECfp\_rate\_base2006 = 251**

**CPU2006 license:** 001176

**Test date:** Nov-2009

**Test sponsor:** Supermicro

**Hardware Availability:** Jun-2009

**Tested by:** Supermicro

**Software Availability:** Apr-2009

## Base Portability Flags (Continued)

481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-fastsse -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline  
-tp shanghai-64 -Bstatic\_pgi

C++ benchmarks:

-fastsse -Msmartalloc=huge -Mfprelaxed --zc\_eh -Mipa=fast  
-Mipa=inline -tp shanghai-64 -Bstatic\_pgi

Fortran benchmarks:

-fastsse -Msmartalloc=huge -Mfprelaxed -Mvect=short -Mipa=fast  
-Mipa=inline -tp shanghai-64 -Bstatic\_pgi

Benchmarks using both Fortran and C:

-fastsse -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline  
-tp shanghai-64 -Mvect=short -Bstatic\_pgi

## Base Other Flags

C benchmarks:

-Mipa=jobs:4

C++ benchmarks:

-Mipa=jobs:4

Fortran benchmarks:

-Mipa=jobs:4

Benchmarks using both Fortran and C:

-Mipa=jobs:4

## Peak Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks (except as noted below):

openCC

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp\_rate2006 = 276

Motherboard H8QI6-F, AMD Opteron 8435

SPECfp\_rate\_base2006 = 251

CPU2006 license: 001176

Test date: Nov-2009

Test sponsor: Supermicro

Hardware Availability: Jun-2009

Tested by: Supermicro

Software Availability: Apr-2009

## Peak Compiler Invocation (Continued)

444.namd: pgcpp

Fortran benchmarks (except as noted below):

openf95

410.bwaves: pgf95

434.zeusmp: pgf95

437.leslie3d: pgf95

Benchmarks using both Fortran and C (except as noted below):

pgcc pgf95

435.gromacs: opencc openf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64  
 436.cactusADM: -DSPEC\_CPU\_LP64 -Mnomain  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -Mnomain  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -fastsse -Msmartalloc=huge -Mprefetch=t0 -Mloop32  
-Mfprelaxed -Mipa=fast -Mipa=inline -tp shanghai-64  
-Bstatic\_pgi

482.sphinx3: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)  
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse  
-Mfprelaxed -Msmartalloc -tp shanghai-64 -Bstatic\_pgi

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp\_rate2006 = 276

Motherboard H8QI6-F, AMD Opteron 8435

SPECfp\_rate\_base2006 = 251

CPU2006 license: 001176

Test date: Nov-2009

Test sponsor: Supermicro

Hardware Availability: Jun-2009

Tested by: Supermicro

Software Availability: Apr-2009

## Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)  
 -Mipa=inline(pass 2) -fastsse -Munroll=n:4 -Munroll=m:8  
 -Msmartalloc=huge -Mnodepchk -Mfprelaxed --zc\_eh  
 -tp shanghai-64 -Bstatic\_pgi

447.dealIII: -march=barcelona -Ofast -static -INLINE:aggressive=on  
 -LNO:opt=0 -Wf,-fno-exceptions -m32 -OPT:unroll\_times\_max=8  
 -OPT:unroll\_size=256 -OPT:unroll\_level=2 -HP:bdt=2m:heap=2m  
 -GRA:unspill=on -CG:cmp\_peep=on -TENV:frame\_pointer=off

450.soplex: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -INLINE:aggressive=on  
 -OPT:IEEE\_arith=3 -OPT:IEEE\_NaN\_Inf=off  
 -OPT:fold\_unsigned\_relops=on -OPT:malloc\_alg=1  
 -CG:load\_exe=0 -fno-exceptions -m32 -HP:bdt=2m

453.povray: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on  
 -HP:bdt=2m:heap=2m

Fortran benchmarks:

410.bwaves: -fastsse -Msmartalloc -Mprefetch=nta -Mfprelaxed  
 -Mipa=fast -Mipa=inline -tp shanghai-64 -Bstatic\_pgi

416.gamess: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O2 -OPT:Ofast -OPT:ro=3  
 -OPT:unroll\_size=256 -HP:bdt=2m:heap=2m

434.zeusmp: -fastsse -Mfprelaxed -Mprefetch=distance:8 -Mprefetch=t0  
 -Msmartalloc=huge -Msmartalloc=hugebss -Mipa=fast  
 -Mipa=inline -tp shanghai-64 -Bstatic\_pgi

437.leslie3d: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)  
 -Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse  
 -Mvect=fuse -Msmartalloc=huge -Mprefetch=distance:8  
 -Mprefetch=t0 -Mfprelaxed -tp shanghai-64 -Bstatic\_pgi

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2  
 -LNO:prefetch\_ahead=1 -CG:load\_exe=0 -HP

465.tonto: -march=barcelona -Ofast -OPT:alias=no\_f90\_pointer\_alias  
 -LNO:blocking=off -CG:load\_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp\_rate2006 = 276

Motherboard H8QI6-F, AMD Opteron 8435

SPECfp\_rate\_base2006 = 251

CPU2006 license: 001176

Test date: Nov-2009

Test sponsor: Supermicro

Hardware Availability: Jun-2009

Tested by: Supermicro

Software Availability: Apr-2009

## Peak Optimization Flags (Continued)

435.gromacs: -march=barcelona -Ofast -OPT:rsqrt=2 -HP:bdt=2m:heap=2m

436.cactusADM: -fastsse -Mconcur -Msmartalloc=huge -Mfprelaxed -Mipa=fast  
-Mipa=inline -tp shanghai-64 -Bstatic\_pgi

454.calculix: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)  
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse  
-Mvect=short -Msmartalloc=huge -Mprefetch=t0 -Mpre  
-Mfprelaxed -tp shanghai-64 -Bstatic\_pgi

481.wrf: -fastsse -Mvect=noaltcode -Msmartalloc=huge  
-Mprefetch=distance:8 -Mfprelaxed -tp shanghai-64  
-Bstatic\_pgi

## Peak Other Flags

C benchmarks:

-Mipa=jobs:4(pass 2)

C++ benchmarks:

444.namd: -Mipa=jobs:4(pass 2)

Fortran benchmarks:

410.bwaves: -Mipa=jobs:4

434.zeusmp: -Mipa=jobs:4

437.leslie3d: -Mipa=jobs:4(pass 2)

Benchmarks using both Fortran and C:

436.cactusADM: -Mipa=jobs:4

454.calculix: -Mipa=jobs:4(pass 2)

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd-platform.20090710.html>

[http://www.spec.org/cpu2006/flags/pgi80\\_linux\\_flags-revA.html](http://www.spec.org/cpu2006/flags/pgi80_linux_flags-revA.html)

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/amd-platform.20090710.xml>

[http://www.spec.org/cpu2006/flags/pgi80\\_linux\\_flags-revA.xml](http://www.spec.org/cpu2006/flags/pgi80_linux_flags-revA.xml)

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revE.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp\_rate2006 = 276

Motherboard H8QI6-F, AMD Opteron 8435

SPECfp\_rate\_base2006 = 251

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2009

Hardware Availability: Jun-2009

Software Availability: Apr-2009

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 03:52:10 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 22 December 2009.