



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS100-E6 (P7F-M) server system (Intel Xeon X3470)

**SPECfp®\_rate2006 = 91.2**

**SPECfp\_rate\_base2006 = 87.5**

CPU2006 license: 9016


Test date: Nov-2009

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Sep-2009

Tested by: ASUSTeK Computer Inc.

Software Availability: Jul-2009

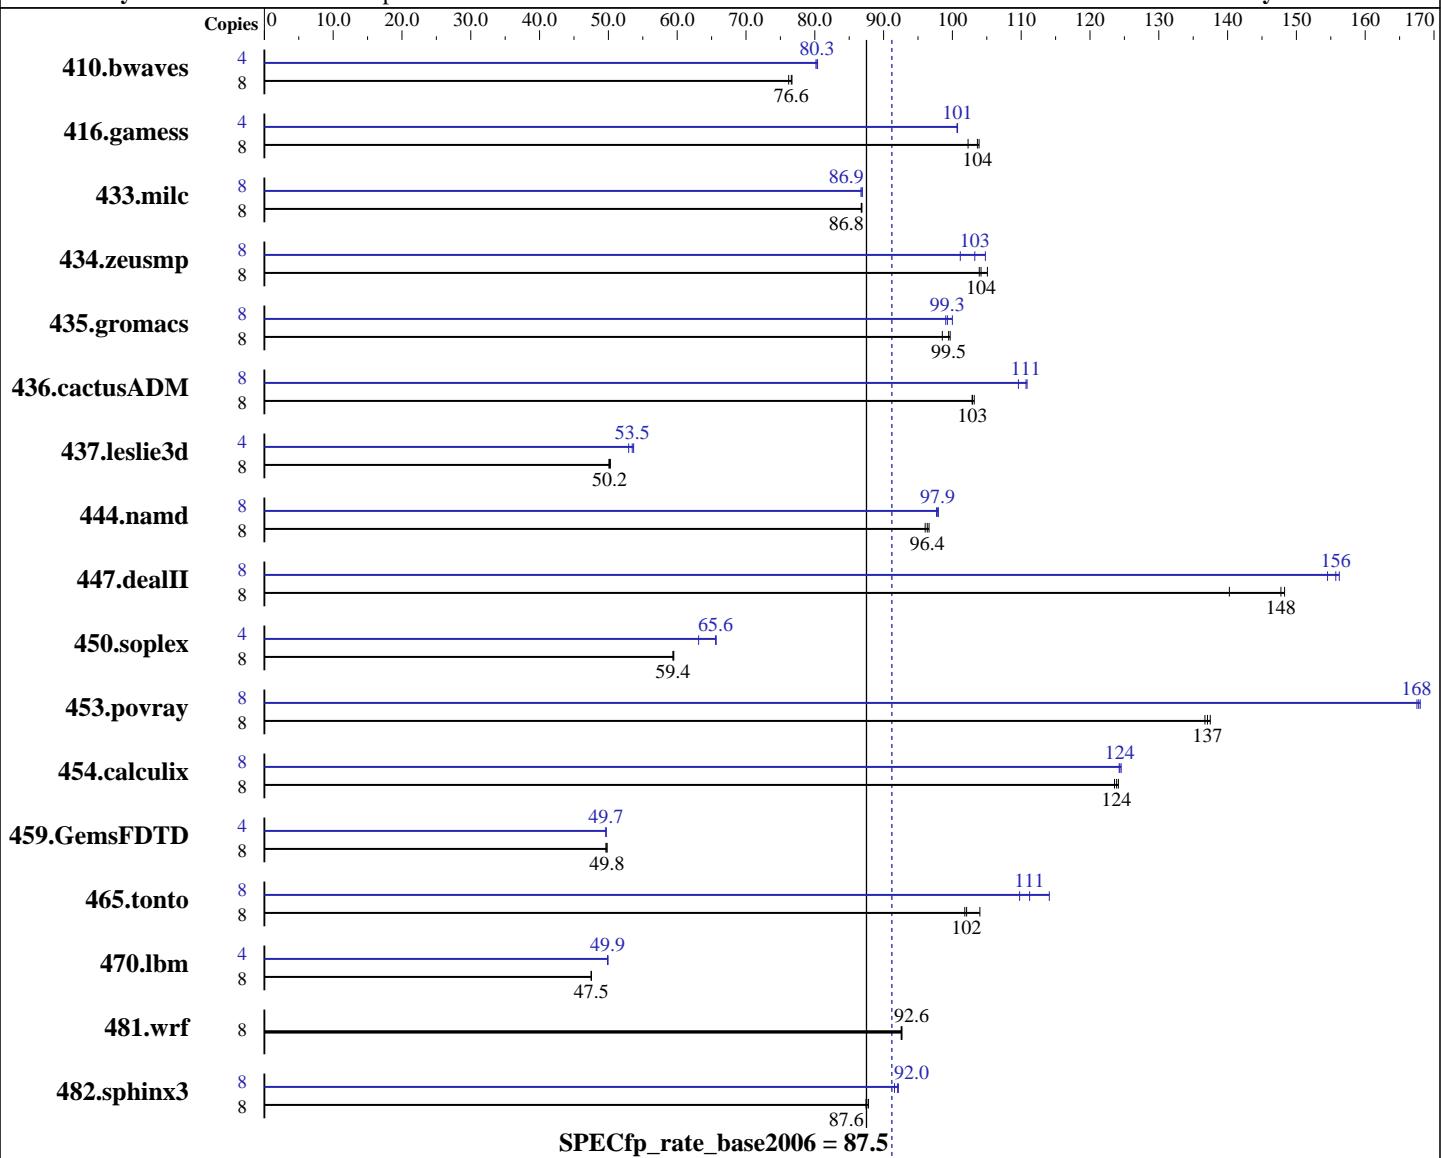

### Hardware

CPU Name: Intel Xeon X3470  
CPU Characteristics: Intel Turbo Boost Technology up to 3.6 GHz  
CPU MHz: 2933  
FPU: Integrated  
CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core  
CPU(s) orderable: 1 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-default  
Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20090511 Package ID: l\_cproc\_p\_11.1.040, l\_cprof\_p\_11.1.040  
Auto Parallel:  
File System: ReiserFS  
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS100-E6 (P7F-M) server system (Intel Xeon X3470)

**SPECfp\_rate2006 = 91.2**

**SPECfp\_rate\_base2006 = 87.5**

**CPU2006 license:** 9016

**Test date:** Nov-2009

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Sep-2009

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Jul-2009

L3 Cache: 8 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 16 GB (4 x 4 GB PC3-10600R, CL=9)  
 Disk Subsystem: 1 x 250 GB SATAII, 7200RPM  
 Other Hardware: None

Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Binutils 2.18.50.0.7.20080502

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1427	76.2	<b>1420</b>	<b>76.6</b>	1418	76.7	4	678	80.2	<b>677</b>	<b>80.3</b>	676	80.4
416.gamess	8	1508	104	1532	102	<b>1511</b>	<b>104</b>	4	778	101	<b>777</b>	<b>101</b>	777	101
433.milc	8	846	86.9	847	86.8	<b>846</b>	<b>86.8</b>	8	845	86.9	<b>845</b>	<b>86.9</b>	847	86.7
434.zeusmp	8	701	104	<b>699</b>	<b>104</b>	693	105	8	695	105	720	101	<b>705</b>	<b>103</b>
435.gromacs	8	<b>574</b>	<b>99.5</b>	573	99.7	580	98.5	8	571	100	577	99.0	<b>575</b>	<b>99.3</b>
436.cactusADM	8	<b>929</b>	<b>103</b>	929	103	927	103	8	862	111	872	110	<b>864</b>	<b>111</b>
437.leslie3d	8	1502	50.1	<b>1499</b>	<b>50.2</b>	1495	50.3	4	<b>703</b>	<b>53.5</b>	710	52.9	701	53.7
444.namd	8	668	96.0	<b>666</b>	<b>96.4</b>	664	96.6	8	<b>656</b>	<b>97.9</b>	657	97.7	655	98.0
447.dealII	8	653	140	617	148	<b>619</b>	<b>148</b>	8	586	156	592	155	<b>588</b>	<b>156</b>
450.soplex	8	1121	59.5	1123	59.4	<b>1123</b>	<b>59.4</b>	4	529	63.1	508	65.7	<b>509</b>	<b>65.6</b>
453.povray	8	<b>310</b>	<b>137</b>	310	137	311	137	8	254	168	<b>254</b>	<b>168</b>	253	168
454.calculix	8	<b>533</b>	<b>124</b>	532	124	534	124	8	530	125	<b>531</b>	<b>124</b>	531	124
459.GemsFDTD	8	1710	49.6	1704	49.8	<b>1705</b>	<b>49.8</b>	4	855	49.6	<b>855</b>	<b>49.7</b>	855	49.7
465.tonto	8	<b>771</b>	<b>102</b>	757	104	773	102	8	<b>708</b>	<b>111</b>	717	110	690	114
470.lbm	8	2313	47.5	2314	47.5	<b>2313</b>	<b>47.5</b>	4	1102	49.9	<b>1102</b>	<b>49.9</b>	1101	49.9
481.wrf	8	<b>965</b>	<b>92.6</b>	964	92.7	965	92.6	8	<b>965</b>	<b>92.6</b>	964	92.7	965	92.6
482.sphinx3	8	1783	87.4	<b>1781</b>	<b>87.6</b>	1776	87.8	8	<b>1702</b>	<b>91.6</b>	<b>1694</b>	<b>92.0</b>	1692	92.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
 numactl was used to bind copies to the cores

## Component Notes

Tested system case compliance with Intel ATX or SSI spec  
 390W or higher ATX Power Supply, 350W or higher SSI Server Power Supply  
 System was configured with ASPEED AST2050 VGA (on board VGA)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS100-E6 (P7F-M) server system (Intel Xeon X3470)

**SPECfp\_rate2006 = 91.2**

**SPECfp\_rate\_base2006 = 87.5**

**CPU2006 license:** 9016

**Test sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test date:** Nov-2009

**Hardware Availability:** Sep-2009

**Software Availability:** Jul-2009

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS100-E6 (P7F-M) server system (Intel Xeon X3470)

**SPECfp\_rate2006 = 91.2**

**SPECfp\_rate\_base2006 = 87.5**

**CPU2006 license:** 9016

**Test date:** Nov-2009

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Sep-2009

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Jul-2009

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks (except as noted below):

ifort -m64

437.leslie3d: ifort -m32

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
  433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
  444.namd: -DSPEC_CPU_LP64
  447.dealII: -DSPEC_CPU_LP64
  453.povray: -DSPEC_CPU_LP64
  454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
  465.tonto: -DSPEC_CPU_LP64
  470.lbm: -DSPEC_CPU_LP64
  481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
  -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
  -fno-alias

```

```

470.lbm: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
  -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
  -opt-prefetch -opt-malloc-options=3 -auto-ilp32

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS100-E6 (P7F-M) server system (Intel Xeon X3470)

**SPECfp\_rate2006 = 91.2**

**SPECfp\_rate\_base2006 = 87.5**

**CPU2006 license:** 9016

**Test date:** Nov-2009

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Sep-2009

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Jul-2009

## Peak Optimization Flags (Continued)

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
 -fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
 -unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
 -opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
 -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
 -unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)

437.leslie3d: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
 -opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
 -unroll2 -Ob0 -opt-prefetch

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
 -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
 -opt-prefetch -auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS100-E6 (P7F-M) server system (Intel Xeon X3470)

**SPECfp\_rate2006 = 91.2**

**SPECfp\_rate\_base2006 = 87.5**

**CPU2006 license:** 9016

**Test date:** Nov-2009

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Sep-2009

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Jul-2009

## Peak Optimization Flags (Continued)

436.cactusADM: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -opt-prefetch -auto-ilp32

454.calculix: -xsse4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revD.20091222.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revD.20091222.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 04:01:11 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 22 December 2009.