



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp[®]_rate2006 = 84.7

CELSIUS W380, Intel Xeon X3450

SPECfp_rate_base2006 = 82.3

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Dec-2009

Hardware Availability: Feb-2010

Software Availability: Oct-2009

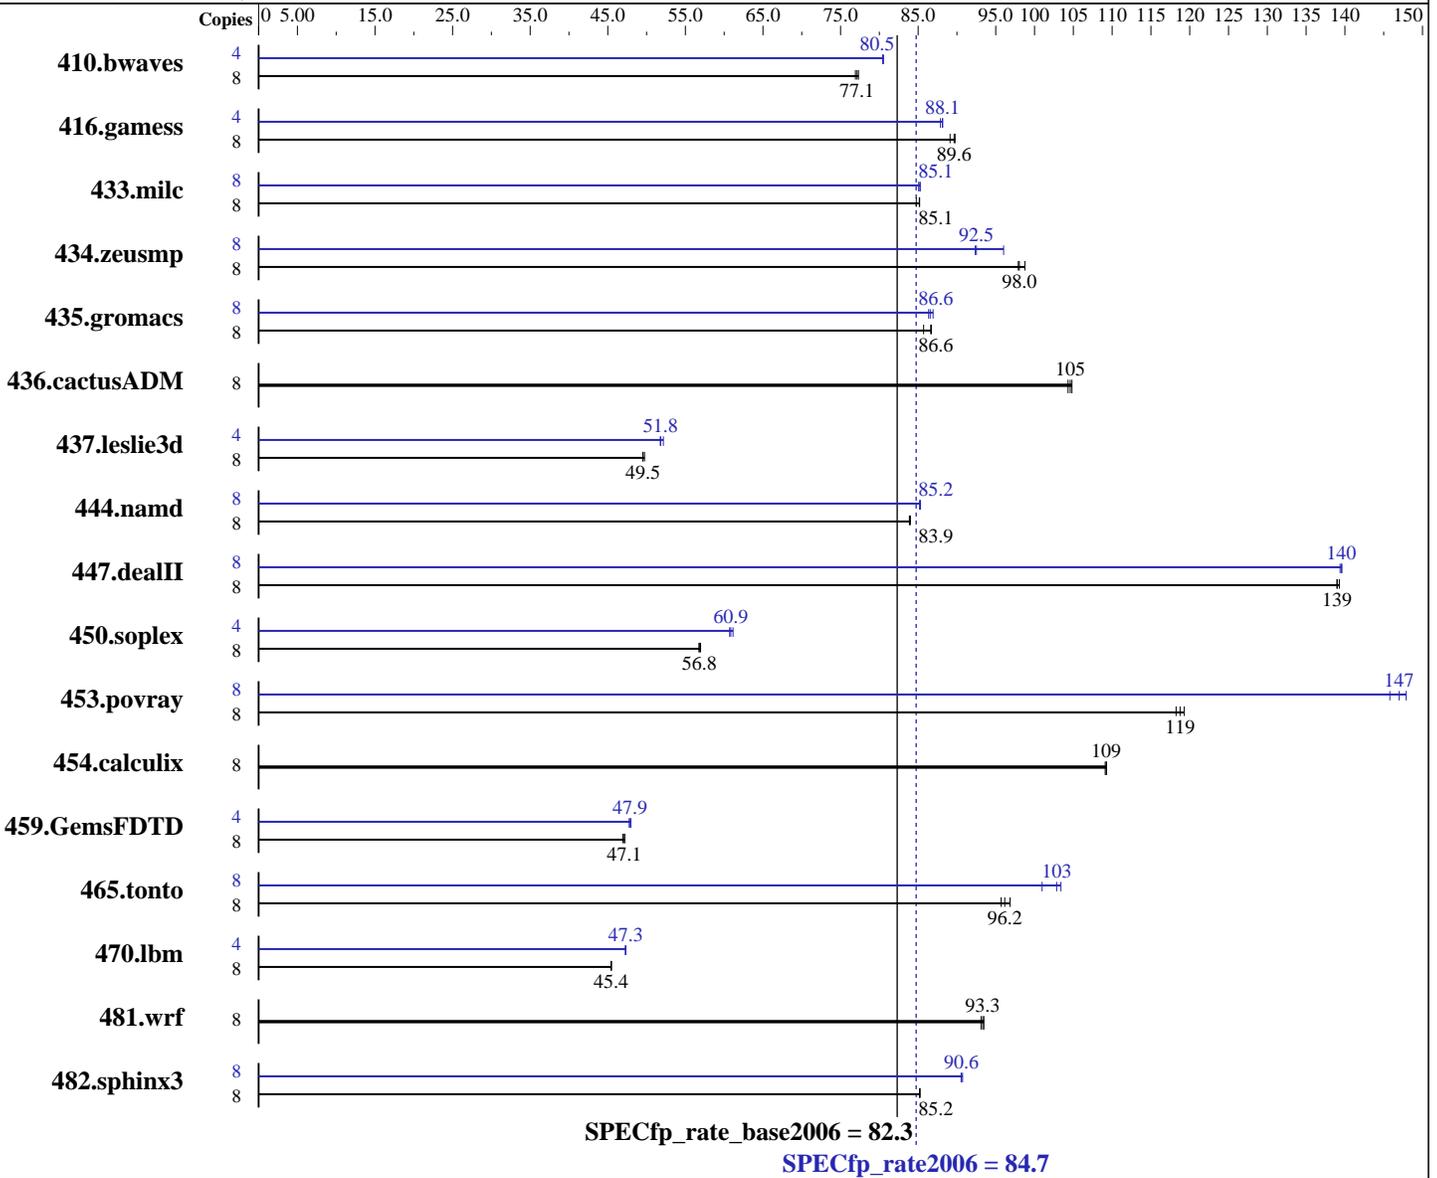

Hardware

CPU Name: Intel Xeon X3450
 CPU Characteristics: Intel Turbo Boost Technology up to 3.2 GHz
 CPU MHz: 2667
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64), kernel 2.6.27.19-5-default
 Compiler: Intel C++ and Fortran Compiler for IA32 and Intel 64, Version 11.1 Build 20091012 Package ID: l_cproc_p_11.1.059, l_cprof_p_11.1.059
 Auto Parallel: No
 File System: ext3
 System State: Multi-User Run Level 3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 84.7

CELSIUS W380, Intel Xeon X3450

SPECfp_rate_base2006 = 82.3

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Dec-2009

Hardware Availability: Feb-2010

Software Availability: Oct-2009

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 8 GB (2x4 GB PC3 10600U, 2 rank, CL9)
Disk Subsystem: 1 x SATA II, 400 GB, 7200 rpm
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1414	76.9	1406	77.3	1410	77.1	4	676	80.5	676	80.4	675	80.5
416.gamess	8	1758	89.1	1745	89.8	1748	89.6	4	891	87.9	888	88.2	889	88.1
433.milc	8	866	84.8	862	85.2	862	85.1	8	861	85.3	863	85.1	863	85.1
434.zeusmp	8	737	98.8	743	98.0	744	97.9	8	788	92.4	758	96.0	787	92.5
435.gromacs	8	659	86.7	666	85.7	659	86.6	8	657	86.9	660	86.6	661	86.4
436.cactusADM	8	914	105	912	105	916	104	8	914	105	912	105	916	104
437.leslie3d	8	1519	49.5	1512	49.7	1518	49.5	4	726	51.8	726	51.8	721	52.2
444.namd	8	764	84.0	765	83.9	765	83.9	8	753	85.2	753	85.2	752	85.3
447.dealII	8	658	139	657	139	659	139	8	656	140	656	140	657	139
450.soplex	8	1175	56.8	1176	56.8	1171	57.0	4	550	60.7	546	61.1	548	60.9
453.povray	8	360	118	358	119	357	119	8	290	147	288	148	292	146
454.calculix	8	604	109	605	109	604	109	8	604	109	605	109	604	109
459.GemsFDTD	8	1801	47.1	1799	47.2	1808	47.0	4	885	48.0	886	47.9	889	47.8
465.tonto	8	813	96.8	823	95.7	819	96.2	8	780	101	765	103	761	103
470.lbm	8	2417	45.5	2419	45.4	2420	45.4	4	1161	47.3	1163	47.3	1162	47.3
481.wrf	8	956	93.5	960	93.1	958	93.3	8	956	93.5	960	93.1	958	93.3
482.sphinx3	8	1829	85.3	1831	85.2	1830	85.2	8	1719	90.7	1722	90.5	1721	90.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Base Compiler Invocation

C benchmarks:
icc -m64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 84.7

CELSIUS W380, Intel Xeon X3450

SPECfp_rate_base2006 = 82.3

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Dec-2009

Hardware Availability: Feb-2010

Software Availability: Oct-2009

Base Compiler Invocation (Continued)

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 84.7

CELSIUS W380, Intel Xeon X3450

SPECfp_rate_base2006 = 82.3

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Dec-2009

Hardware Availability: Feb-2010

Software Availability: Oct-2009

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -fno-alias -opt-prefetch

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -opt-malloc-options=3 -ansi-alias -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 84.7

CELSIUS W380, Intel Xeon X3450

SPECfp_rate_base2006 = 82.3

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Dec-2009

Hardware Availability: Feb-2010

Software Availability: Oct-2009

Peak Optimization Flags (Continued)

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)

437.leslie3d: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 84.7

CELSIUS W380, Intel Xeon X3450

SPECfp_rate_base2006 = 82.3

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Dec-2009

Hardware Availability: Feb-2010

Software Availability: Oct-2009

Peak Optimization Flags (Continued)

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revD.20100119.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revD.20100119.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 06:24:28 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 January 2010.