



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

**SPECfp®\_rate2006 = 168**

UCS C200 M1 (Intel Xeon E5540)

**SPECfp\_rate\_base2006 = 162**

CPU2006 license: 9019


Test date: Jan-2010

Test sponsor: Cisco Systems

Hardware Availability: Oct-2009

Tested by: Cisco Systems

Software Availability: Mar-2009

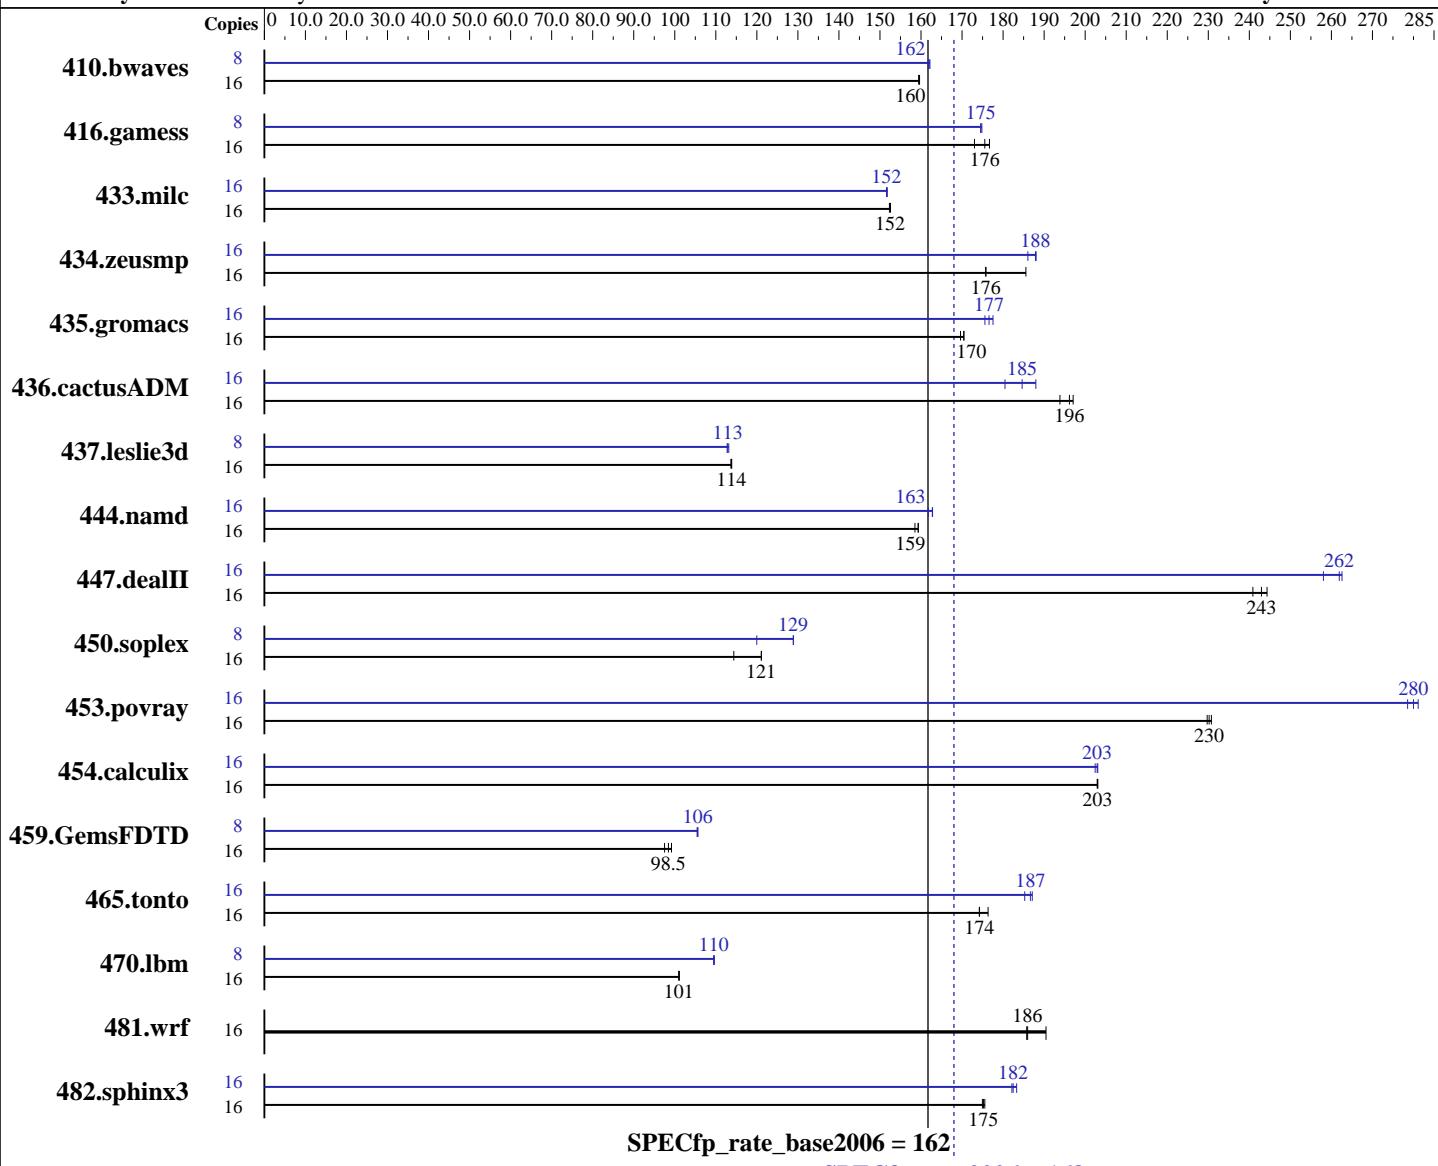

## Hardware

CPU Name: Intel Xeon E5540  
CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz  
CPU MHz: 2533  
FPU: Integrated  
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 Chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

## Software

Operating System: SuSe Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27-15-2-default, RC4  
Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20090131 Package ID: l\_cproc\_p\_11.0.080, l\_cprof\_p\_11.0.080  
Auto Parallel: No  
File System: ReiserFS  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems UCS C200 M1 (Intel Xeon E5540)	<b>SPECfp_rate2006 = 168</b>
CPU2006 license: 9019 Test sponsor: Cisco Systems Tested by: Cisco Systems	<b>Test date:</b> Jan-2010 <b>Hardware Availability:</b> Oct-2009 <b>Software Availability:</b> Mar-2009

L3 Cache: 8 MB I+D on chip per chip  
Other Cache: None  
Memory: 24 GB (12 \* 2GB DDR3-1066 MHz)  
Disk Subsystem: 73 GB SATA, 15kRPM  
Other Hardware: None

Peak Pointers: 32/64-bit  
Other Software: Binutils 2.18.50.0.7.20080502

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	<b>1363</b>	<b>160</b>	1362	160	1364	159	8	<b>671</b>	<b>162</b>	670	162	672	162
416.gamess	16	1773	177	<b>1785</b>	<b>176</b>	1811	173	8	<b>897</b>	<b>175</b>	896	175	897	175
433.milc	16	964	152	<b>963</b>	<b>152</b>	963	153	16	<b>969</b>	<b>152</b>	968	152	<b>969</b>	<b>152</b>
434.zeusmp	16	<b>828</b>	<b>176</b>	785	186	828	176	16	<b>775</b>	<b>188</b>	774	188	783	186
435.gromacs	16	<b>670</b>	<b>170</b>	673	170	670	170	16	643	178	651	176	<b>647</b>	<b>177</b>
436.cactusADM	16	986	194	970	197	<b>975</b>	<b>196</b>	16	1059	180	<b>1036</b>	<b>185</b>	1017	188
437.leslie3d	16	<b>1321</b>	<b>114</b>	1323	114	1321	114	8	667	113	<b>666</b>	<b>113</b>	665	113
444.namd	16	809	159	805	159	<b>806</b>	<b>159</b>	16	793	162	<b>788</b>	<b>163</b>	788	163
447.dealII	16	<b>753</b>	<b>243</b>	760	241	749	244	16	<b>699</b>	<b>262</b>	709	258	697	263
450.soplex	16	1167	114	<b>1102</b>	<b>121</b>	1102	121	8	556	120	<b>518</b>	<b>129</b>	518	129
453.povray	16	371	230	<b>370</b>	<b>230</b>	369	231	16	306	279	303	281	<b>304</b>	<b>280</b>
454.calculix	16	<b>650</b>	<b>203</b>	650	203	650	203	16	650	203	652	202	<b>650</b>	<b>203</b>
459.GemsFDTD	16	1711	99.2	1741	97.5	<b>1724</b>	<b>98.5</b>	8	<b>804</b>	<b>106</b>	805	105	804	106
465.tonto	16	904	174	893	176	<b>903</b>	<b>174</b>	16	841	187	850	185	<b>844</b>	<b>187</b>
470.lbm	16	<b>2177</b>	<b>101</b>	2177	101	2174	101	8	1003	110	<b>1003</b>	<b>110</b>	1004	109
481.wrf	16	938	190	962	186	<b>961</b>	<b>186</b>	16	938	190	962	186	<b>961</b>	<b>186</b>
482.sphinx3	16	1782	175	<b>1779</b>	<b>175</b>	1776	176	16	<b>1712</b>	<b>182</b>	1701	183	<b>1709</b>	<b>182</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

ulimit -s unlimited was used to set the stacksize to unlimited prior to run

## Base Compiler Invocation

C benchmarks:  
icc

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

UCS C200 M1 (Intel Xeon E5540)

**SPECfp\_rate2006 = 168**

**SPECfp\_rate\_base2006 = 162**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Jan-2010

**Hardware Availability:** Oct-2009

**Software Availability:** Mar-2009

## Base Compiler Invocation (Continued)

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.games: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
    453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

UCS C200 M1 (Intel Xeon E5540)

**SPECfp\_rate2006 = 168**

**SPECfp\_rate\_base2006 = 162**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Jan-2010

**Hardware Availability:** Oct-2009

**Software Availability:** Mar-2009

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc

450.soplex: icpc -m32

Fortran benchmarks (except as noted below):

ifort

437.leslie3d: ifort -m32

Benchmarks using both Fortran and C:

icc ifort

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias

470.lbm: -xsse4.2 -ipo -O3 -no-prec-div -static -opt-prefetch  
-auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

UCS C200 M1 (Intel Xeon E5540)

**SPECfp\_rate2006 = 168**

**SPECfp\_rate\_base2006 = 162**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Jan-2010

**Hardware Availability:** Oct-2009

**Software Availability:** Mar-2009

## Peak Optimization Flags (Continued)

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll12

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll12 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll12 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)

437.leslie3d: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll12 -Ob0 -opt-prefetch

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll14 -auto

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

UCS C200 M1 (Intel Xeon E5540)

**SPECfp\_rate2006 = 168**

**SPECfp\_rate\_base2006 = 162**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Jan-2010

**Hardware Availability:** Oct-2009

**Software Availability:** Mar-2009

## Peak Optimization Flags (Continued)

436.cactusADM: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll12 -opt-prefetch -auto-ilp32

454.calculix: -xsse4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revH.20100317.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revH.20100317.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 06:20:13 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 17 March 2010.