



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp®_rate2006 = 1300

IBM Power 780 (4.14 GHz, 32 core)

SPECfp_rate_base2006 = 1190

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jan-2010

Hardware Availability: Mar-2010

Software Availability: Mar-2010

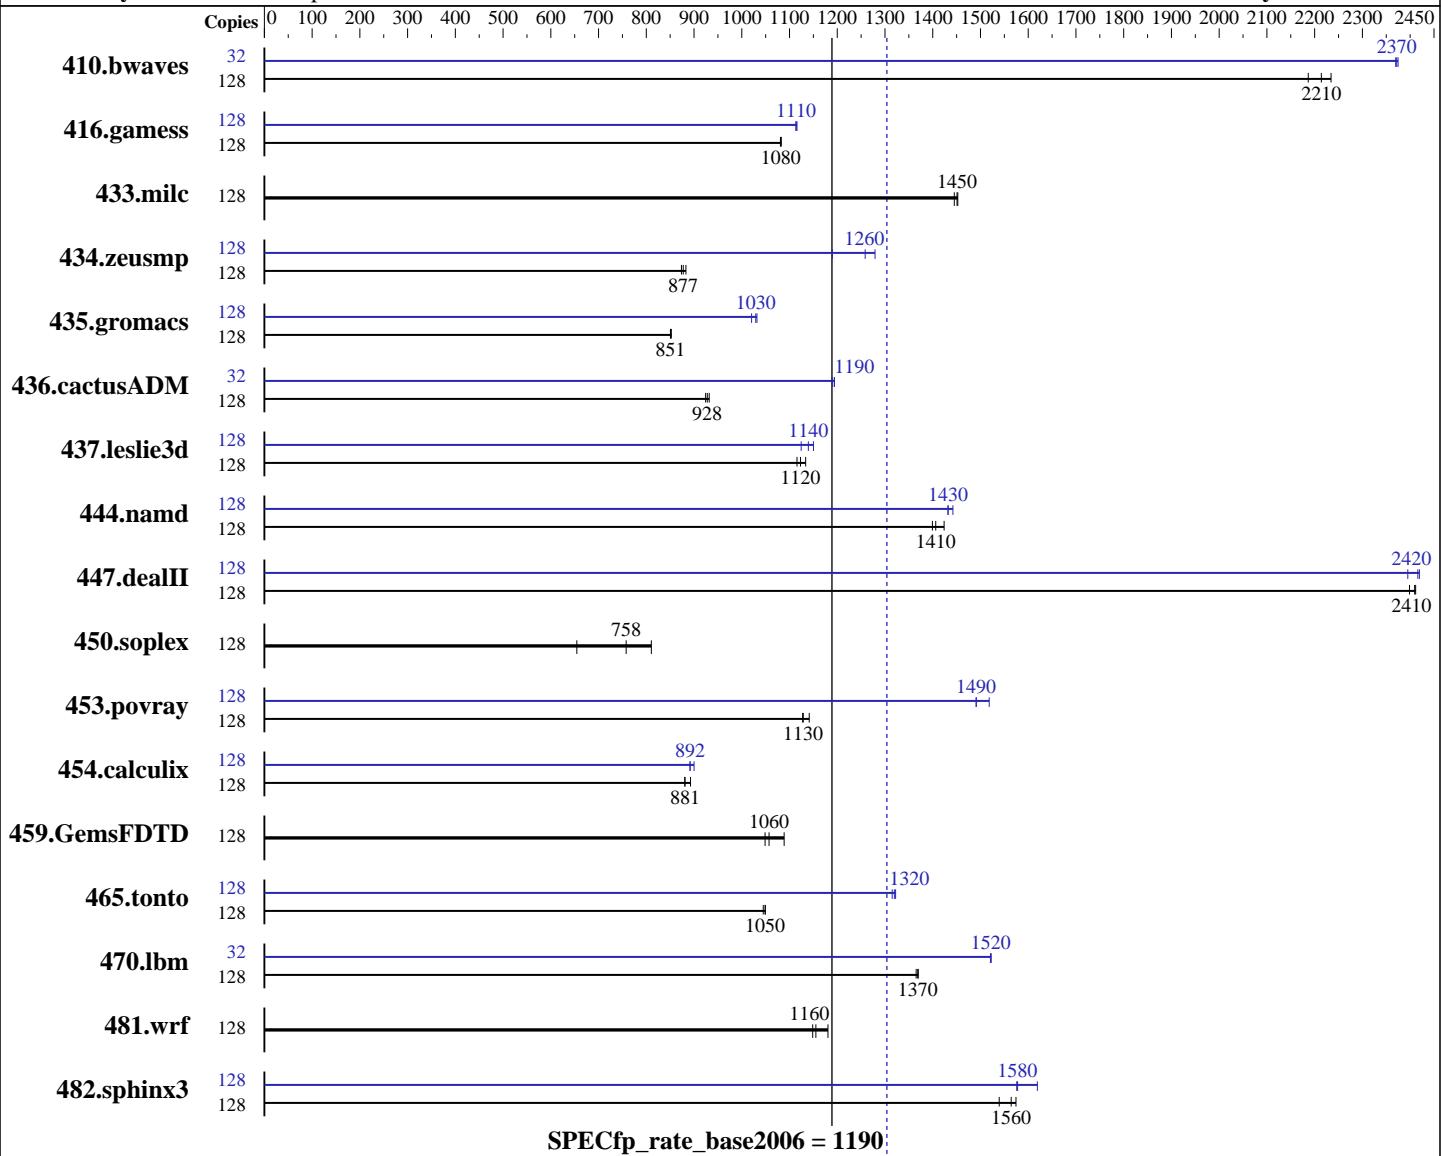

Hardware

CPU Name: POWER7
CPU Characteristics: TurboCore mode
CPU MHz: 4140
FPU: Integrated
CPU(s) enabled: 32 cores, 8 chips, 4 cores/chip, 4 threads/core
CPU(s) orderable: 8,16,24,32,48,64 cores
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 512 KB I+D on chip per core

Software

Operating System: IBM AIX V6.1 with the 6100-04 Technology Level and Service Pack 3
Compiler: XL C/C++ Enterprise Edition V10.1.0.5 for AIX
XL Fortran Enterprise Edition V12.1.0.6 for AIX
Auto Parallel: No
File System: AIX/JFS2
System State: Multi-user
Base Pointers: 32-bit
Peak Pointers: 32/64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 1300

IBM Power 780 (4.14 GHz, 32 core)

SPECfp_rate_base2006 = 1190

CPU2006 license: 11

Test date: Jan-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Mar-2010

L3 Cache: 4 MB I+D on chip per core
 Other Cache: 16 MB I+D on chip per chip
 Memory: 512 GB (64x8 GB) DDR3 1066 MHz
 Disk Subsystem: 12x146.8 GB SAS SFF 15K RPM
 Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	128	796	2190	786	2210	779	2230	32	184	2370	183	2370	183	2370
416.gamess	128	2317	1080	2315	1080	2319	1080	128	2250	1110	2251	1110	2246	1120
433.milc	128	813	1450	810	1450	809	1450	128	813	1450	810	1450	809	1450
434.zeusmp	128	1333	874	1328	877	1319	883	128	979	1190	926	1260	911	1280
435.gromacs	128	1074	851	1074	851	1072	852	128	888	1030	886	1030	896	1020
436.cactusADM	128	1655	924	1649	928	1642	932	32	320	1190	320	1190	321	1190
437.leslie3d	128	1061	1130	1071	1120	1078	1120	128	1070	1120	1046	1150	1056	1140
444.namd	128	730	1410	734	1400	721	1420	128	717	1430	717	1430	712	1440
447.dealII	128	608	2410	610	2400	607	2410	128	606	2420	605	2420	611	2400
450.soplex	128	1409	758	1317	811	1631	654	128	1409	758	1317	811	1631	654
453.povray	128	597	1140	604	1130	603	1130	128	449	1520	457	1490	457	1490
454.calculix	128	1183	893	1198	881	1199	881	128	1173	900	1184	892	1184	892
459.GemsFDTD	128	1247	1090	1295	1050	1285	1060	128	1247	1090	1295	1050	1285	1060
465.tonto	128	1200	1050	1201	1050	1205	1050	128	953	1320	958	1320	954	1320
470.lbm	128	1284	1370	1285	1370	1288	1370	32	289	1520	289	1520	289	1520
481.wrf	128	1245	1150	1211	1180	1238	1160	128	1245	1150	1211	1180	1238	1160
482.sphinx3	128	1621	1540	1585	1570	1595	1560	128	1581	1580	1541	1620	1583	1580

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Peak Tuning Notes

fdpr binary optimization tool used for 410.bwaves
 with options -O3 -vrox -pbsi -A 64
 fdpr binary optimization tool used for 433.milc
 with options -O4 -vrox -pbsi
 fdpr binary optimization tool used for 434.zeusmp
 with options -O3 -vrox -sdp 9
 fdpr binary optimization tool used for 435.gromacs
 with options -O4 -vrox -pbsi
 fdpr binary optimization tool used for 437.leslie3d
 with options -O4 -vrox -pbsi
 fdpr binary optimization tool used for 450.soplex
 with options -O3 -vrox -sdp 9
 fdpr binary optimization tool used for 453.povray
 with options -O4 -vrox -pbsi

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 1300

IBM Power 780 (4.14 GHz, 32 core)

SPECfp_rate_base2006 = 1190

CPU2006 license: 11

Test date: Jan-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Mar-2010

Peak Tuning Notes (Continued)

```
fdpr binary optimization tool used for 454.calculix
with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 459.GemsFDTD
with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 470.lbm
with options -O3 -vrox -sdp 9
fdpr binary optimization tool used for 481.wrf
with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 482.sphinx3
with options -O4 -vrox -pbsi
```

Submit Notes

The config file option 'submit' was used
to assign benchmark copy to specific kernel thread using
the "bindprocessor" command (see flags file for details).

Operating System Notes

all ulimits set to unlimited.
25600 16M large pages defined with vmo command

General Notes

Environment variables set by runspec before the start of the run:
MALLOCOPTIONS = "pool"
MEMORY_AFFINITY = "MCM"
XLF RTEOPTS = "intrinthds=1"

See the flags file for details on settings.

Base Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlc

Fortran benchmarks:

/usr/bin/xlf95

Benchmarks using both Fortran and C:

/usr/vac/bin/xlc -qlanglvl=extc99 /usr/bin/xlf95



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 1300

IBM Power 780 (4.14 GHz, 32 core)

SPECfp_rate_base2006 = 1190

CPU2006 license: 11

Test date: Jan-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Mar-2010

Base Portability Flags

```
410.bwaves: -qfixed  
416.gamess: -qfixed  
434.zeusmp: -qfixed  
435.gromacs: -qfixed -qextname  
436.cactusADM: -qfixed -qextname  
437.leslie3d: -qfixed  
454.calculix: -qfixed -qextname  
481.wrf: -DSPEC_CPU_AIX -DNOUNDERSCORE  
482.sphinx3: -qchars=signed
```

Base Optimization Flags

C benchmarks:

```
-bmaxdata:0x40000000 -O5 -qlargepage -D_ILS_MACROS -blpdata
```

C++ benchmarks:

```
-bmaxdata:0x50000000 -O5 -qlargepage -D_ILS_MACROS -qrtti=all  
-D__IBM_FAST_VECTOR -D__IBM_FAST_SET_MAP_ITERATOR -blpdata
```

Fortran benchmarks:

```
-bmaxdata:0x60000000 -O5 -qlargepage -qsmallstack=dynlenonheap  
-qalias=nostd -blpdata
```

Benchmarks using both Fortran and C:

```
-bmaxdata:0x60000000 -O5 -qlargepage -D_ILS_MACROS  
-qsmallstack=dynlenonheap -qalias=nostd -blpdata
```

Base Other Flags

C benchmarks:

```
-qipa=threads -qipa=noobject -qsuppress=1500-036
```

C++ benchmarks:

```
-qipa=threads -qipa=noobject -qsuppress=1500-036
```

Fortran benchmarks:

```
-qipa=threads -qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg  
-qsuppress=1500-036
```

Benchmarks using both Fortran and C:

```
-qipa=threads -qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg  
-qsuppress=1500-036
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 1300

IBM Power 780 (4.14 GHz, 32 core)

SPECfp_rate_base2006 = 1190

CPU2006 license: 11

Test date: Jan-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Mar-2010

Peak Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlc

Fortran benchmarks:

/usr/bin/xlf95

Benchmarks using both Fortran and C:

/usr/vac/bin/xlc -qlanglvl=extc99 /usr/bin/xlf95

Peak Portability Flags

410.bwaves: -qfixed
416.gamess: -qfixed
434.zeusmp: -qfixed
435.gromacs: -qfixed -qextname
436.cactusADM: -qfixed -qextname
437.leslie3d: -qfixed
454.calculix: -qfixed -qextname
481.wrf: -DSPEC_CPU_AIX -DNOUNDERSCORE
482.sphinx3: -qchars=signed

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -qpdf1(pass 1) -qpdf2(pass 2) -O3 -qarch=auto -qtune=auto
-qlargepage -q64 -D_ILS_MACROS -qfdpr -blpdata

482.sphinx3: -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qlargepage
-D_ILS_MACROS -qfdpr -blpdata

C++ benchmarks:

444.namd: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage
-D_ILS_MACROS -blpdata

447.dealII: -bmaxdata:0x50000000 -O5 -D_ILS_MACROS -qrtti=all
-D__IBM_FAST_VECTOR -D__IBM_FAST_SET_MAP_ITERATOR -blpdata
-btexpsize:64K

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 1300

IBM Power 780 (4.14 GHz, 32 core)

SPECfp_rate_base2006 = 1190

CPU2006 license: 11

Test date: Jan-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Mar-2010

Peak Optimization Flags (Continued)

450.soplex: basepeak = yes

453.povray: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -D_ILS_MACROS
-qalign=natural -qfdpr -btextpsize:64K

Fortran benchmarks:

410.bwaves: -bmaxdata:0x50000000 -O5 -qlargepage -qenablevmx -qvecnvol
-qfdpr -qsmallstack=dynlenonheap -blpdata

416.gamess: -bmaxdata:0x40000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5
-qlargepage -qalias=nostd -blpdata

434.zeusmp: -bmaxdata:0x40000000 -qpdf1(pass 1) -qpdf2(pass 2) -O3
-qarch=auto -qtune=auto -qlargepage -qenablevmx -qvecnvol
-qxl90=nosignedzero -qfdpr -blpdata

437.leslie3d: -O5 -qlargepage -qenablevmx -qvecnvol -qfdpr -blpdata

459.GemsFDTD: basepeak = yes

465.tonto: -bmaxdata:0x50000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5
-blpdata -btextpsize:64K

Benchmarks using both Fortran and C:

435.gromacs: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -D_ILS_MACROS -qfdpr

436.cactusADM: -bmaxdata:0x60000000 -qpdf1(pass 1) -qpdf2(pass 2) -O2
-qarch=auto -qtune=auto -qenablevmx -qvecnvol
-D_ILS_MACROS -qfdpr -qnostrict -blpdata -btextpsize:64K

454.calculix: -O4 -qlargepage -q64 -D_ILS_MACROS -qfdpr -blpdata

481.wrf: basepeak = yes

Peak Other Flags

C benchmarks:

-qipa=threads -qipa=noobject -qsuppress=1500-036

C++ benchmarks:

-qipa=threads -qipa=noobject -qsuppress=1500-036

Fortran benchmarks:

-qipa=threads -qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg
-qsuppress=1500-036

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 1300

IBM Power 780 (4.14 GHz, 32 core)

SPECfp_rate_base2006 = 1190

CPU2006 license: 11

Test date: Jan-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Mar-2010

Peak Other Flags (Continued)

Benchmarks using both Fortran and C:

```
-qipa=threads -qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg  
-qsuppress=1500-036
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-XL.20100303.html>
<http://www.spec.org/cpu2006/flags/IBM-AIX.20100303.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/IBM-XL.20100303.xml>
<http://www.spec.org/cpu2006/flags/IBM-AIX.20100303.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 06:09:04 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 3 March 2010.