



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp[®]_rate2006 = 123

PowerEdge M610 (Intel Xeon E5507, 2.26 GHz)

SPECfp_rate_base2006 = 119

CPU2006 license: 55


Test date: Mar-2010

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Dec-2009

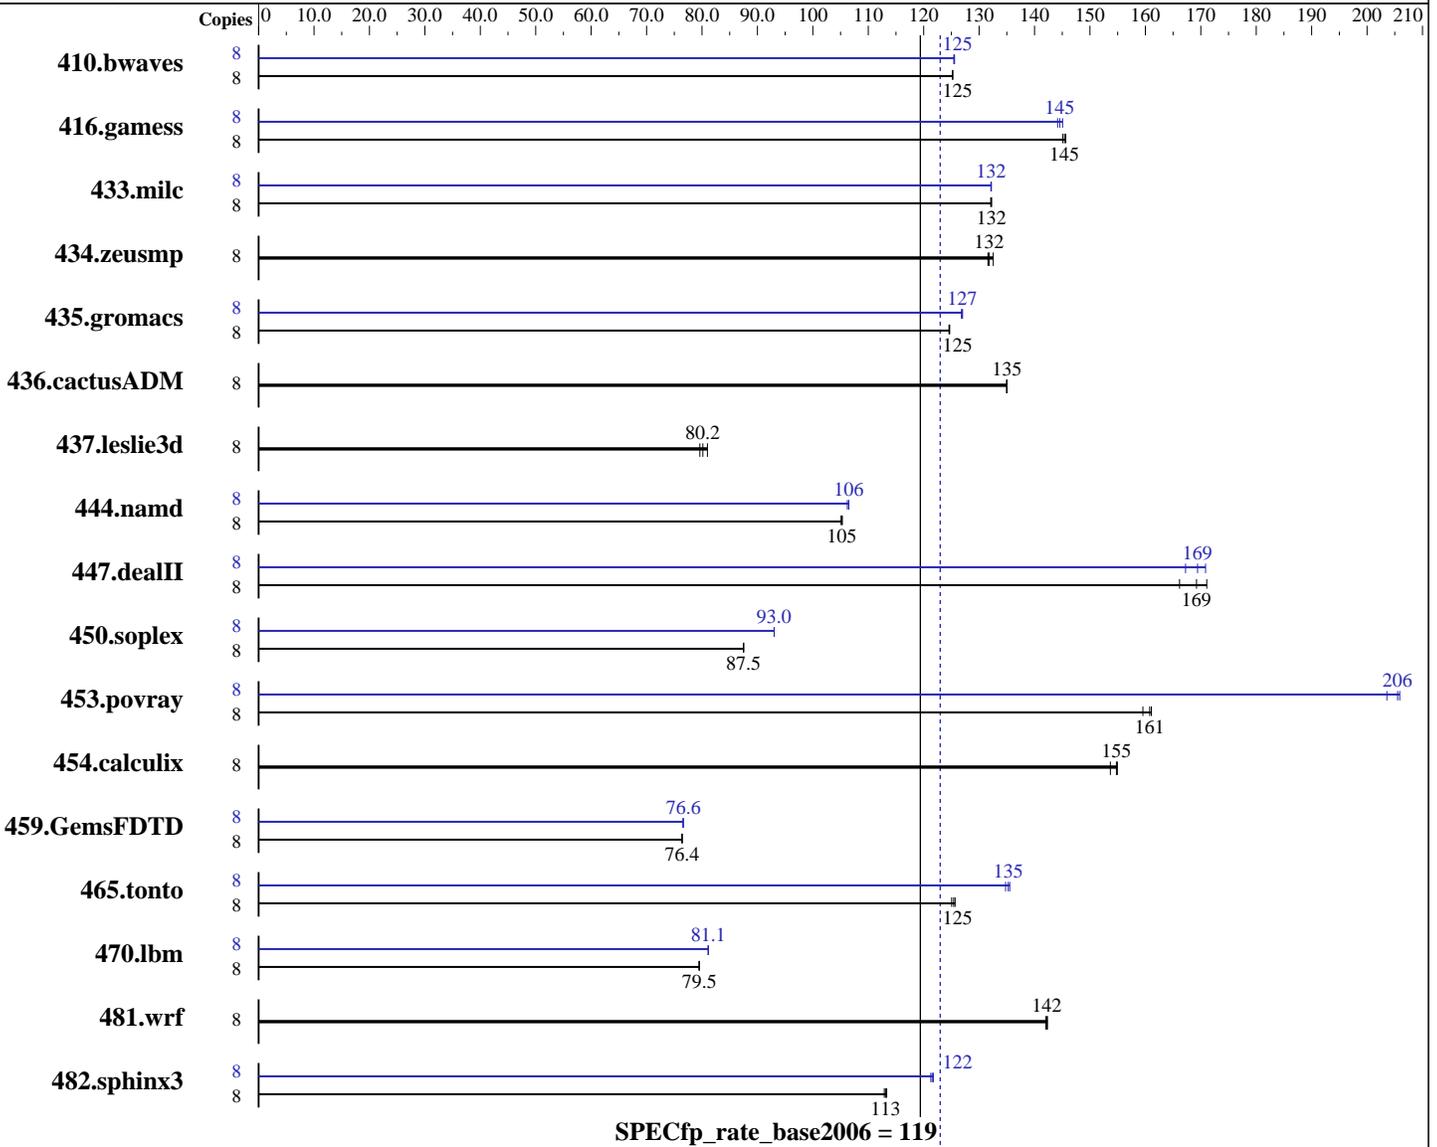

Hardware

CPU Name: Intel Xeon E5507
 CPU Characteristics:
 CPU MHz: 2267
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-smp
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064, l_cprof_p_11.1.064
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 123

PowerEdge M610 (Intel Xeon E5507, 2.26 GHz)

SPECfp_rate_base2006 = 119

CPU2006 license: 55

Test date: Mar-2010

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Dec-2009

L3 Cache: 4 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (12 x 4 GB DDR3-1333 DR RDIMM downclocked to 800 MHz)
Disk Subsystem: 1 x 146 GB 15000 RPM SAS
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	8	868	125	868	125	868	125	8	867	125	866	125	866	126		
416.gamess	8	1077	145	1076	146	1079	145	8	1084	145	1080	145	1087	144		
433.milc	8	556	132	555	132	555	132	8	556	132	555	132	556	132		
434.zeusmp	8	553	132	552	132	549	133	8	553	132	552	132	549	133		
435.gromacs	8	458	125	459	125	458	125	8	450	127	450	127	450	127		
436.cactusADM	8	708	135	708	135	708	135	8	708	135	708	135	708	135		
437.leslie3d	8	929	81.0	938	80.2	945	79.6	8	929	81.0	938	80.2	945	79.6		
444.namd	8	610	105	609	105	611	105	8	602	107	603	106	604	106		
447.dealII	8	551	166	535	171	541	169	8	536	171	540	169	547	167		
450.soplex	8	763	87.5	762	87.5	762	87.5	8	717	93.0	717	93.0	717	93.0		
453.povray	8	267	160	264	161	265	161	8	207	206	207	206	209	204		
454.calculix	8	426	155	429	154	426	155	8	426	155	429	154	426	155		
459.GemsFDTD	8	1111	76.4	1111	76.4	1111	76.4	8	1108	76.6	1108	76.6	1109	76.6		
465.tonto	8	626	126	630	125	628	125	8	582	135	581	136	584	135		
470.lbm	8	1383	79.5	1383	79.5	1383	79.5	8	1355	81.1	1355	81.1	1354	81.2		
481.wrf	8	628	142	629	142	628	142	8	628	142	629	142	628	142		
482.sphinx3	8	1378	113	1381	113	1376	113	8	1283	122	1286	121	1281	122		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

BIOS Settings:
Power Management = Maximum Performance (Default = Active Power Controller)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 123

PowerEdge M610 (Intel Xeon E5507, 2.26 GHz)

SPECfp_rate_base2006 = 119

CPU2006 license: 55

Test date: Mar-2010

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Dec-2009

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 123

PowerEdge M610 (Intel Xeon E5507, 2.26 GHz)

SPECfp_rate_base2006 = 119

CPU2006 license: 55

Test date: Mar-2010

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Dec-2009

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -fno-alias -opt-prefetch

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -opt-malloc-options=3 -ansi-alias -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 123

PowerEdge M610 (Intel Xeon E5507, 2.26 GHz)

SPECfp_rate_base2006 = 119

CPU2006 license: 55

Test date: Mar-2010

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Dec-2009

Peak Optimization Flags (Continued)

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 123

PowerEdge M610 (Intel Xeon E5507, 2.26 GHz)

SPECfp_rate_base2006 = 119

CPU2006 license: 55

Test date: Mar-2010

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Dec-2009

Peak Optimization Flags (Continued)

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 09:37:44 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 April 2010.