



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SPECfp<sup>®</sup>\_rate2006 = 239

Motherboard X8DTN+ (Intel Xeon X5650, 2.66 GHz)

SPECfp\_rate\_base2006 = 230

CPU2006 license: 001176


Test date: Mar-2010

Test sponsor: Supermicro

Hardware Availability: Mar-2010

Tested by: Supermicro

Software Availability: Jan-2010

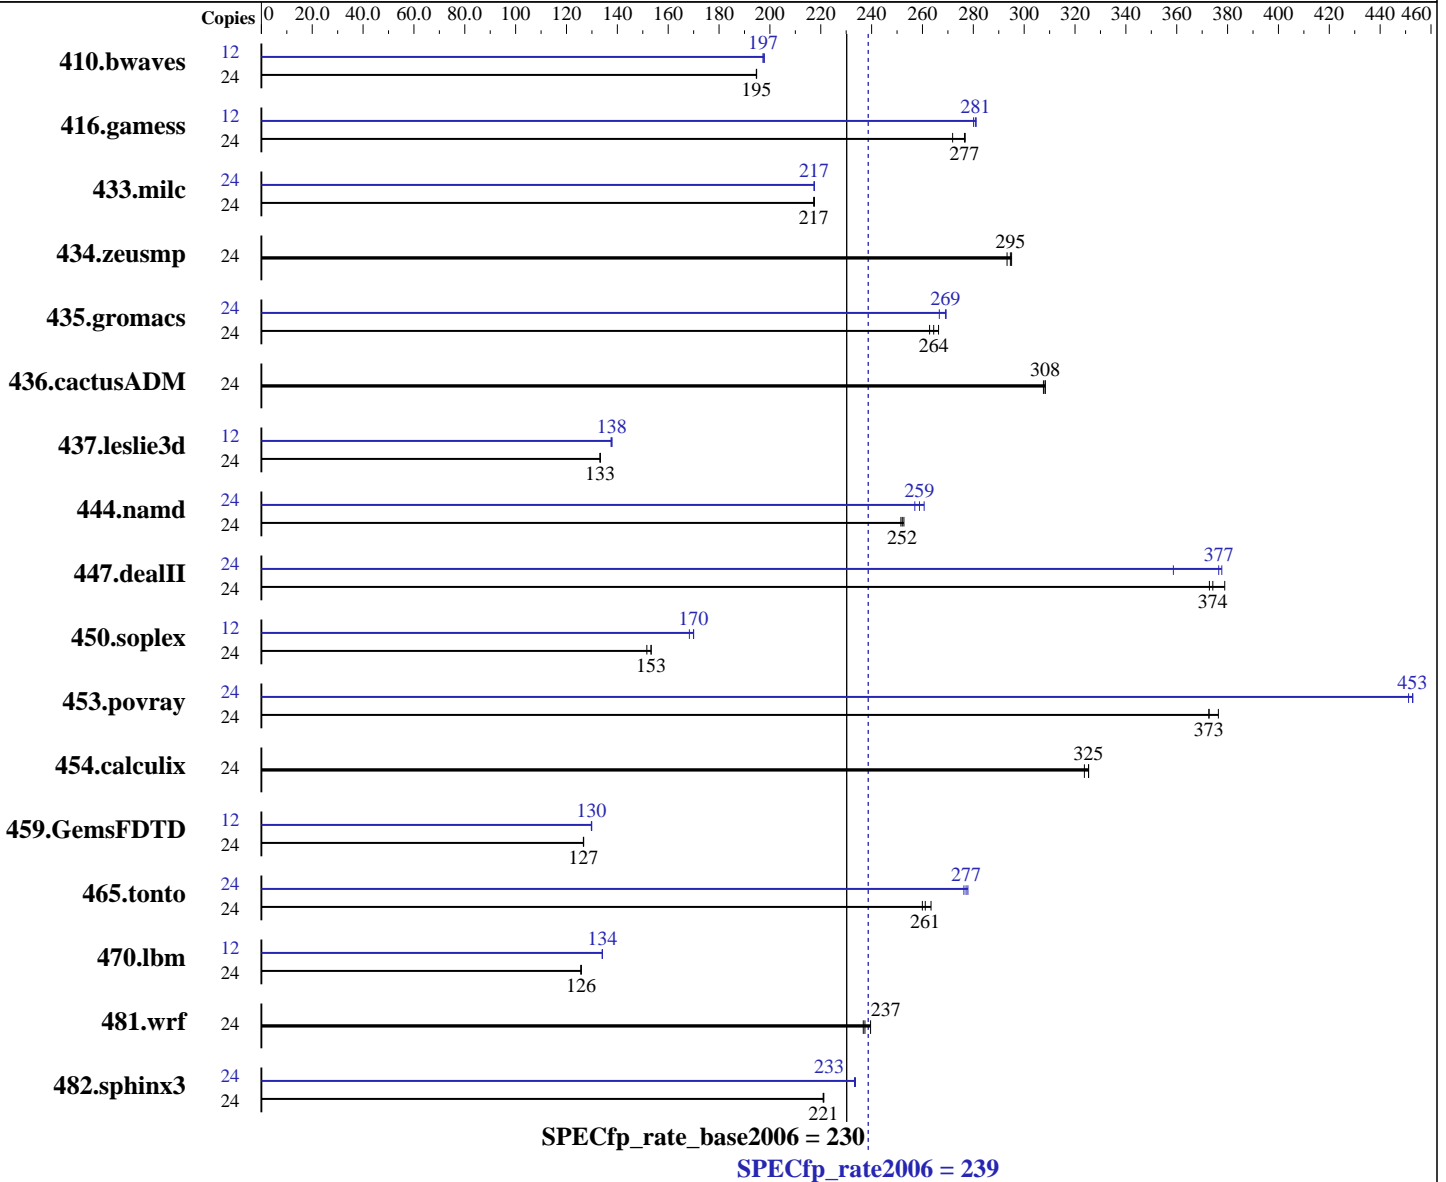

### Hardware

CPU Name: Intel Xeon X5650  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.06 GHz  
 CPU MHz: 2666  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64)  
 Kernel 2.6.27.19-5-default  
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1  
 Build 20091130 Package ID: l\_cproc\_p\_11.1.064, l\_cprof\_p\_11.1.064  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SPECfp\_rate2006 = 239

Motherboard X8DTN+ (Intel Xeon X5650, 2.66 GHz)

SPECfp\_rate\_base2006 = 230

CPU2006 license: 001176

Test date: Mar-2010

Test sponsor: Supermicro

Hardware Availability: Mar-2010

Tested by: Supermicro

Software Availability: Jan-2010

L3 Cache: 12 MB I+D on chip per chip  
Other Cache: None  
Memory: 48 GB (12 x 4 GB DDR3-1333 RDIMM, ECC, CL9)  
Disk Subsystem: 1 x 500 GB SATA II, 7200 RPM  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	1674	195	<b>1675</b>	<b>195</b>	1675	195	12	826	197	824	198	<b>826</b>	<b>197</b>
416.gamess	24	<b>1699</b>	<b>277</b>	1698	277	1729	272	12	839	280	836	281	<b>837</b>	<b>281</b>
433.milc	24	<b>1014</b>	<b>217</b>	1013	218	1014	217	24	1013	217	1013	217	<b>1013</b>	<b>217</b>
434.zeusmp	24	740	295	745	293	<b>741</b>	<b>295</b>	24	740	295	745	293	<b>741</b>	<b>295</b>
435.gromacs	24	643	266	<b>648</b>	<b>264</b>	652	263	24	643	267	636	269	<b>637</b>	<b>269</b>
436.cactusADM	24	932	308	930	308	<b>930</b>	<b>308</b>	24	932	308	930	308	<b>930</b>	<b>308</b>
437.leslie3d	24	1694	133	1692	133	<b>1693</b>	<b>133</b>	12	820	138	818	138	<b>819</b>	<b>138</b>
444.namd	24	765	252	762	253	<b>764</b>	<b>252</b>	24	749	257	<b>744</b>	<b>259</b>	738	261
447.dealII	24	<b>734</b>	<b>374</b>	725	379	736	373	24	727	378	765	359	<b>729</b>	<b>377</b>
450.soplex	24	1320	152	1306	153	<b>1306</b>	<b>153</b>	12	595	168	<b>589</b>	<b>170</b>	589	170
453.povray	24	<b>343</b>	<b>373</b>	339	376	343	373	24	<b>282</b>	<b>453</b>	282	453	283	451
454.calculix	24	609	325	<b>609</b>	<b>325</b>	612	324	24	609	325	<b>609</b>	<b>325</b>	612	324
459.GemsFDTD	24	2009	127	2011	127	<b>2010</b>	<b>127</b>	12	980	130	981	130	<b>980</b>	<b>130</b>
465.tonto	24	<b>904</b>	<b>261</b>	897	263	908	260	24	<b>852</b>	<b>277</b>	855	276	850	278
470.lbm	24	2621	126	<b>2623</b>	<b>126</b>	2624	126	12	<b>1229</b>	<b>134</b>	1229	134	1230	134
481.wrf	24	1119	240	<b>1129</b>	<b>237</b>	1132	237	24	1119	240	<b>1129</b>	<b>237</b>	1132	237
482.sphinx3	24	<b>2115</b>	<b>221</b>	2117	221	2115	221	24	2002	234	2005	233	<b>2004</b>	<b>233</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run

## Platform Notes

Fan speed set to Full Speed in BIOS Setup.  
As tested, the system used a Supermicro  
PWS-865-PQ power supply, 2 SNK-P0038P heatsinks,  
and 2 FAN-0077L cooling fans.



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp\_rate2006 = 239

Motherboard X8DTN+ (Intel Xeon X5650, 2.66 GHz)

SPECfp\_rate\_base2006 = 230

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Mar-2010  
Hardware Availability: Mar-2010  
Software Availability: Jan-2010

## General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp\_rate2006 = 239

Motherboard X8DTN+ (Intel Xeon X5650, 2.66 GHz)

SPECfp\_rate\_base2006 = 230

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Mar-2010  
Hardware Availability: Mar-2010  
Software Availability: Jan-2010

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:  
-xSSE4.2 -ipo -O3 -no-prec-div -static

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m64  
  
482.sphinx3: icc -m32  
  
C++ benchmarks (except as noted below):  
icpc -m64  
  
450.soplex: icpc -m32  
  
Fortran benchmarks:  
ifort -m64  
  
Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.deallI: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SPECfp\_rate2006 = 239

Motherboard X8DTN+ (Intel Xeon X5650, 2.66 GHz)

SPECfp\_rate\_base2006 = 230

CPU2006 license: 001176

Test date: Mar-2010

Test sponsor: Supermicro

Hardware Availability: Mar-2010

Tested by: Supermicro

Software Availability: Jan-2010

## Peak Optimization Flags (Continued)

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -opt-prefetch

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3 -ansi-alias -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

### C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -auto -inline-calloc -opt-malloc-options=3

### Benchmarks using both Fortran and C:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp\_rate2006 = 239

Motherboard X8DTN+ (Intel Xeon X5650, 2.66 GHz)

SPECfp\_rate\_base2006 = 230

CPU2006 license: 001176

Test date: Mar-2010

Test sponsor: Supermicro

Hardware Availability: Mar-2010

Tested by: Supermicro

Software Availability: Jan-2010

## Peak Optimization Flags (Continued)

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 08:04:14 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 4 May 2010.