



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Oracle Corporation

SPECfp®\_rate2006 = 155

Sun Netra X4270 (Intel Xeon L5518 2.13GHz)

SPECfp\_rate\_base2006 = 153

CPU2006 license: 6


Test sponsor: Oracle Corporation

Tested by: Oracle Corporation

Test date: Apr-2010

Hardware Availability: May-2010

Software Availability: Dec-2009

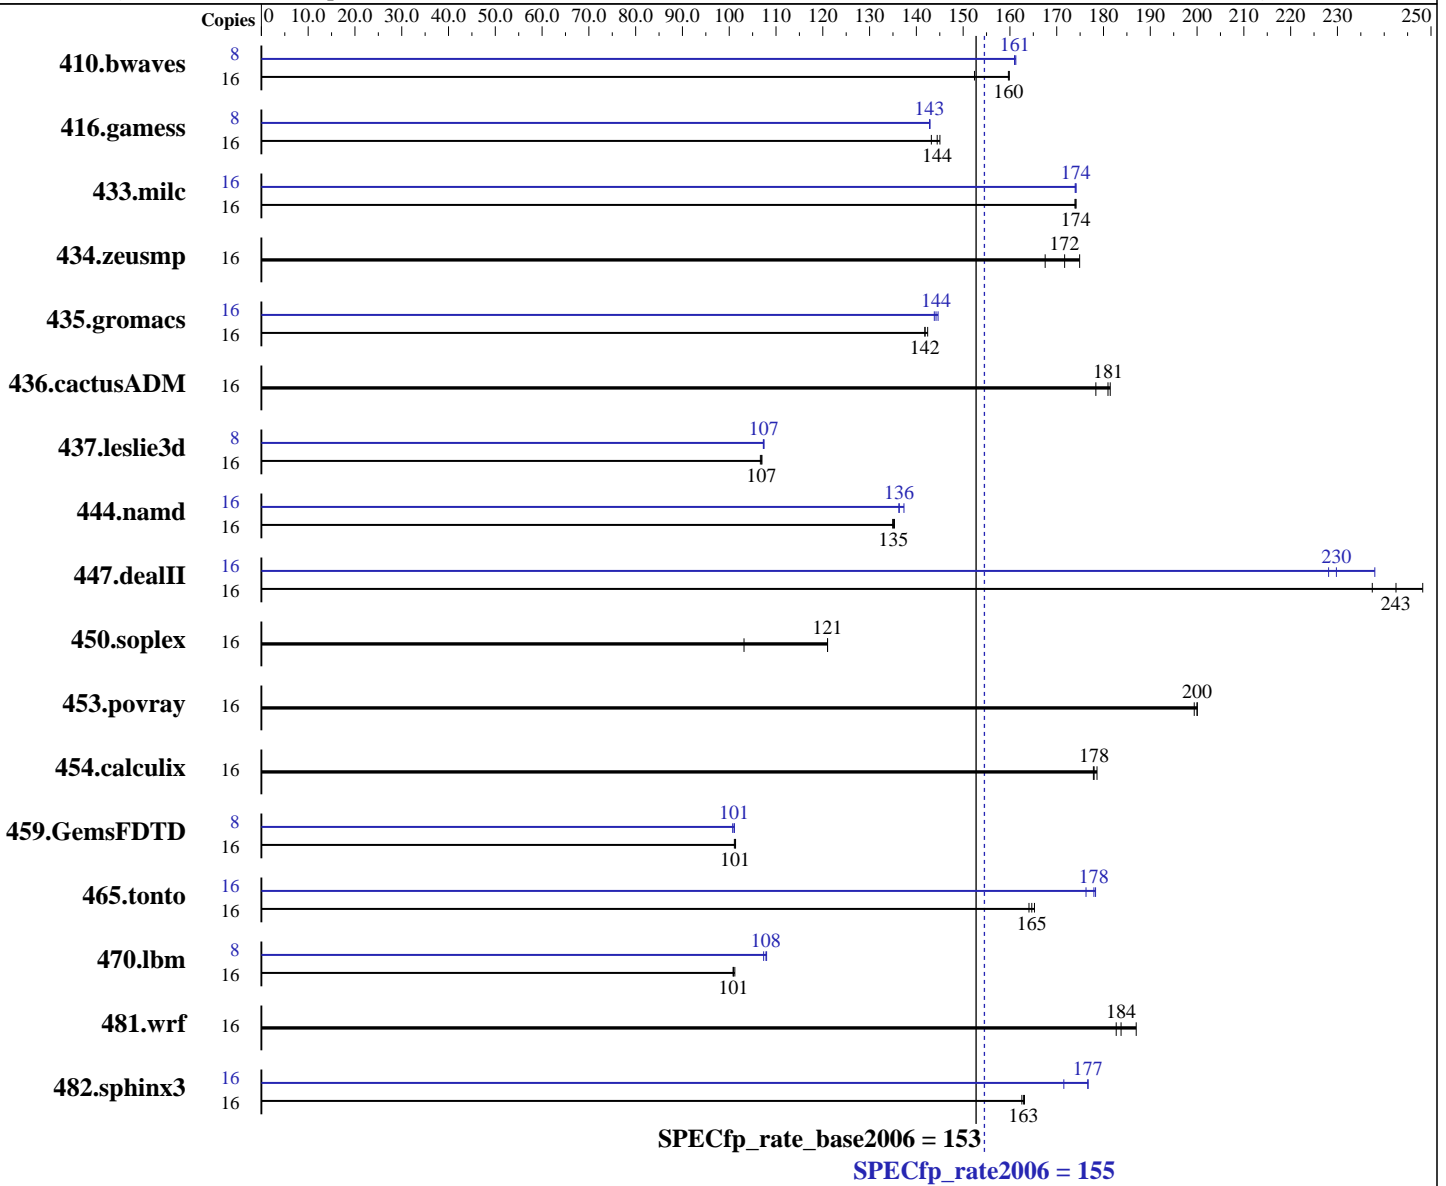

### Hardware

CPU Name: Intel Xeon L5518  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.37 GHz  
 CPU MHz: 2133  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 or 2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Oracle Enterprise Linux Server release 5.4  
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1  
 Build 20091130 Package ID: L\_cproc\_p\_11.1.064, L\_cprof\_p\_11.1.064  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Oracle Corporation

SPECfp\_rate2006 = **155**

Sun Netra X4270 (Intel Xeon L5518 2.13GHz)

SPECfp\_rate\_base2006 = **153**

CPU2006 license: 6

Test date: Apr-2010

Test sponsor: Oracle Corporation

Hardware Availability: May-2010

Tested by: Oracle Corporation

Software Availability: Dec-2009

L3 Cache: 8 MB I+D on chip per chip  
Other Cache: None  
Memory: 24 GB (6x4 GB DDR3-1333, 2 Rank, CL9 running at 1066 MHz)  
Disk Subsystem: 1 x 300 GB, SAS, 10000 RPM  
Other Hardware: None

Peak Pointers: 32/64-bit  
Other Software: Binutils 2.18.50.0.7.20080502

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	1427	152	1360	160	<b>1362</b>	<b>160</b>	8	<b>675</b>	<b>161</b>	675	161	674	161
416.gamess	16	2188	143	2160	145	<b>2169</b>	<b>144</b>	8	1096	143	1097	143	<b>1097</b>	<b>143</b>
433.milc	16	845	174	<b>844</b>	<b>174</b>	844	174	16	844	174	844	174	<b>844</b>	<b>174</b>
434.zeusmp	16	869	168	<b>848</b>	<b>172</b>	832	175	16	869	168	<b>848</b>	<b>172</b>	832	175
435.gromacs	16	802	142	805	142	<b>805</b>	<b>142</b>	16	<b>792</b>	<b>144</b>	790	145	794	144
436.cactusADM	16	1072	178	<b>1057</b>	<b>181</b>	1054	181	16	1072	178	<b>1057</b>	<b>181</b>	1054	181
437.leslie3d	16	1410	107	1406	107	<b>1407</b>	<b>107</b>	8	701	107	700	107	<b>700</b>	<b>107</b>
444.namd	16	948	135	951	135	<b>950</b>	<b>135</b>	16	942	136	<b>941</b>	<b>136</b>	934	137
447.dealII	16	<b>755</b>	<b>243</b>	737	248	771	237	16	802	228	<b>797</b>	<b>230</b>	769	238
450.soplex	16	1294	103	1103	121	<b>1103</b>	<b>121</b>	16	1294	103	1103	121	<b>1103</b>	<b>121</b>
453.povray	16	426	200	427	199	<b>426</b>	<b>200</b>	16	426	200	427	199	<b>426</b>	<b>200</b>
454.calculix	16	739	179	<b>742</b>	<b>178</b>	742	178	16	739	179	<b>742</b>	<b>178</b>	742	178
459.GemsFDTD	16	1679	101	1675	101	<b>1676</b>	<b>101</b>	8	840	101	843	101	<b>840</b>	<b>101</b>
465.tonto	16	953	165	<b>956</b>	<b>165</b>	960	164	16	883	178	<b>885</b>	<b>178</b>	893	176
470.lbm	16	2172	101	<b>2179</b>	<b>101</b>	2180	101	8	1018	108	<b>1019</b>	<b>108</b>	1024	107
481.wrf	16	<b>973</b>	<b>184</b>	956	187	978	183	16	<b>973</b>	<b>184</b>	956	187	978	183
482.sphinx3	16	1912	163	1918	163	<b>1914</b>	<b>163</b>	16	1818	172	<b>1766</b>	<b>177</b>	1765	177

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp\_rate2006 = 155

Sun Netra X4270 (Intel Xeon L5518 2.13GHz)

SPECfp\_rate\_base2006 = 153

CPU2006 license: 6

Test date: Apr-2010

Test sponsor: Oracle Corporation

Hardware Availability: May-2010

Tested by: Oracle Corporation

Software Availability: Dec-2009

## Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp\_rate2006 = 155

Sun Netra X4270 (Intel Xeon L5518 2.13GHz)

SPECfp\_rate\_base2006 = 153

CPU2006 license: 6

Test date: Apr-2010

Test sponsor: Oracle Corporation

Hardware Availability: May-2010

Tested by: Oracle Corporation

Software Availability: Dec-2009

## Peak Compiler Invocation (Continued)

482.sphinx3: `icc -m32`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`  
 416.gamess: `-DSPEC_CPU_LP64`  
 433.milc: `-DSPEC_CPU_LP64`  
 434.zeusmp: `-DSPEC_CPU_LP64`  
 435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`  
 436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`  
 437.leslie3d: `-DSPEC_CPU_LP64`  
 444.namd: `-DSPEC_CPU_LP64`  
 447.deallI: `-DSPEC_CPU_LP64`  
 450.soplex: `-DSPEC_CPU_LP64`  
 453.povray: `-DSPEC_CPU_LP64`  
 454.calculix: `-DSPEC_CPU_LP64 -nofor_main`  
 459.GemsFDTD: `-DSPEC_CPU_LP64`  
 465.tonto: `-DSPEC_CPU_LP64`  
 470.lbm: `-DSPEC_CPU_LP64`  
 481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

## Peak Optimization Flags

C benchmarks:

433.milc: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -fno-alias -opt-prefetch`

470.lbm: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -opt-malloc-options=3 -ansi-alias -auto-ilp32`

482.sphinx3: `-xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2`

C++ benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp\_rate2006 = 155

Sun Netra X4270 (Intel Xeon L5518 2.13GHz)

SPECfp\_rate\_base2006 = 153

CPU2006 license: 6

Test sponsor: Oracle Corporation

Tested by: Oracle Corporation

Test date: Apr-2010

Hardware Availability: May-2010

Software Availability: Dec-2009

## Peak Optimization Flags (Continued)

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias -scalar-rep-

450.soplex: basepeak = yes

453.povray: basepeak = yes

### Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -auto -inline-calloc -opt-malloc-options=3

### Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp\_rate2006 = 155

Sun Netra X4270 (Intel Xeon L5518 2.13GHz)

SPECfp\_rate\_base2006 = 153

CPU2006 license: 6

Test sponsor: Oracle Corporation

Tested by: Oracle Corporation

Test date: Apr-2010

Hardware Availability: May-2010

Software Availability: Dec-2009

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 07:13:43 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 11 May 2010.