



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp[®]_rate2006 = 568

Cisco UCS C460 M1 (Intel Xeon X7560, 2.27 GHz)

SPECfp_rate_base2006 = 549

CPU2006 license: 9019


Test date: Apr-2010

Test sponsor: Cisco Systems

Hardware Availability: May-2010

Tested by: Cisco Systems

Software Availability: Jan-2010

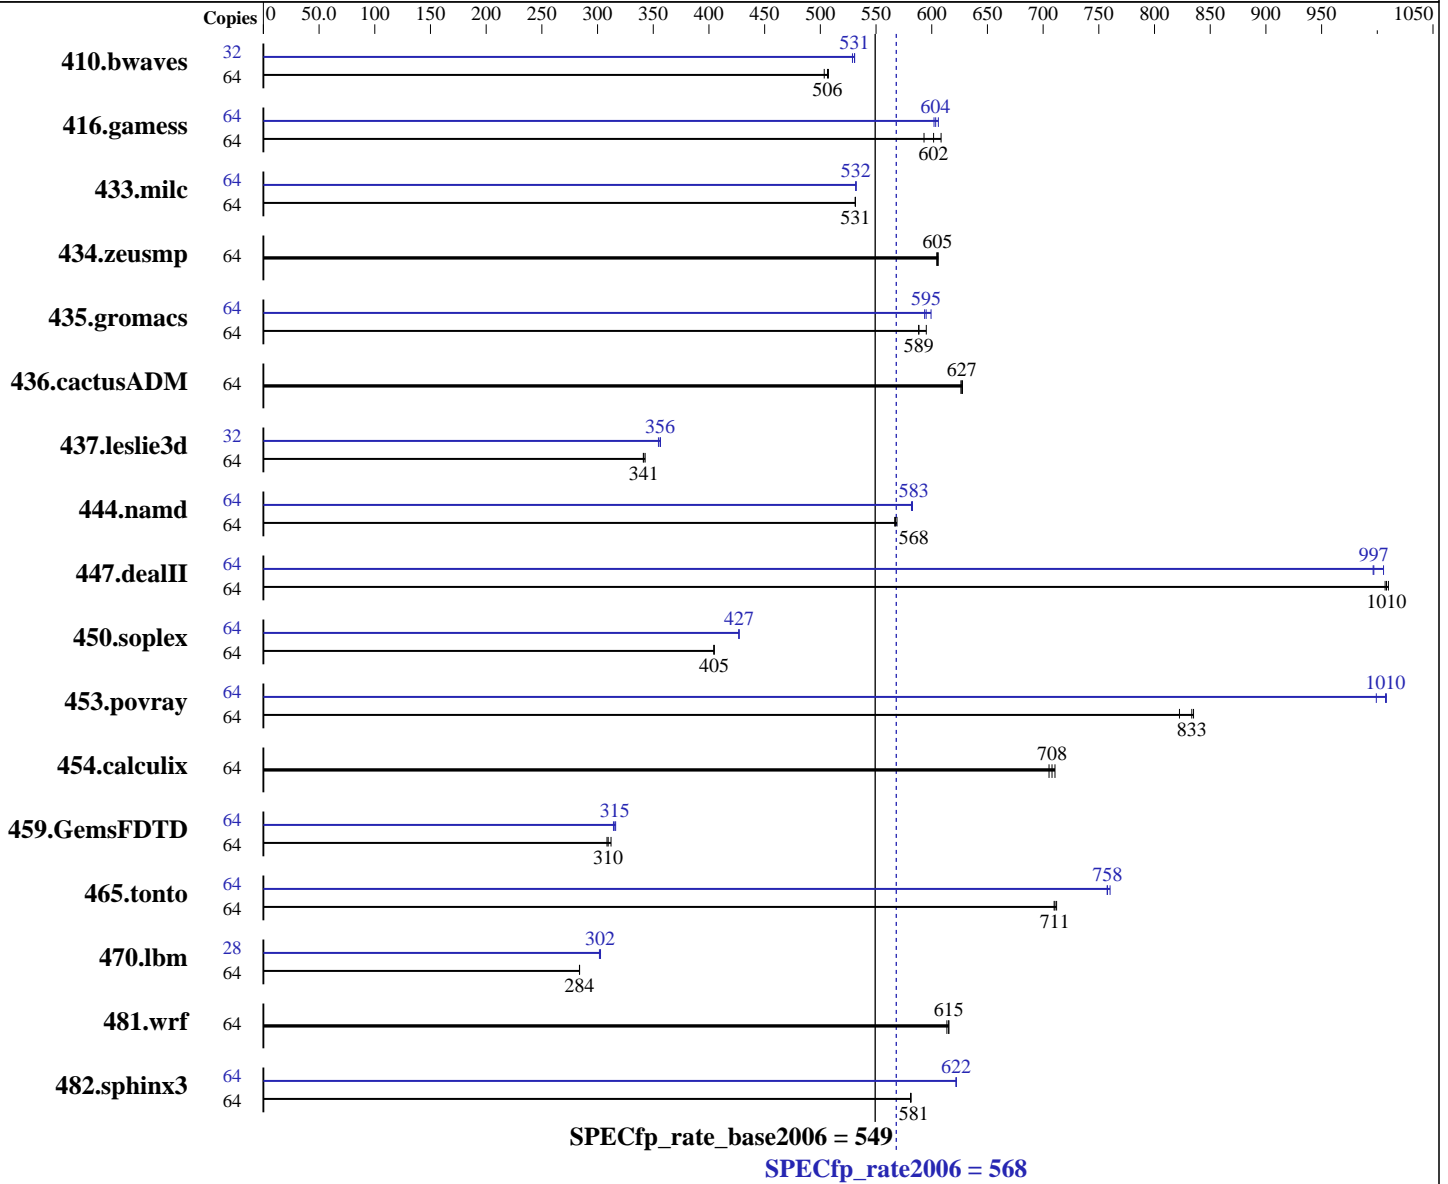

Hardware

CPU Name: Intel Xeon X7560
 CPU Characteristics: Intel Turbo Boost Technology up to 2.67 GHz
 CPU MHz: 2266
 FPU: Integrated
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2,3,4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SuSe Linux Enterprise Server 11 (x86_64), Kernel 2.6.27-19-5-default
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp_rate2006 = 568

Cisco UCS C460 M1 (Intel Xeon X7560, 2.27 GHz)

SPECfp_rate_base2006 = 549

CPU2006 license: 9019

Test date: Apr-2010

Test sponsor: Cisco Systems

Hardware Availability: May-2010

Tested by: Cisco Systems

Software Availability: Jan-2010

L3 Cache: 24 MB I+D on chip per chip
 Other Cache: None
 Memory: 512 GB (64x8GB, PC3-8500R, CL9, Quad Rank, ECC)
 Disk Subsystem: 146 GB SAS, 15K RPM
 Other Hardware: None

Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	64	1715	507	1727	504	<u>1717</u>	<u>506</u>	32	822	529	819	531	<u>820</u>	<u>531</u>
416.gamess	64	2113	593	2060	608	<u>2083</u>	<u>602</u>	64	2068	606	2081	602	<u>2076</u>	<u>604</u>
433.milc	64	1106	531	<u>1106</u>	<u>531</u>	1105	532	64	1104	532	<u>1104</u>	<u>532</u>	1105	532
434.zeusmp	64	<u>962</u>	<u>605</u>	963	604	961	606	64	<u>962</u>	<u>605</u>	963	604	961	606
435.gromacs	64	768	595	777	588	<u>776</u>	<u>589</u>	64	770	594	762	599	<u>768</u>	<u>595</u>
436.cactusADM	64	<u>1220</u>	<u>627</u>	1219	628	1221	626	64	<u>1220</u>	<u>627</u>	1219	628	1221	626
437.leslie3d	64	<u>1762</u>	<u>341</u>	1755	343	1764	341	32	848	355	844	357	<u>845</u>	<u>356</u>
444.namd	64	<u>904</u>	<u>568</u>	906	567	902	569	64	<u>881</u>	<u>583</u>	882	582	881	583
447.dealII	64	727	1010	<u>726</u>	<u>1010</u>	725	1010	64	728	1010	<u>734</u>	<u>997</u>	735	996
450.soplex	64	1319	405	<u>1319</u>	<u>405</u>	1320	404	64	1250	427	1250	427	<u>1250</u>	<u>427</u>
453.povray	64	408	835	414	822	<u>409</u>	<u>833</u>	64	<u>338</u>	<u>1010</u>	338	1010	341	999
454.calculix	64	749	705	743	711	<u>746</u>	<u>708</u>	64	749	705	743	711	<u>746</u>	<u>708</u>
459.GemsFDTD	64	2201	308	<u>2194</u>	<u>310</u>	2176	312	64	2161	314	2147	316	<u>2152</u>	<u>315</u>
465.tonto	64	884	712	887	710	<u>886</u>	<u>711</u>	64	<u>831</u>	<u>758</u>	829	760	831	757
470.lbm	64	3099	284	<u>3098</u>	<u>284</u>	3098	284	28	1275	302	<u>1273</u>	<u>302</u>	1271	303
481.wrf	64	1162	615	1165	614	<u>1162</u>	<u>615</u>	64	1162	615	1165	614	<u>1162</u>	<u>615</u>
482.sphinx3	64	2145	581	2147	581	<u>2146</u>	<u>581</u>	64	2005	622	<u>2005</u>	<u>622</u>	2006	622

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

Binaries compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

ulimit -s unlimited was used to set the stacksize to unlimited prior to run



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp_rate2006 = 568

Cisco UCS C460 M1 (Intel Xeon X7560, 2.27 GHz)

SPECfp_rate_base2006 = 549

CPU2006 license: 9019

Test date: Apr-2010

Test sponsor: Cisco Systems

Hardware Availability: May-2010

Tested by: Cisco Systems

Software Availability: Jan-2010

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.lelie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp_rate2006 = 568

Cisco UCS C460 M1 (Intel Xeon X7560, 2.27 GHz)

SPECfp_rate_base2006 = 549

CPU2006 license: 9019

Test date: Apr-2010

Test sponsor: Cisco Systems

Hardware Availability: May-2010

Tested by: Cisco Systems

Software Availability: Jan-2010

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -fno-alias -opt-prefetch

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -opt-malloc-options=3 -ansi-alias -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp_rate2006 = 568

Cisco UCS C460 M1 (Intel Xeon X7560, 2.27 GHz)

SPECfp_rate_base2006 = 549

CPU2006 license: 9019

Test date: Apr-2010

Test sponsor: Cisco Systems

Hardware Availability: May-2010

Tested by: Cisco Systems

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp_rate2006 = 568

Cisco UCS C460 M1 (Intel Xeon X7560, 2.27 GHz)

SPECfp_rate_base2006 = 549

CPU2006 license: 9019

Test date: Apr-2010

Test sponsor: Cisco Systems

Hardware Availability: May-2010

Tested by: Cisco Systems

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 09:25:23 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 25 May 2010.