



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Motherboard X8DT3-LN4F (Intel Xeon L5609, 1.86 GHz)

SPECfp<sup>®</sup>\_rate2006 = 119

SPECfp\_rate\_base2006 = 116

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: May-2010

Hardware Availability: Mar-2010

Software Availability: Jan-2010

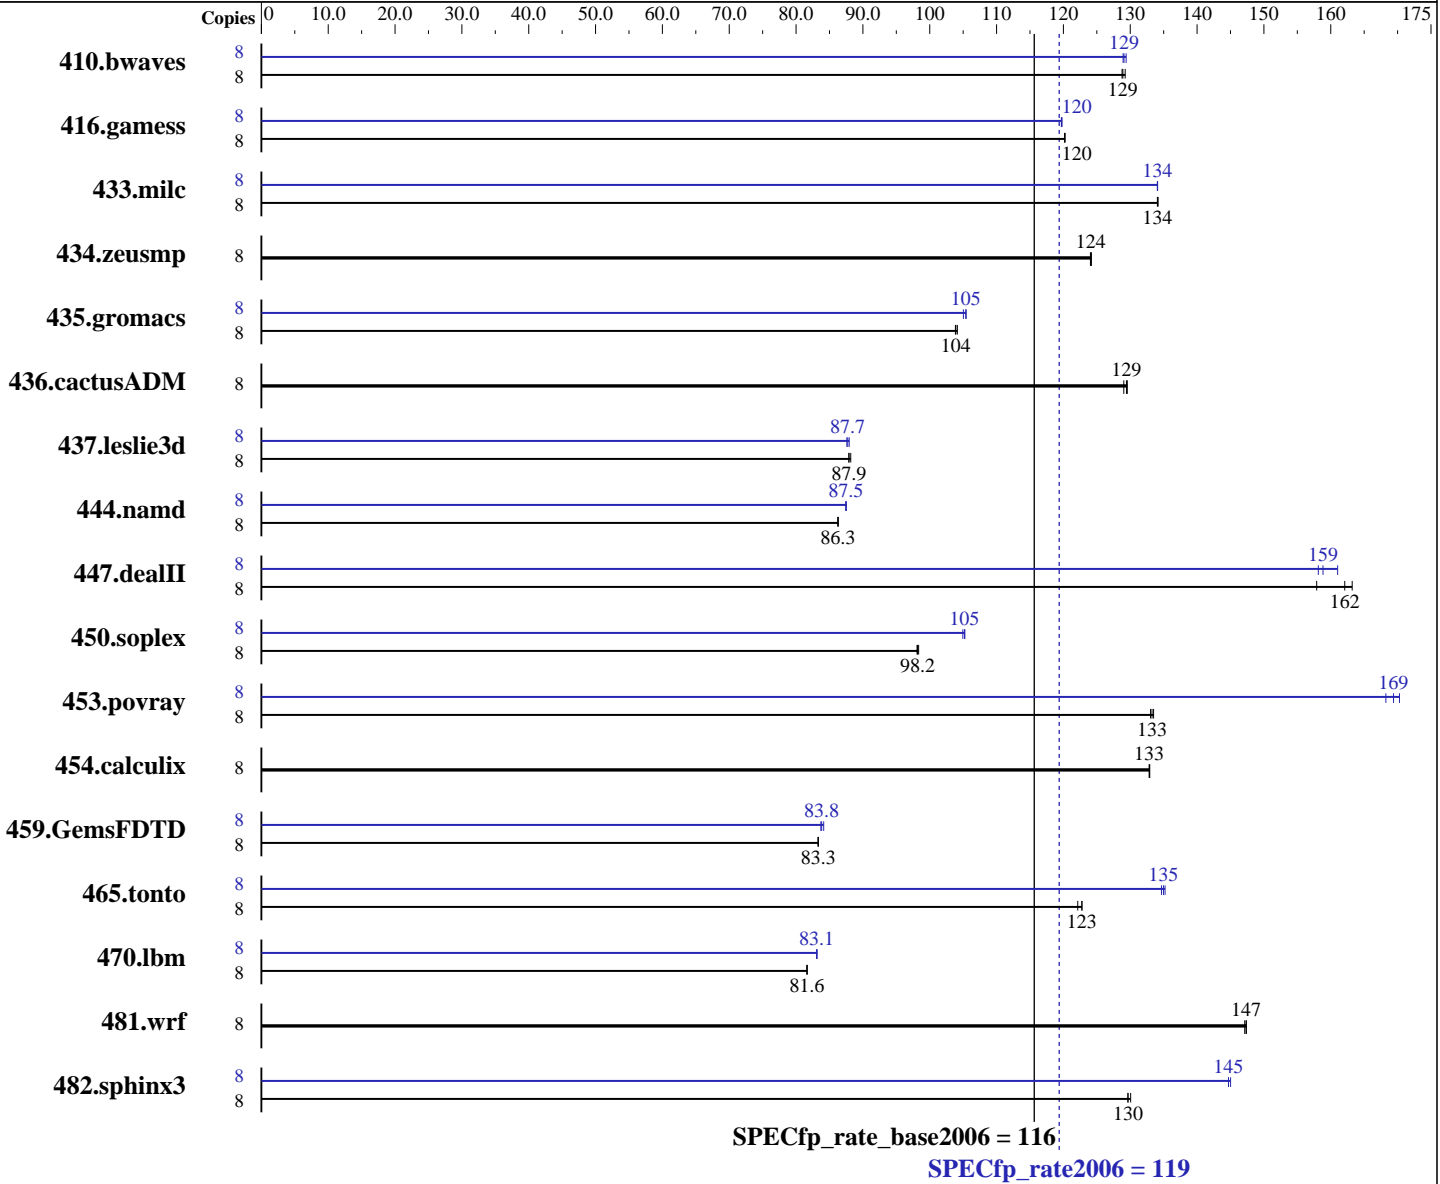

### Hardware

CPU Name: Intel Xeon L5609  
 CPU Characteristics:  
 CPU MHz: 1867  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64)  
 Kernel 2.6.27.19-5-default  
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1  
 Build 20091130 Package ID: l\_cproc\_p\_11.1.064, l\_cprof\_p\_11.1.064  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Motherboard X8DT3-LN4F (Intel Xeon L5609, 1.86 GHz)

SPECfp\_rate2006 = 119

SPECfp\_rate\_base2006 = 116

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: May-2010

Hardware Availability: Mar-2010

Software Availability: Jan-2010

L3 Cache: 12 MB I+D on chip per chip  
Other Cache: None  
Memory: 48 GB (12 x 4 GB DDR3-1066 RDIMM, ECC, CL7)  
Disk Subsystem: 1 x 500 GB SATA II, 7200 RPM  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	844	129	<u>843</u>	<u>129</u>	841	129	8	843	129	<u>842</u>	<u>129</u>	840	129
416.gamess	8	1303	120	<u>1303</u>	<u>120</u>	1303	120	8	1309	120	1308	120	<u>1308</u>	<u>120</u>
433.milc	8	548	134	<u>548</u>	<u>134</u>	547	134	8	548	134	548	134	<u>548</u>	<u>134</u>
434.zeusmp	8	586	124	587	124	<u>587</u>	<u>124</u>	8	586	124	587	124	<u>587</u>	<u>124</u>
435.gromacs	8	549	104	550	104	<u>550</u>	<u>104</u>	8	<u>542</u>	<u>105</u>	544	105	542	105
436.cactusADM	8	738	130	<u>739</u>	<u>129</u>	741	129	8	738	130	<u>739</u>	<u>129</u>	741	129
437.leslie3d	8	<u>855</u>	<u>87.9</u>	853	88.2	856	87.9	8	858	87.6	<u>857</u>	<u>87.7</u>	855	88.0
444.namd	8	744	86.3	743	86.3	<u>744</u>	<u>86.3</u>	8	733	87.5	<u>733</u>	<u>87.5</u>	734	87.4
447.dealII	8	<u>565</u>	<u>162</u>	561	163	580	158	8	568	161	<u>576</u>	<u>159</u>	579	158
450.soplex	8	678	98.3	680	98.1	<u>680</u>	<u>98.2</u>	8	634	105	<u>634</u>	<u>105</u>	636	105
453.povray	8	<u>319</u>	<u>133</u>	319	133	320	133	8	253	168	<u>251</u>	<u>169</u>	250	170
454.calculix	8	497	133	<u>497</u>	<u>133</u>	497	133	8	497	133	<u>497</u>	<u>133</u>	497	133
459.GemsFDTD	8	1019	83.3	<u>1019</u>	<u>83.3</u>	1019	83.3	8	1009	84.1	<u>1013</u>	<u>83.8</u>	1014	83.7
465.tonto	8	641	123	<u>641</u>	<u>123</u>	644	122	8	585	135	582	135	<u>583</u>	<u>135</u>
470.lbm	8	1346	81.6	<u>1346</u>	<u>81.6</u>	1346	81.7	8	<u>1323</u>	<u>83.1</u>	1323	83.1	1322	83.2
481.wrf	8	607	147	606	147	<u>607</u>	<u>147</u>	8	607	147	606	147	<u>607</u>	<u>147</u>
482.sphinx3	8	1199	130	<u>1202</u>	<u>130</u>	1203	130	8	1078	145	1075	145	<u>1078</u>	<u>145</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run

## Platform Notes

Fan speed set to Full Speed in BIOS Setup.  
As tested, the system used a Supermicro  
PWS-865-PQ power supply, 2 SNK-P0037P heatsinks,  
along with 2 JMC 1238-12FB and

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Motherboard X8DT3-LN4F (Intel Xeon L5609, 1.86 GHz)

SPECfp\_rate2006 = 119

SPECfp\_rate\_base2006 = 116

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: May-2010  
Hardware Availability: Mar-2010  
Software Availability: Jan-2010

### Platform Notes (Continued)

- 1 SAN ACE 9G0812P1F03 and
- 1 SAN ACE 9G0812P1G09 cooling fans.

### General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

### Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

### Base Portability Flags

- 410.bwaves: -DSPEC\_CPU\_LP64
- 416.gamess: -DSPEC\_CPU\_LP64
- 433.milc: -DSPEC\_CPU\_LP64
- 434.zeusmp: -DSPEC\_CPU\_LP64
- 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main
- 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main
- 437.leslie3d: -DSPEC\_CPU\_LP64
- 444.namd: -DSPEC\_CPU\_LP64
- 447.dealII: -DSPEC\_CPU\_LP64
- 450.soplex: -DSPEC\_CPU\_LP64
- 453.povray: -DSPEC\_CPU\_LP64
- 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main
- 459.GemsFDTD: -DSPEC\_CPU\_LP64
- 465.tonto: -DSPEC\_CPU\_LP64
- 470.lbm: -DSPEC\_CPU\_LP64
- 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX
- 482.sphinx3: -DSPEC\_CPU\_LP64

### Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Motherboard X8DT3-LN4F (Intel Xeon L5609, 1.86 GHz)

SPECfp\_rate2006 = 119

SPECfp\_rate\_base2006 = 116

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: May-2010  
Hardware Availability: Mar-2010  
Software Availability: Jan-2010

## Base Optimization Flags (Continued)

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:  
-xSSE4.2 -ipo -O3 -no-prec-div -static

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):  
icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Motherboard X8DT3-LN4F (Intel Xeon L5609, 1.86 GHz)

SPECfp\_rate2006 = 119

SPECfp\_rate\_base2006 = 116

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: May-2010

Hardware Availability: Mar-2010

Software Availability: Jan-2010

## Peak Optimization Flags

### C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -opt-prefetch

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3 -ansi-alias -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

### C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -auto -inline-calloc -opt-malloc-options=3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Motherboard X8DT3-LN4F (Intel Xeon L5609, 1.86 GHz)

SPECfp\_rate2006 = 119

SPECfp\_rate\_base2006 = 116

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: May-2010

Hardware Availability: Mar-2010

Software Availability: Jan-2010

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 09:11:10 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 9 June 2010.