



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint[®]_rate2006 = 388

PowerEdge R815 (AMD Opteron 6174, 2.20 GHz)

SPECint_rate_base2006 = 306

CPU2006 license: 55


Test date: Apr-2010

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Feb-2010

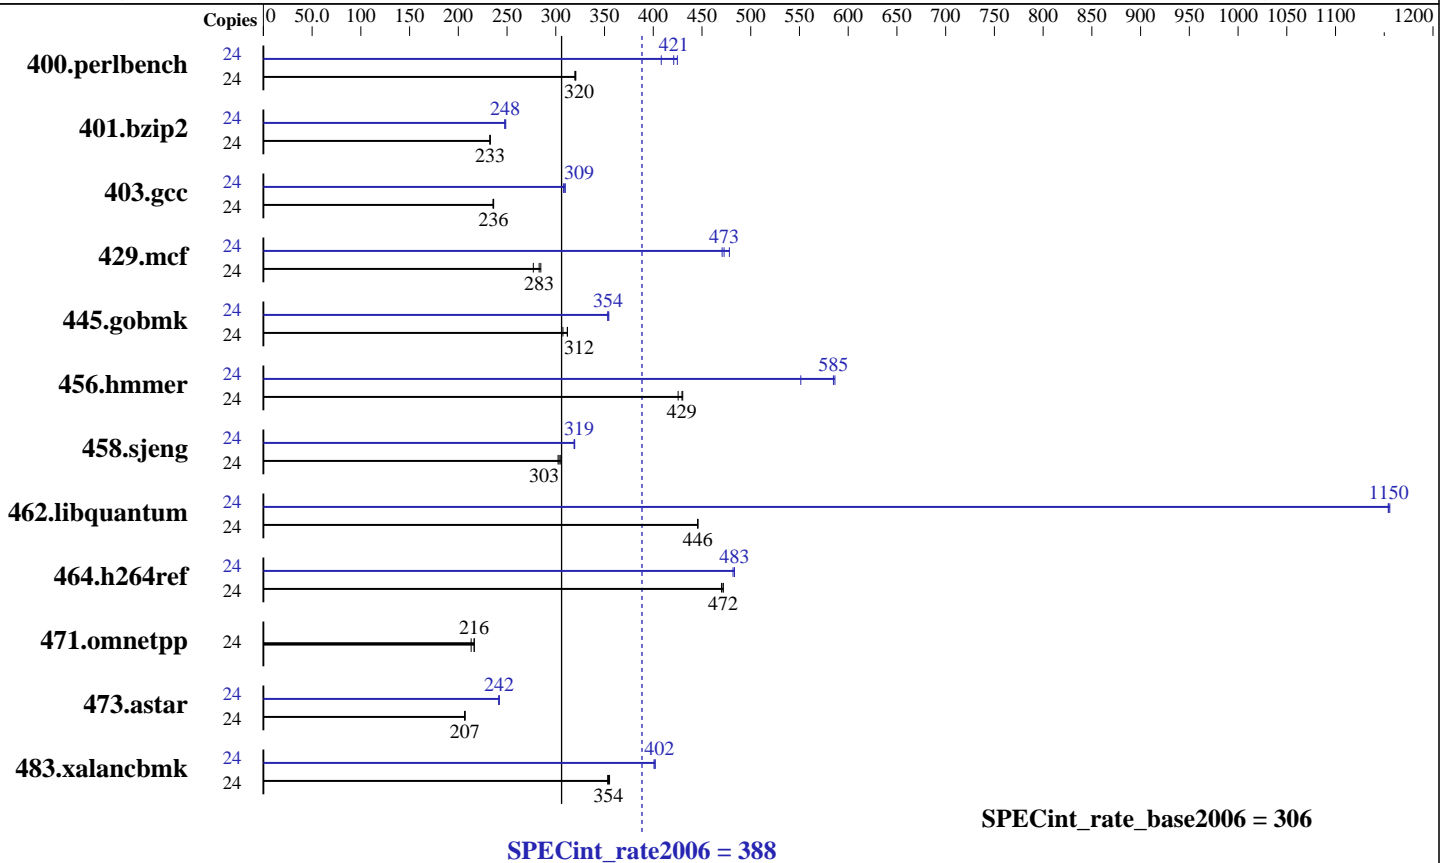

Hardware

CPU Name: AMD Opteron 6174
 CPU Characteristics:
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip
 CPU(s) orderable: 2,4 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core
 L3 Cache: 12 MB I+D on chip per chip, 6 MB shared / 6 cores
 Other Cache: None
 Memory: 64 GB (16 x 4 GB DDR3-1333 DR RDIMM, CL9, ECC)
 Disk Subsystem: 1 x 148 GB 10000 RPM SAS
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-smp
 Compiler: x86 Open64 4.2.3 Compiler Suite (from AMD)
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap 8.1 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 388

PowerEdge R815 (AMD Opteron 6174, 2.20 GHz)

SPECint_rate_base2006 = 306

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Apr-2010
Hardware Availability: Mar-2010
Software Availability: Feb-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	734	320	731	321	<u>732</u>	<u>320</u>	24	574	408	552	425	<u>557</u>	<u>421</u>
401.bzip2	24	995	233	<u>995</u>	<u>233</u>	997	232	24	935	248	<u>934</u>	<u>248</u>	931	249
403.gcc	24	818	236	818	236	820	236	24	625	309	627	308	624	310
429.mcf	24	769	285	790	277	<u>774</u>	<u>283</u>	24	458	478	465	471	<u>463</u>	<u>473</u>
445.gobmk	24	807	312	819	307	807	312	24	710	354	<u>712</u>	354	713	353
456.hammer	24	<u>521</u>	<u>429</u>	526	426	520	430	24	406	551	382	586	<u>383</u>	<u>585</u>
458.sjeng	24	961	302	952	305	<u>957</u>	<u>303</u>	24	<u>910</u>	<u>319</u>	911	319	909	319
462.libquantum	24	1116	446	<u>1116</u>	<u>446</u>	1115	446	24	431	1150	<u>431</u>	<u>1150</u>	430	1160
464.h264ref	24	1130	470	<u>1126</u>	<u>472</u>	1126	472	24	1102	482	1099	483	<u>1099</u>	<u>483</u>
471.omnetpp	24	693	216	704	213	<u>694</u>	<u>216</u>	24	693	216	704	213	<u>694</u>	<u>216</u>
473.astar	24	815	207	816	207	814	207	24	698	241	<u>697</u>	<u>242</u>	696	242
483.xalancbmk	24	<u>468</u>	<u>354</u>	469	353	466	355	24	413	401	412	402	<u>412</u>	<u>402</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=10800 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "450"

LD_LIBRARY_PATH = "/root/cpu2006-1.1/amd1002mc-rate-revA-libs/64:/root/cpu2006-1.1/amd1002mc-rate-revA-libs/32"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Binaries were compiled on SLES10 SP2 with binutils 2.18



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 388

PowerEdge R815 (AMD Opteron 6174, 2.20 GHz)

SPECint_rate_base2006 = 306

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Apr-2010
Hardware Availability: Mar-2010
Software Availability: Feb-2010

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-march=barcelona -mso -Ofast -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m

C++ benchmarks:
-march=barcelona -mso -Ofast -m32 -INLINE:aggressive=on
-CG:cmp_peep=on -L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 388

PowerEdge R815 (AMD Opteron 6174, 2.20 GHz)

SPECint_rate_base2006 = 306

CPU2006 license: 55

Test date: Apr-2010

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Feb-2010

Peak Portability Flags (Continued)

456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -mso -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
 -OPT:unroll_times_max=8 -OPT:unroll_size=256
 -OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
 -CG:local_sched_alg=1 -CG:unroll_fb_req=on
 -HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -mso -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -OPT:alias=disjoint
 -OPT:goto=off -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -mso -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
 -LNO:prefetch_ahead=10 -CG:cmp_peep=on -m32
 -HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200

429.mcf: -march=barcelona -mso -O3 -ipa -INLINE:aggressive=on
 -CG:gcm=off -GRA:prioritize_by_density=on -m32
 -HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -mso -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
 -OPT:unroll_times_max=8 -OPT:unroll_size=256
 -OPT:unroll_level=2 -OPT:keep_ext=on -ipa -IPA:plimit=750
 -IPA:min_hotness=300 -IPA:pu_reorder=1 -LNO:prefetch=1
 -LNO:ignore_feedback=off -CG:p2align=on
 -CG:unroll_fb_req=on -HP:bdt=2m:heap=2m

456.hmmer: -march=barcelona -mso -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=0
 -OPT:alias=disjoint -OPT:unroll_times_max=8
 -OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
 -CG:local_sched_alg=1 -CG:cflow=0
 -CG:push_pop_int_saved_regs=off -CG:cmp_peep=on
 -HP:bdt=2m:heap=2m

458.sjeng: -march=barcelona -mso -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -ipa -LNO:ignore_feedback=off
 -LNO:full_unroll=10 -LNO:fusion=0 -LNO:fission=2

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 388

PowerEdge R815 (AMD Opteron 6174, 2.20 GHz)

SPECint_rate_base2006 = 306

CPU2006 license: 55

Test date: Apr-2010

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Feb-2010

Peak Optimization Flags (Continued)

458.sjeng (continued):

-IPA:pu_reorder=2 -CG:ptr_load_use=0
-OPT:unroll_times_max=8 -INLINE:aggressive=on

462.libquantum: -march=barcelona -mso -Ofast -LNO:pf2=0 -CG:gcm=off
-CG:use_prefetchnta=on -CG:cmp_peep=on -WOPT:aggstr=0
-HP:bdt=2m:heap=2m -OPT:alias=disjoint
-INLINE:aggressive=on -IPA:space=1000 -IPA:plimit=20000

464.h264ref: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -IPA:plimit=20000
-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
-CG:push_pop_int_saved_regs=off

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -TENV:frame_pointer=off
-WOPT:if_conv=0 -GRA:optimize_boundary=on
-OPT:alias=disjoint -INLINE:aggressive=on
-IPA:small_pu=3000 -IPA:plimit=3000 -m32
-HP:bdt=2m:heap=2m

483.xalancbmk: -march=barcelona -mso -Ofast -INLINE:aggressive=on -m32
-CG:cmp_peep=on -GRA:unspill=on -TENV:frame_pointer=off
-fno-emit-exceptions
-L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.3-flags-revA.html>

<http://www.spec.org/cpu2006/flags/amd-platform-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.3-flags-revA.xml>

<http://www.spec.org/cpu2006/flags/amd-platform-revA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 09:05:02 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 9 June 2010.