



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R440 F2  
(Intel Xeon E5520, 2.27 GHz)

SPECfp®2006 = 34.7

SPECfp\_base2006 = 32.4

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: May-2010

Hardware Availability: Jan-2010

Software Availability: Dec-2009

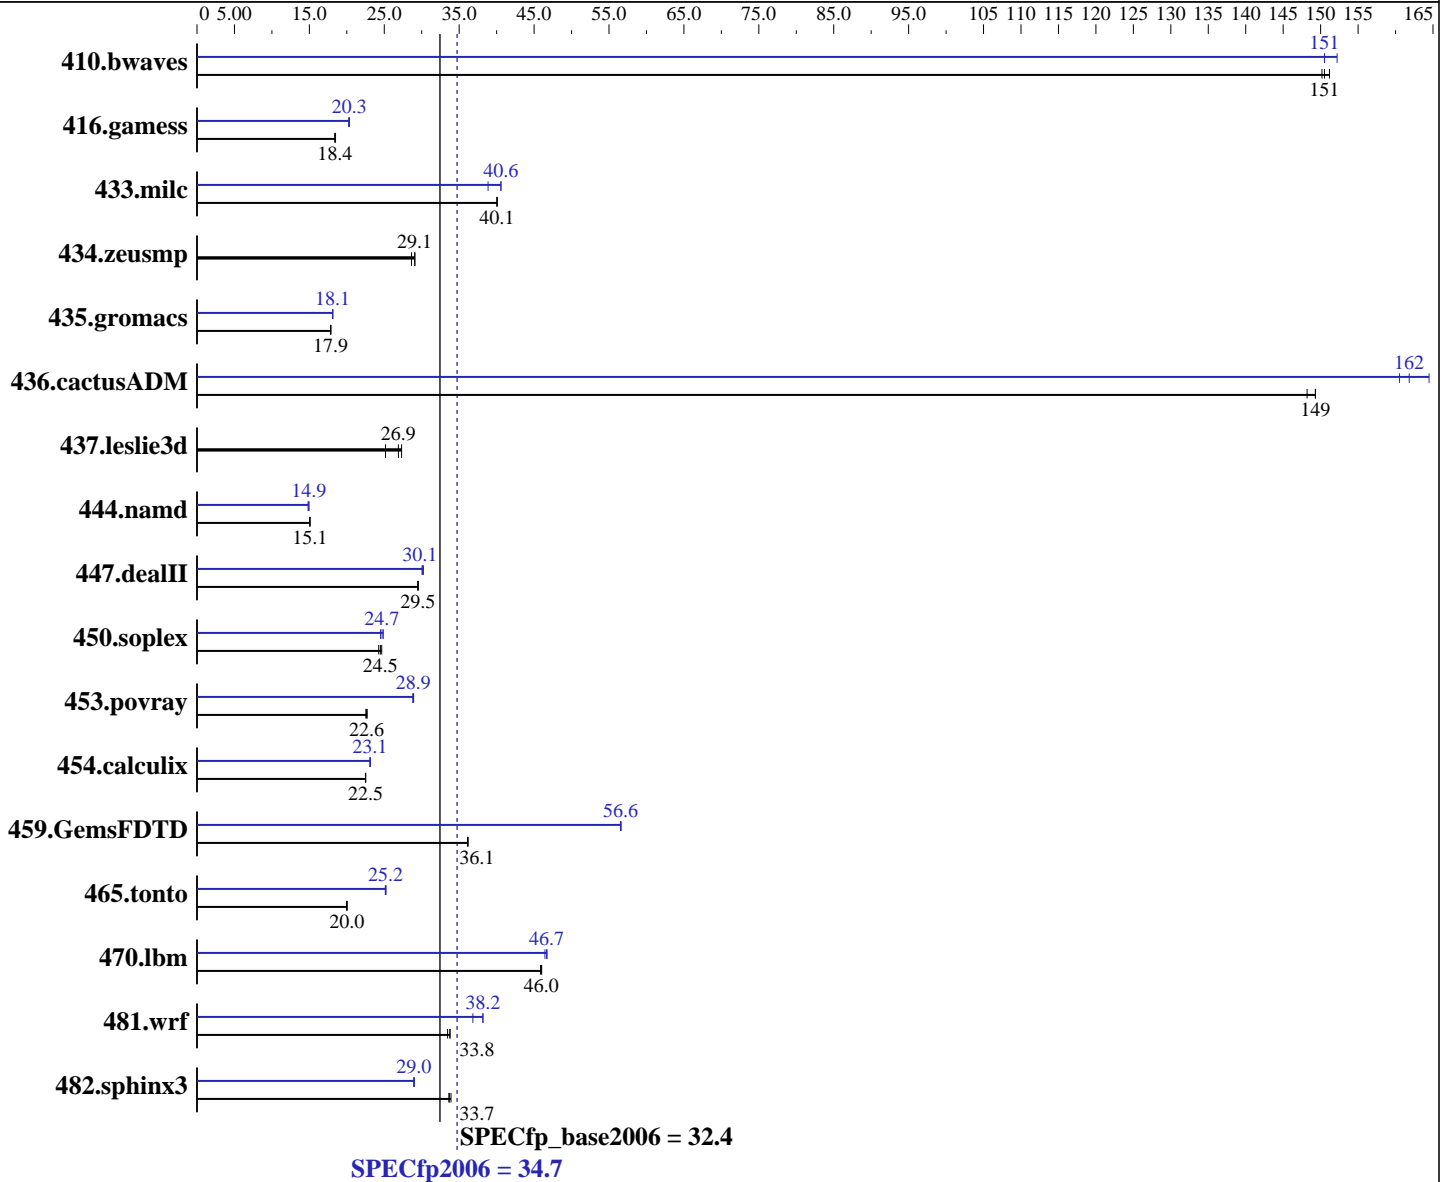

### Hardware

CPU Name: Intel Xeon E5520  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.53 GHz  
 CPU MHz: 2267  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-default  
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l\_cproc\_p\_11.1.064, l\_cprof\_p\_11.1.064  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R440 F2  
(Intel Xeon E5520, 2.27 GHz)

SPECfp2006 = 34.7

SPECfp\_base2006 = 32.4

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: May-2010

Hardware Availability: Jan-2010

Software Availability: Dec-2009

L3 Cache: 8 MB I+D on chip per chip  
Other Cache: None  
Memory: 48 GB (12 x 4 GB PC3-10600R, 2 Rank, CL9-9-9, ECC, running at 1066 MHz)  
Disk Subsystem: 1 x 73 GB SAS, 10000 RPM  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<b>90.3</b>	<b>151</b>	90.5	150	89.9	151	90.3	151	<b>90.3</b>	<b>151</b>	89.3	152
416.gamess	1059	18.5	<b>1062</b>	<b>18.4</b>	1064	18.4	967	20.2	962	20.3	<b>963</b>	<b>20.3</b>
433.milc	229	40.1	<b>229</b>	<b>40.1</b>	229	40.0	236	38.9	<b>226</b>	<b>40.6</b>	226	40.6
434.zeusmp	<b>313</b>	<b>29.1</b>	313	29.1	318	28.6	<b>313</b>	<b>29.1</b>	313	29.1	318	28.6
435.gromacs	400	17.9	<b>400</b>	<b>17.9</b>	400	17.8	395	18.1	<b>394</b>	<b>18.1</b>	394	18.1
436.cactusADM	80.0	149	<b>80.0</b>	<b>149</b>	80.6	148	74.4	161	72.7	164	<b>73.8</b>	<b>162</b>
437.leslie3d	344	27.3	<b>350</b>	<b>26.9</b>	374	25.2	344	27.3	<b>350</b>	<b>26.9</b>	374	25.2
444.namd	<b>532</b>	<b>15.1</b>	532	15.1	532	15.1	537	14.9	541	14.8	<b>537</b>	<b>14.9</b>
447.dealII	387	29.5	388	29.5	<b>388</b>	<b>29.5</b>	378	30.2	<b>380</b>	<b>30.1</b>	381	30.1
450.soplex	<b>341</b>	<b>24.5</b>	344	24.3	338	24.7	<b>338</b>	<b>24.7</b>	340	24.5	335	24.9
453.povray	236	22.5	234	22.7	<b>235</b>	<b>22.6</b>	184	28.9	<b>184</b>	<b>28.9</b>	185	28.8
454.calculix	366	22.5	367	22.5	<b>366</b>	<b>22.5</b>	<b>357</b>	<b>23.1</b>	356	23.1	357	23.1
459.GemsFDTD	293	36.2	<b>294</b>	<b>36.1</b>	294	36.1	<b>188</b>	<b>56.6</b>	187	56.6	188	56.6
465.tonto	<b>491</b>	<b>20.0</b>	491	20.0	493	20.0	390	25.2	391	25.1	<b>391</b>	<b>25.2</b>
470.lbm	299	46.0	<b>299</b>	<b>46.0</b>	300	45.9	<b>294</b>	<b>46.7</b>	294	46.7	296	46.4
481.wrf	334	33.5	331	33.8	<b>331</b>	<b>33.8</b>	303	36.8	293	38.2	<b>293</b>	<b>38.2</b>
482.sphinx3	575	33.9	579	33.6	<b>579</b>	<b>33.7</b>	<b>672</b>	<b>29.0</b>	672	29.0	674	28.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

OMP\_NUM\_THREADS set to number of cores  
KMP\_AFFINITY set to granularity=fine,scatter  
KMP\_STACKSIZE set to 200M  
Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502  
The Dell PowerEdge R610 and  
the Bull NovaScale R440 F2 models are electronically equivalent.  
The results have been measured on a Bull NovaScale R440 F2 model.

## Base Compiler Invocation

C benchmarks:  
icc -m64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R440 F2  
(Intel Xeon E5520, 2.27 GHz)

SPECfp2006 = 34.7

SPECfp\_base2006 = 32.4

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Bull SAS

Test date: May-2010  
Hardware Availability: Jan-2010  
Software Availability: Dec-2009

## Base Compiler Invocation (Continued)

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R440 F2  
(Intel Xeon E5520, 2.27 GHz)

SPECfp2006 = 34.7

SPECfp\_base2006 = 32.4

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Bull SAS

Test date: May-2010  
Hardware Availability: Jan-2010  
Software Availability: Dec-2009

## Peak Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-ansi-alias

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-parallel -ansi-alias -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32  
-unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias -scalar-rep- -auto-ilp32

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3 -auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R440 F2  
(Intel Xeon E5520, 2.27 GHz)

SPECfp2006 = 34.7

SPECfp\_base2006 = 32.4

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Bull SAS

Test date: May-2010  
Hardware Availability: Jan-2010  
Software Availability: Dec-2009

## Peak Optimization Flags (Continued)

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch  
-parallel

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -opt-prefetch -parallel

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-inline-alloc -opt-malloc-options=3 -auto -unroll4

### Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: Same as 454.calculix

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100511.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100511.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R440 F2  
(Intel Xeon E5520, 2.27 GHz)

SPECfp2006 = 34.7

SPECfp\_base2006 = 32.4

**CPU2006 license:** 20  
**Test sponsor:** Bull SAS  
**Tested by:** Bull SAS

**Test date:** May-2010  
**Hardware Availability:** Jan-2010  
**Software Availability:** Dec-2009

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 08:09:28 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 22 June 2010.