



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R610
(Intel Xeon E5540, 2.53 GHz)

SPECint®_rate2006 = 226

SPECint_rate_base2006 = 212

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Bull SAS

Test date: May-2010

Hardware Availability: Mar-2009

Software Availability: Dec-2009

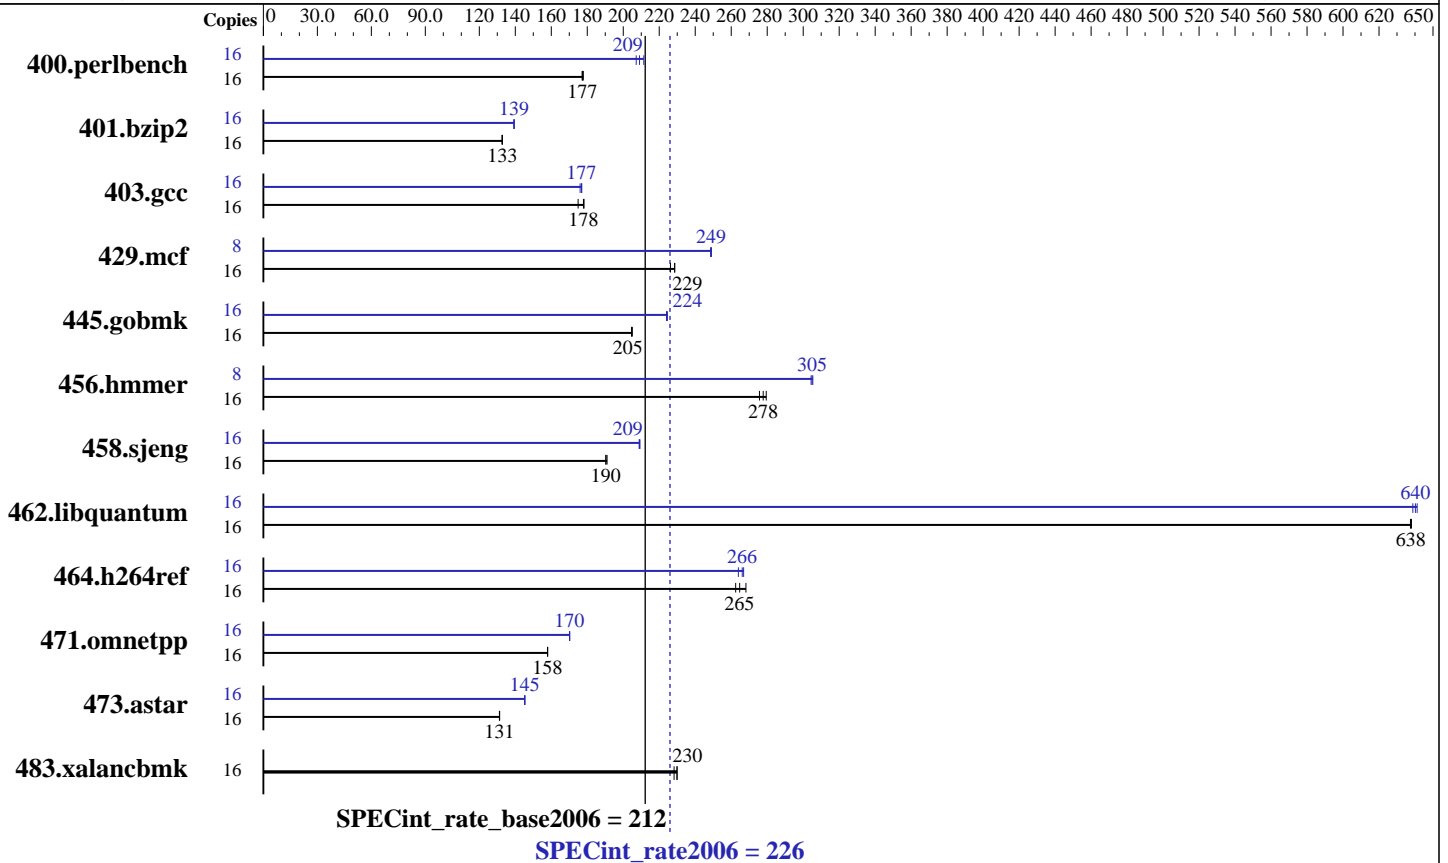

Hardware

CPU Name: Intel Xeon E5540
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz
 CPU MHz: 2533
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (12 x 4 GB PC3-10600R, 2 Rank, CL9-9-9, ECC, running at 1066 MHz)
 Disk Subsystem: 1 x 73 GB SAS, 10000 RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-default
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 226

PowerEdge R610
(Intel Xeon E5540, 2.53 GHz)

SPECint_rate_base2006 = 212

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Bull SAS

Test date: May-2010
Hardware Availability: Mar-2009
Software Availability: Dec-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	882	177	879	178	882	177	16	748	209	739	211	754	207
401.bzip2	16	1164	133	1162	133	1162	133	16	1108	139	1108	139	1109	139
403.gcc	16	736	175	724	178	723	178	16	732	176	728	177	728	177
429.mcf	16	638	229	638	229	645	226	8	293	249	293	249	294	249
445.gobmk	16	819	205	820	205	820	205	16	749	224	749	224	748	225
456.hammer	16	537	278	534	279	541	276	8	245	305	245	304	244	305
458.sjeng	16	1017	190	1014	191	1017	190	16	927	209	925	209	927	209
462.libquantum	16	520	638	520	638	520	637	16	518	640	519	639	517	641
464.h264ref	16	1338	265	1349	262	1320	268	16	1341	264	1331	266	1327	267
471.omnetpp	16	633	158	633	158	633	158	16	588	170	587	170	588	170
473.astar	16	856	131	856	131	856	131	16	773	145	773	145	773	145
483.xalancbmk	16	480	230	484	228	480	230	16	480	230	484	228	480	230

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502
The Dell PowerEdge R610 and
the Bull NovaScale R440 F2 models are electronically equivalent.
The results have been measured on a Bull NovaScale R440 F2 model.

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R610
(Intel Xeon E5540, 2.53 GHz)

SPECint_rate2006 = 226

SPECint_rate_base2006 = 212

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Bull SAS

Test date: May-2010
Hardware Availability: Mar-2009
Software Availability: Dec-2009

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.icl1.1/libic1.1-32bit -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

462.libquantum: icc -m64

C++ benchmarks (except as noted below):
icpc -m32

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R610
(Intel Xeon E5540, 2.53 GHz)

SPECint_rate2006 = 226

SPECint_rate_base2006 = 212

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Bull SAS

Test date: May-2010
Hardware Availability: Mar-2009
Software Availability: Dec-2009

Peak Portability Flags (Continued)

456.hmmcr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -ansi-alias
401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32
403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static
429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
-ipo -no-prec-div -ansi-alias
456.hmmcr: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias -auto-ilp32
458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll4 -auto-ilp32
462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32
-opt-prefetch
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R610
(Intel Xeon E5540, 2.53 GHz)

SPECint_rate2006 = 226

SPECint_rate_base2006 = 212

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Bull SAS

Test date: May-2010

Hardware Availability: Mar-2009

Software Availability: Dec-2009

Peak Optimization Flags (Continued)

473.astar (continued):

`-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64`

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100511.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100511.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 08:34:53 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 22 June 2010.