



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint[®]_rate2006 = 398

ProLiant DL585 G7
(2.3 GHz AMD Opteron 6176 SE)

SPECint_rate_base2006 = 308

CPU2006 license: 3


Test date: Apr-2010

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2010

Tested by: Hewlett-Packard Company

Software Availability: Mar-2010

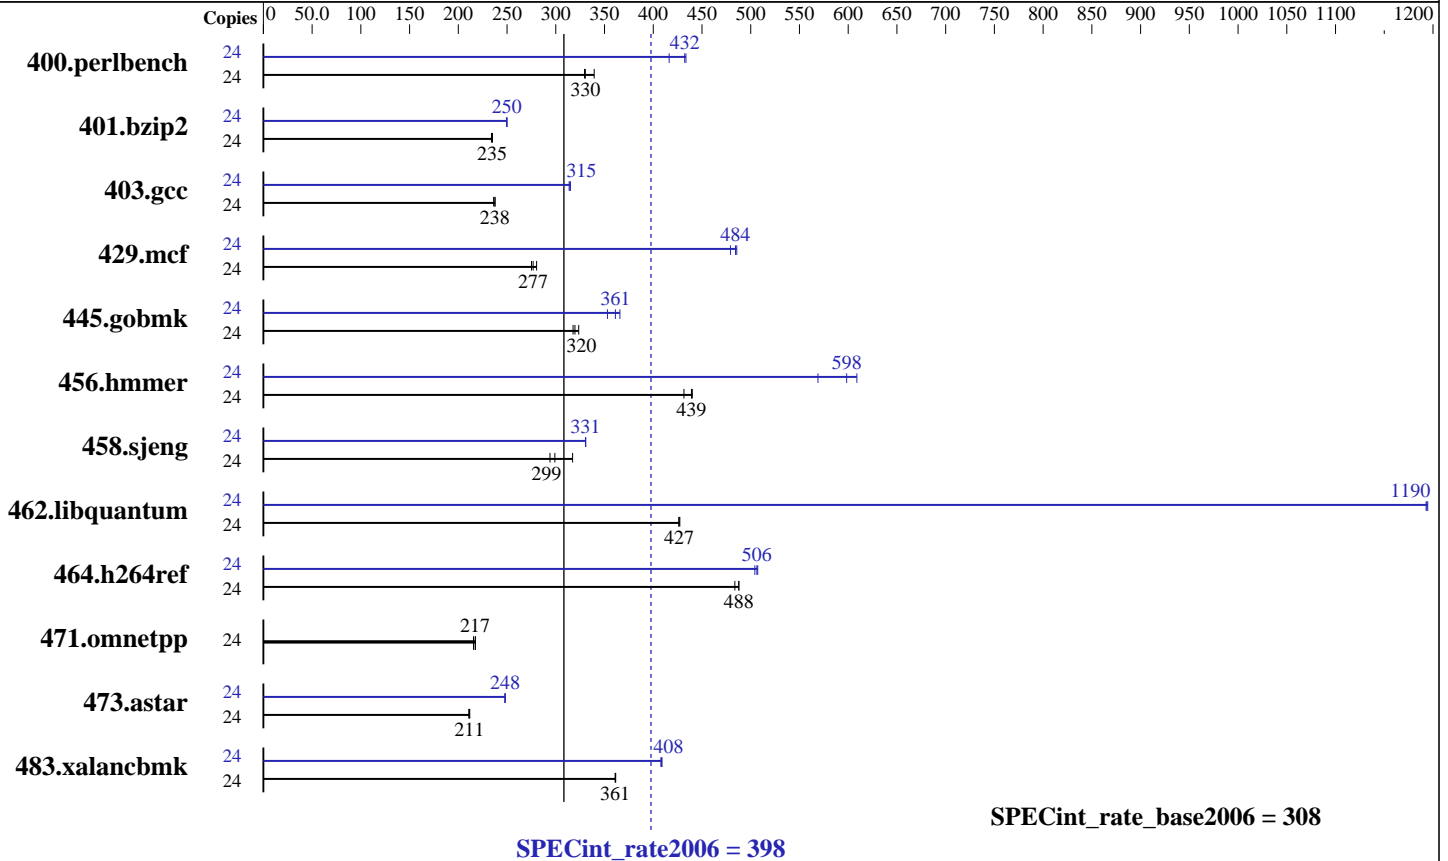

Hardware

CPU Name: AMD Opteron 6176 SE
 CPU Characteristics:
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip
 CPU(s) orderable: 2,4 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core
 L3 Cache: 12 MB I+D on chip per chip, 6 MB shared / 6 cores
 Other Cache: None
 Memory: 64 GB (16x4 GB PC3-10600R, CL9)
 Disk Subsystem: 4 x 72 GB 15 K SAS
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 5.4, Advanced Platform with patch RHSA-2009:1670, Kernel 2.6.18-164.9.1.el5
 Compiler: x86 Open64 4.2.3 Compiler Suite
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: binutils 2.18, SmartHeap 8.1 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 398

ProLiant DL585 G7
(2.3 GHz AMD Opteron 6176 SE)

SPECint_rate_base2006 = 308

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Apr-2010
Hardware Availability: Jun-2010
Software Availability: Mar-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	691	339	710	330	712	330	24	563	416	542	432	541	434
401.bzip2	24	985	235	987	235	990	234	24	928	249	927	250	927	250
403.gcc	24	818	236	813	238	813	238	24	614	315	616	314	613	315
429.mcf	24	796	275	791	277	781	280	24	451	486	457	479	452	484
445.gobmk	24	792	318	778	324	788	320	24	697	361	713	353	688	366
456.hammer	24	510	439	509	440	519	431	24	394	569	374	598	368	609
458.sjeng	24	988	294	915	317	971	299	24	879	331	878	331	879	330
462.libquantum	24	1166	427	1164	427	1167	426	24	417	1190	416	1190	417	1190
464.h264ref	24	1089	488	1089	488	1098	484	24	1053	504	1049	506	1047	507
471.omnetpp	24	690	217	690	217	696	216	24	690	217	690	217	696	216
473.astar	24	799	211	796	212	797	211	24	680	248	680	248	679	248
483.xalancbmk	24	459	361	459	361	458	361	24	405	408	405	409	406	408

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=10800 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

Platform Notes

BIOS Configuration:
HP Power Profile set to Maximum Performance
Thermal Configuration set to Increased Cooling

General Notes

Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "450"
LD_LIBRARY_PATH = "/cpu2006/amd1002mc-rate-revA-libs/64:/cpu2006/amd1002mc-rate-revA-libs/32"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
<http://developer.amd.com/cpu/open64>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 398

ProLiant DL585 G7
(2.3 GHz AMD Opteron 6176 SE)

SPECint_rate_base2006 = 308

CPU2006 license: 3

Test date: Apr-2010

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2010

Tested by: Hewlett-Packard Company

Software Availability: Mar-2010

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-march=barcelona -mso -Ofast -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m

C++ benchmarks:
-march=barcelona -mso -Ofast -m32 -INLINE:aggressive=on
-CG:cmp_peep=on -L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 398

ProLiant DL585 G7
(2.3 GHz AMD Opteron 6176 SE)

SPECint_rate_base2006 = 308

CPU2006 license: 3

Test date: Apr-2010

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2010

Tested by: Hewlett-Packard Company

Software Availability: Mar-2010

Peak Portability Flags (Continued)

456.hmmr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalanbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
-CG:local_sched_alg=1 -CG:unroll_fb_req=on
-HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:alias=disjoint
-OPT:goto=off -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
-LNO:prefetch_ahead=10 -CG:cmp_peep=on -m32
-HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200

429.mcf: -march=barcelona -mso -O3 -ipa -INLINE:aggressive=on
-CG:gcm=off -GRA:prioritize_by_density=on -m32
-HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -ipa -IPA:plimit=750
-IPA:min_hotness=300 -IPA:pu_reorder=1 -LNO:prefetch=1
-LNO:ignore_feedback=off -CG:p2align=on
-CG:unroll_fb_req=on -HP:bdt=2m:heap=2m

456.hmmr: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=0
-OPT:alias=disjoint -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
-CG:local_sched_alg=1 -CG:cflow=0
-CG:push_pop_int_saved_regs=off -CG:cmp_peep=on
-HP:bdt=2m:heap=2m

458.sjeng: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -ipa -LNO:ignore_feedback=off
-LNO:full_unroll=10 -LNO:fusion=0 -LNO:fission=2

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 398

ProLiant DL585 G7
(2.3 GHz AMD Opteron 6176 SE)

SPECint_rate_base2006 = 308

CPU2006 license: 3

Test date: Apr-2010

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2010

Tested by: Hewlett-Packard Company

Software Availability: Mar-2010

Peak Optimization Flags (Continued)

458.sjeng (continued):

```
-IPA:pu_reorder=2 -CG:ptr_load_use=0
-OPT:unroll_times_max=8 -INLINE:aggressive=on
```

```
462.libquantum: -march=barcelona -mso -Ofast -LNO:pf2=0 -CG:gcm=off
-CG:use_prefetchnta=on -CG:cmp_peep=on -WOPT:aggstr=0
-HP:bdt=2m:heap=2m -OPT:alias=disjoint
-INLINE:aggressive=on -IPA:space=1000 -IPA:plimit=20000
```

```
464.h264ref: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -IPA:plimit=20000
-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
-CG:push_pop_int_saved_regs=off
```

C++ benchmarks:

471.omnetpp: basepeak = yes

```
473.astar: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -TENV:frame_pointer=off
-WOPT:if_conv=0 -GRA:optimize_boundary=on
-OPT:alias=disjoint -INLINE:aggressive=on
-IPA:small_pu=3000 -IPA:plimit=3000 -m32
-HP:bdt=2m:heap=2m
```

```
483.xalancbmk: -march=barcelona -mso -Ofast -INLINE:aggressive=on -m32
-CG:cmp_peep=on -GRA:unspill=on -TENV:frame_pointer=off
-fno-emit-exceptions
-L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.3-flags-revA.html>

<http://www.spec.org/cpu2006/flags/amd-platform-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.3-flags-revA.xml>

<http://www.spec.org/cpu2006/flags/amd-platform-revA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 08:11:39 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 22 June 2010.

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 5