



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec


SPECint®_rate2006 = 326

Servidor Itaotec MX223 (Intel Xeon X5650)

SPECint_rate_base2006 = 303

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Jun-2010
Hardware Availability: Apr-2010
Software Availability: Apr-2010

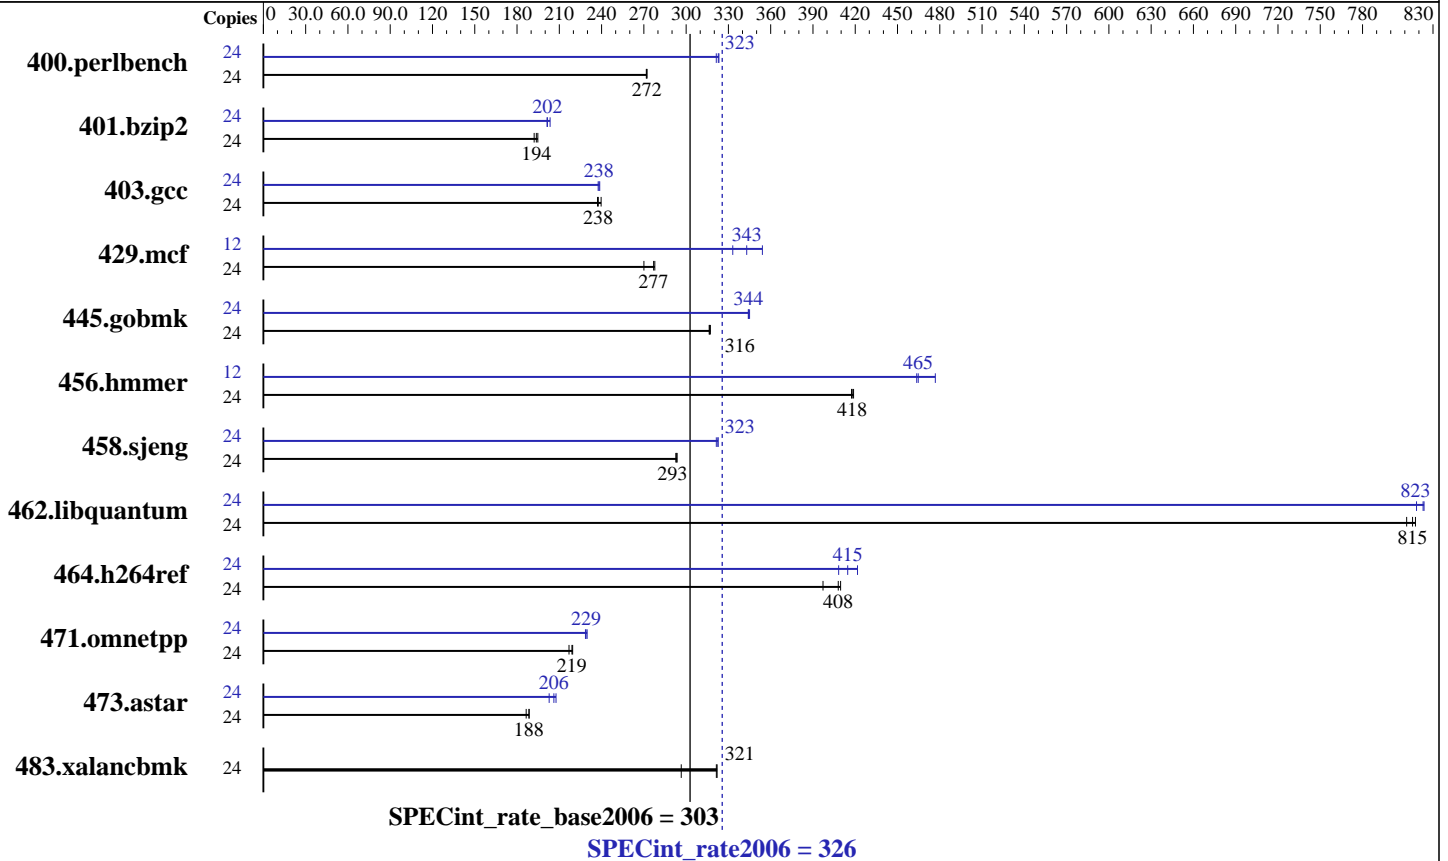

Hardware

CPU Name: Intel Xeon X5650
 CPU Characteristics: Intel Turbo Boost Technology up to 3.06 GHz
 CPU MHz: 2667
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1, 2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 24 GB (6 x 4GB, DDR3-1333, Dual Rank, CL 9, ECC)
 Disk Subsystem: 1 x 160 GB SATA-2, 7200 RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-smp
 Compiler: Intel C++ Professional Compiler 11.1 for Linux Build 20100414 Package ID: l_cproc_p_11.1.072
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint_rate2006 = 326

Servidor Itaotec MX223 (Intel Xeon X5650)

SPECint_rate_base2006 = 303

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Jun-2010
Hardware Availability: Apr-2010
Software Availability: Apr-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	862	272	862	272	863	272	24	725	323	726	323	730	321
401.bzip2	24	1205	192	1189	195	1196	194	24	1150	201	1138	203	1149	202
403.gcc	24	806	240	813	238	815	237	24	809	239	813	238	811	238
429.mcf	24	811	270	788	278	790	277	12	329	333	319	343	309	354
445.gobmk	24	796	316	794	317	796	316	24	730	345	731	344	732	344
456.hammer	24	535	419	536	418	536	417	12	241	464	235	477	241	465
458.sjeng	24	989	294	990	293	992	293	24	900	323	900	323	904	321
462.libquantum	24	613	811	610	815	608	818	24	608	818	604	823	604	824
464.h264ref	24	1297	410	1302	408	1337	397	24	1260	422	1301	408	1281	415
471.omnetpp	24	692	217	685	219	683	219	24	653	230	656	229	655	229
473.astar	24	903	186	893	189	894	188	24	831	203	817	206	811	208
483.xalancbmk	24	558	297	515	321	514	322	24	558	297	515	321	514	322

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.

General Notes

This result was measured on the Servidor Itaotec MX223.
The Servidor Itaotec MX203 and the Servidor Itaotec MX223 are electronically equivalent.

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint_rate2006 = 326

Servidor Itautec MX223 (Intel Xeon X5650)

SPECint_rate_base2006 = 303

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Jun-2010
Hardware Availability: Apr-2010
Software Availability: Apr-2010

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/opt/sh/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

462.libquantum: icc -m64

C++ benchmarks (except as noted below):
icpc -m32

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint_rate2006 = 326

Servidor Itaotec MX223 (Intel Xeon X5650)

SPECint_rate_base2006 = 303

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Jun-2010
Hardware Availability: Apr-2010
Software Availability: Apr-2010

Peak Portability Flags (Continued)

456.hmmcr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -ansi-alias
401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32
403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static
429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
-ipo -no-prec-div -ansi-alias
456.hmmcr: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias -auto-ilp32
458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll4 -auto-ilp32
462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32
-opt-prefetch
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/opt/sh/SmartHeap_8.1/lib -lsmartheap
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint_rate2006 = 326

Servidor Itautec MX223 (Intel Xeon X5650)

SPECint_rate_base2006 = 303

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Jun-2010
Hardware Availability: Apr-2010
Software Availability: Apr-2010

Peak Optimization Flags (Continued)

473.astar (continued):
-L/opt/sh/SmartHeap_8/lib -lsmartheap64

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Itautec-Intel-ic11.1-linux64-revE.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Itautec-Intel-ic11.1-linux64-revE.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 13:23:33 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 8 July 2010.