



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/E110b-1
(Intel Celeron G1101)

SPECint[®]_rate2006 = 35.6

SPECint_rate_base2006 = 32.2

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jun-2010

Hardware Availability: Apr-2010

Software Availability: Dec-2009

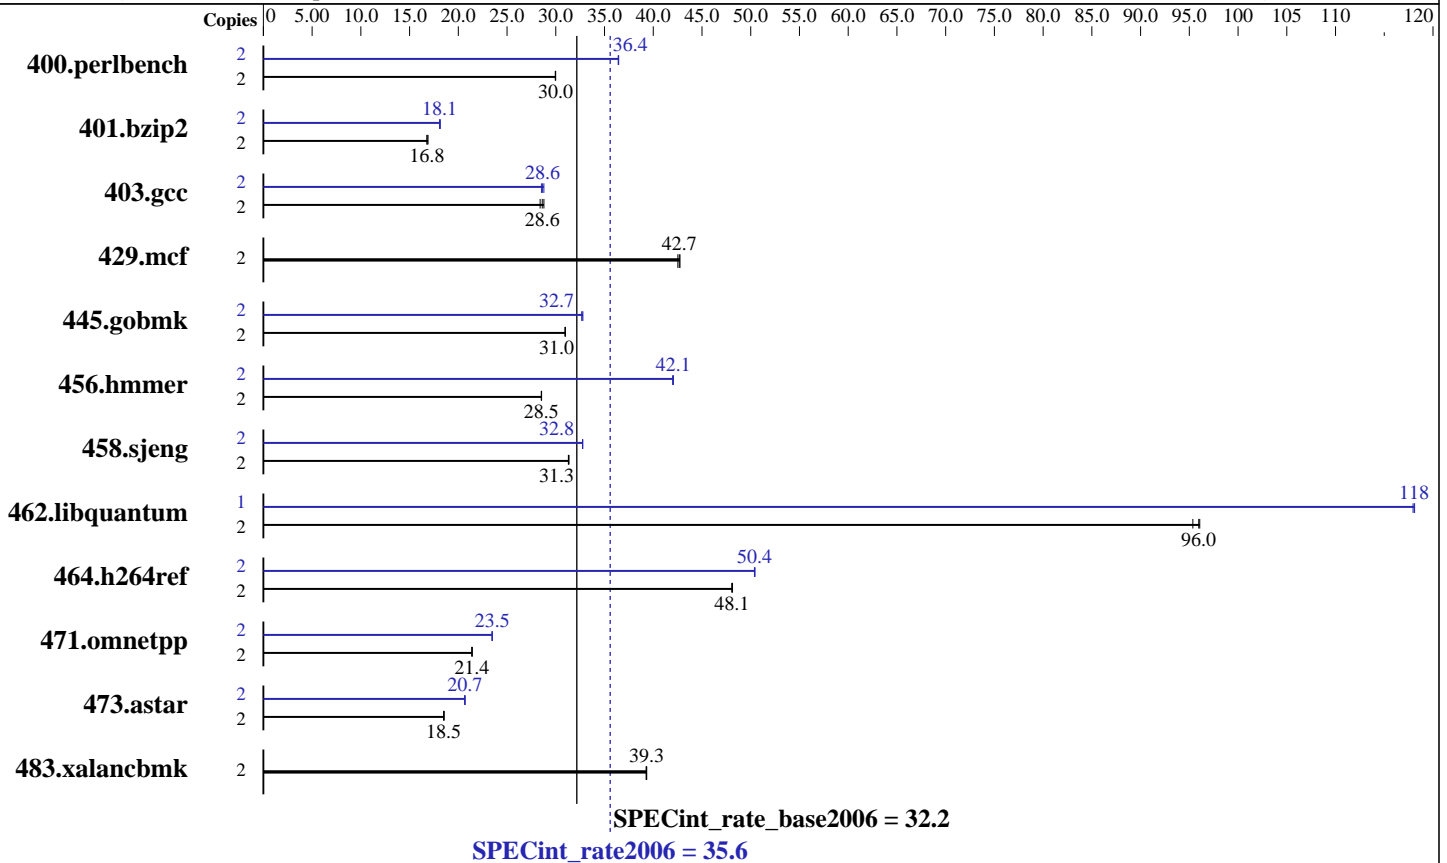

Hardware

CPU Name: Intel Celeron G1101
 CPU Characteristics: 2267
 CPU MHz: 2267
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 2 MB I+D on chip per chip
 Other Cache: None
 Memory: 8 GB (2 x 4 GB PC3-10600E, 2 rank, CL9, ECC, running at 1066 MHz)
 Disk Subsystem: 1x160 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-default
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: 1_cproc_p_11.1.064
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/E110b-1
(Intel Celeron G1101)

SPECint_rate2006 = 35.6

SPECint_rate_base2006 = 32.2

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Jun-2010
Hardware Availability: Apr-2010
Software Availability: Dec-2009

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
400.perlbench	2	652	29.9	652	30.0	652	30.0	2	536	36.5	536	36.4	537	36.4		
401.bzip2	2	1142	16.9	1150	16.8	1150	16.8	2	1063	18.2	1067	18.1	1067	18.1		
403.gcc	2	563	28.6	567	28.4	559	28.8	2	559	28.8	564	28.5	562	28.6		
429.mcf	2	427	42.7	427	42.7	429	42.5	2	427	42.7	427	42.7	429	42.5		
445.gobmk	2	678	30.9	677	31.0	677	31.0	2	642	32.7	642	32.7	640	32.8		
456.hammer	2	654	28.5	654	28.5	654	28.5	2	444	42.1	444	42.1	444	42.0		
458.sjeng	2	772	31.4	773	31.3	773	31.3	2	739	32.8	739	32.8	739	32.8		
462.libquantum	2	435	95.4	431	96.1	432	96.0	1	175	118	175	118	176	118		
464.h264ref	2	920	48.1	920	48.1	921	48.1	2	878	50.4	878	50.4	878	50.4		
471.omnetpp	2	583	21.4	585	21.4	584	21.4	2	532	23.5	532	23.5	533	23.5		
473.astar	2	759	18.5	759	18.5	757	18.5	2	679	20.7	680	20.6	678	20.7		
483.xalancbmk	2	351	39.3	351	39.3	351	39.3	2	351	39.3	351	39.3	351	39.3		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
taskset has been used to bind processes to cores except
for 462.libquantum peak

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

Default BIOS settings were used.

General Notes

OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/E110b-1
(Intel Celeron G1101)

SPECint_rate2006 = 35.6

SPECint_rate_base2006 = 32.2

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jun-2010

Hardware Availability: Apr-2010

Software Availability: Dec-2009

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSSE3 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3 -opt-prefetch

C++ benchmarks:

-xSSSE3 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/opt/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

401.bzip2: icc -m64

456.hmmer: icc -m64

462.libquantum: icc -m64

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/E110b-1
(Intel Celeron G1101)

SPECint_rate2006 = 35.6

SPECint_rate_base2006 = 32.2

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jun-2010

Hardware Availability: Apr-2010

Software Availability: Dec-2009

Peak Portability Flags (Continued)

462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -ansi-alias -opt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -opt-prefetch -ansi-alias

403.gcc: -xSSSE3 -ipo -O3 -no-prec-div -static -inline-alloc
-opt-malloc-options=3

429.mcf: basepeak = yes

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -O2 -ipo
-no-prec-div -ansi-alias

456.hmmer: -xSSSE3 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -unroll4

462.libquantum: -xSSSE3 -ipo -O3 -no-prec-div -static
-opt-malloc-options=3 -parallel -auto-ilp32 -opt-prefetch

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias
-opt-ra-region-strategy=routine -Wl,-z,muldefs
-L/opt/SmartHeap_8.1/lib64 -lsmartheap64

483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/E110b-1
(Intel Celeron G1101)

SPECint_rate2006 = 35.6

SPECint_rate_base2006 = 32.2

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jun-2010

Hardware Availability: Apr-2010

Software Availability: Dec-2009

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100609.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100609.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 13:27:32 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 8 July 2010.