



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

SGI

SPECfp[®]2006 = **45.3**

SGI Altix XE 340 (Intel Xeon X5670, 2.93GHz)

SPECfp_base2006 = **42.4**

CPU2006 license: 4


Test sponsor: SGI

Tested by: SGI

Test date: Jun-2010

Hardware Availability: May-2010

Software Availability: Jan-2010

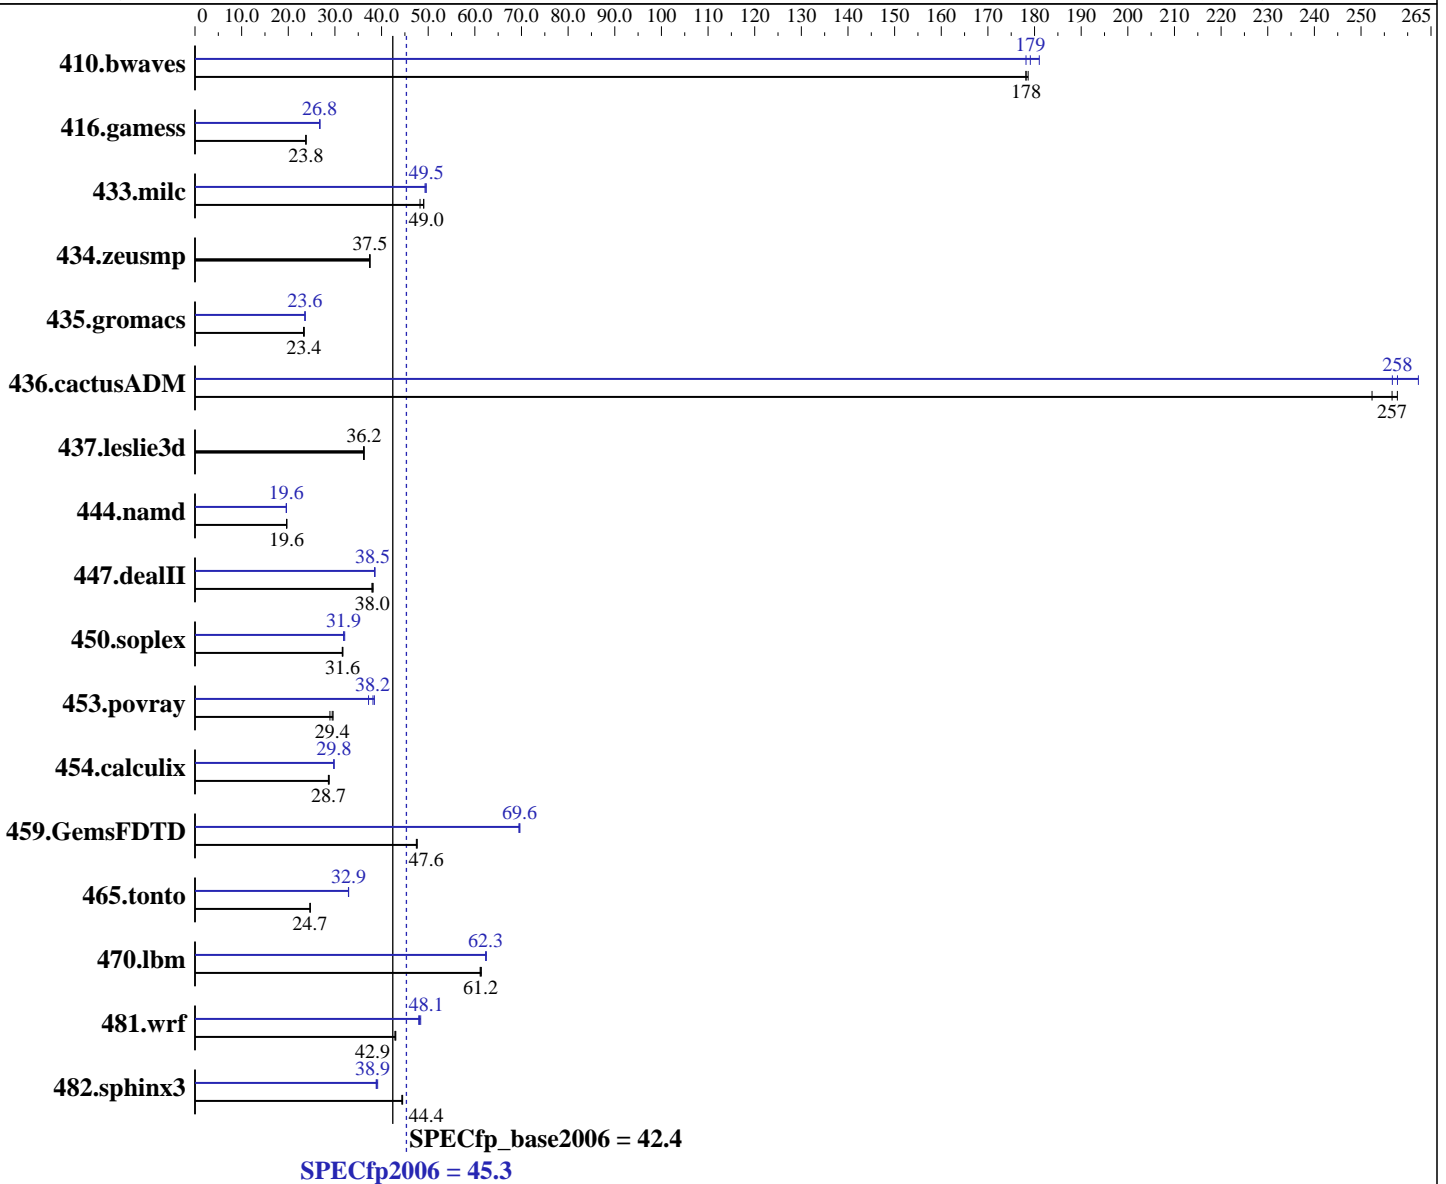

Hardware

CPU Name: Intel Xeon X5670
 CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz
 CPU MHz: 2933
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64), kernel 2.6.27.39-0.3-default
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: I_cproc_p_11.1.064, I_cprof_p_11.1.064
 Auto Parallel: Yes
 File System: xfs
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

SGI

SPECfp2006 = **45.3**

SGI Altix XE 340 (Intel Xeon X5670, 2.93GHz)

SPECfp_base2006 = **42.4**

CPU2006 license: 4

Test date: Jun-2010

Test sponsor: SGI

Hardware Availability: May-2010

Tested by: SGI

Software Availability: Jan-2010

L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (12 x 4 GB DDR3-1333 CL9 RDIMMs)
 Disk Subsystem: 2 x 146 GB SAS (Seagate Cheetah 15000rpm)
 Other Hardware: None

Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<u>76.3</u>	<u>178</u>	76.3	178	76.1	179	75.1	181	76.3	178	<u>75.9</u>	<u>179</u>
416.gamess	822	23.8	824	23.7	<u>822</u>	<u>23.8</u>	732	26.7	<u>732</u>	<u>26.8</u>	732	26.8
433.milc	<u>187</u>	<u>49.0</u>	190	48.2	187	49.0	185	49.6	186	49.3	<u>185</u>	<u>49.5</u>
434.zeusmp	243	37.4	242	37.5	<u>243</u>	<u>37.5</u>	243	37.4	242	37.5	<u>243</u>	<u>37.5</u>
435.gromacs	307	23.3	305	23.4	<u>305</u>	<u>23.4</u>	303	23.6	303	23.6	<u>303</u>	<u>23.6</u>
436.cactusADM	46.4	258	<u>46.6</u>	<u>257</u>	47.4	252	46.5	257	<u>46.4</u>	<u>258</u>	45.6	262
437.leslie3d	<u>260</u>	<u>36.2</u>	259	36.3	260	36.1	<u>260</u>	<u>36.2</u>	259	36.3	260	36.1
444.namd	407	19.7	<u>408</u>	<u>19.6</u>	408	19.6	<u>409</u>	<u>19.6</u>	410	19.6	409	19.6
447.dealII	<u>301</u>	<u>38.0</u>	299	38.2	302	37.9	297	38.5	296	38.6	<u>297</u>	<u>38.5</u>
450.soplex	264	31.6	<u>264</u>	<u>31.6</u>	263	31.7	262	31.9	<u>261</u>	<u>31.9</u>	260	32.1
453.povray	184	28.9	180	29.6	<u>181</u>	<u>29.4</u>	143	37.2	138	38.5	<u>139</u>	<u>38.2</u>
454.calculix	287	28.8	<u>288</u>	<u>28.7</u>	289	28.6	277	29.8	<u>277</u>	<u>29.8</u>	277	29.8
459.GemsFDTD	224	47.5	223	47.6	<u>223</u>	<u>47.6</u>	152	69.6	153	69.4	<u>152</u>	<u>69.6</u>
465.tonto	399	24.7	398	24.7	<u>399</u>	<u>24.7</u>	<u>299</u>	<u>32.9</u>	299	32.9	299	32.9
470.lbm	<u>224</u>	<u>61.2</u>	224	61.4	225	61.1	<u>220</u>	<u>62.3</u>	220	62.3	220	62.5
481.wrf	259	43.1	260	42.9	<u>260</u>	<u>42.9</u>	<u>232</u>	<u>48.1</u>	231	48.4	233	48.0
482.sphinx3	438	44.5	<u>439</u>	<u>44.4</u>	439	44.4	<u>501</u>	<u>38.9</u>	498	39.2	502	38.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

OMP_NUM_THREADS set to number of cores
 KMP_AFFINITY set to granularity=fine,scatter
 KMP_STACKSIZE set to 200M

Base Compiler Invocation

C benchmarks:
 icc -m64

C++ benchmarks:
 icpc -m64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

SGI

SPECfp2006 = 45.3

SGI Altix XE 340 (Intel Xeon X5670, 2.93GHz)

SPECfp_base2006 = 42.4

CPU2006 license: 4

Test date: Jun-2010

Test sponsor: SGI

Hardware Availability: May-2010

Tested by: SGI

Software Availability: Jan-2010

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Peak Compiler Invocation

C benchmarks:

icc -m64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

SGI

SPECfp2006 = 45.3

SGI Altix XE 340 (Intel Xeon X5670, 2.93GHz)

SPECfp_base2006 = 42.4

CPU2006 license: 4

Test date: Jun-2010

Test sponsor: SGI

Hardware Availability: May-2010

Tested by: SGI

Software Availability: Jan-2010

Peak Compiler Invocation (Continued)

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-ansi-alias

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-parallel -ansi-alias -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32
-unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep- -auto-ilp32

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3 -auto-ilp32

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

SGI

SPECfp2006 = 45.3

SGI Altix XE 340 (Intel Xeon X5670, 2.93GHz)

SPECfp_base2006 = 42.4

CPU2006 license: 4

Test date: Jun-2010

Test sponsor: SGI

Hardware Availability: May-2010

Tested by: SGI

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
-parallel

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -opt-prefetch -parallel

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-inline-alloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: Same as 454.calculix

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

SGI

SPECfp2006 = 45.3

SGI Altix XE 340 (Intel Xeon X5670, 2.93GHz)

SPECfp_base2006 = 42.4

CPU2006 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Jun-2010

Hardware Availability: May-2010

Software Availability: Jan-2010

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 11:10:29 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 20 July 2010.