



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp[®]2006 = **28.3**

PRIMERGY RX200 S6, Intel Xeon E5506, 2.13 GHz

SPECfp_base2006 = **26.3**

CPU2006 license: 19


Test date: May-2010

Test sponsor: Fujitsu

Hardware Availability: May-2010

Tested by: Fujitsu

Software Availability: Jan-2010

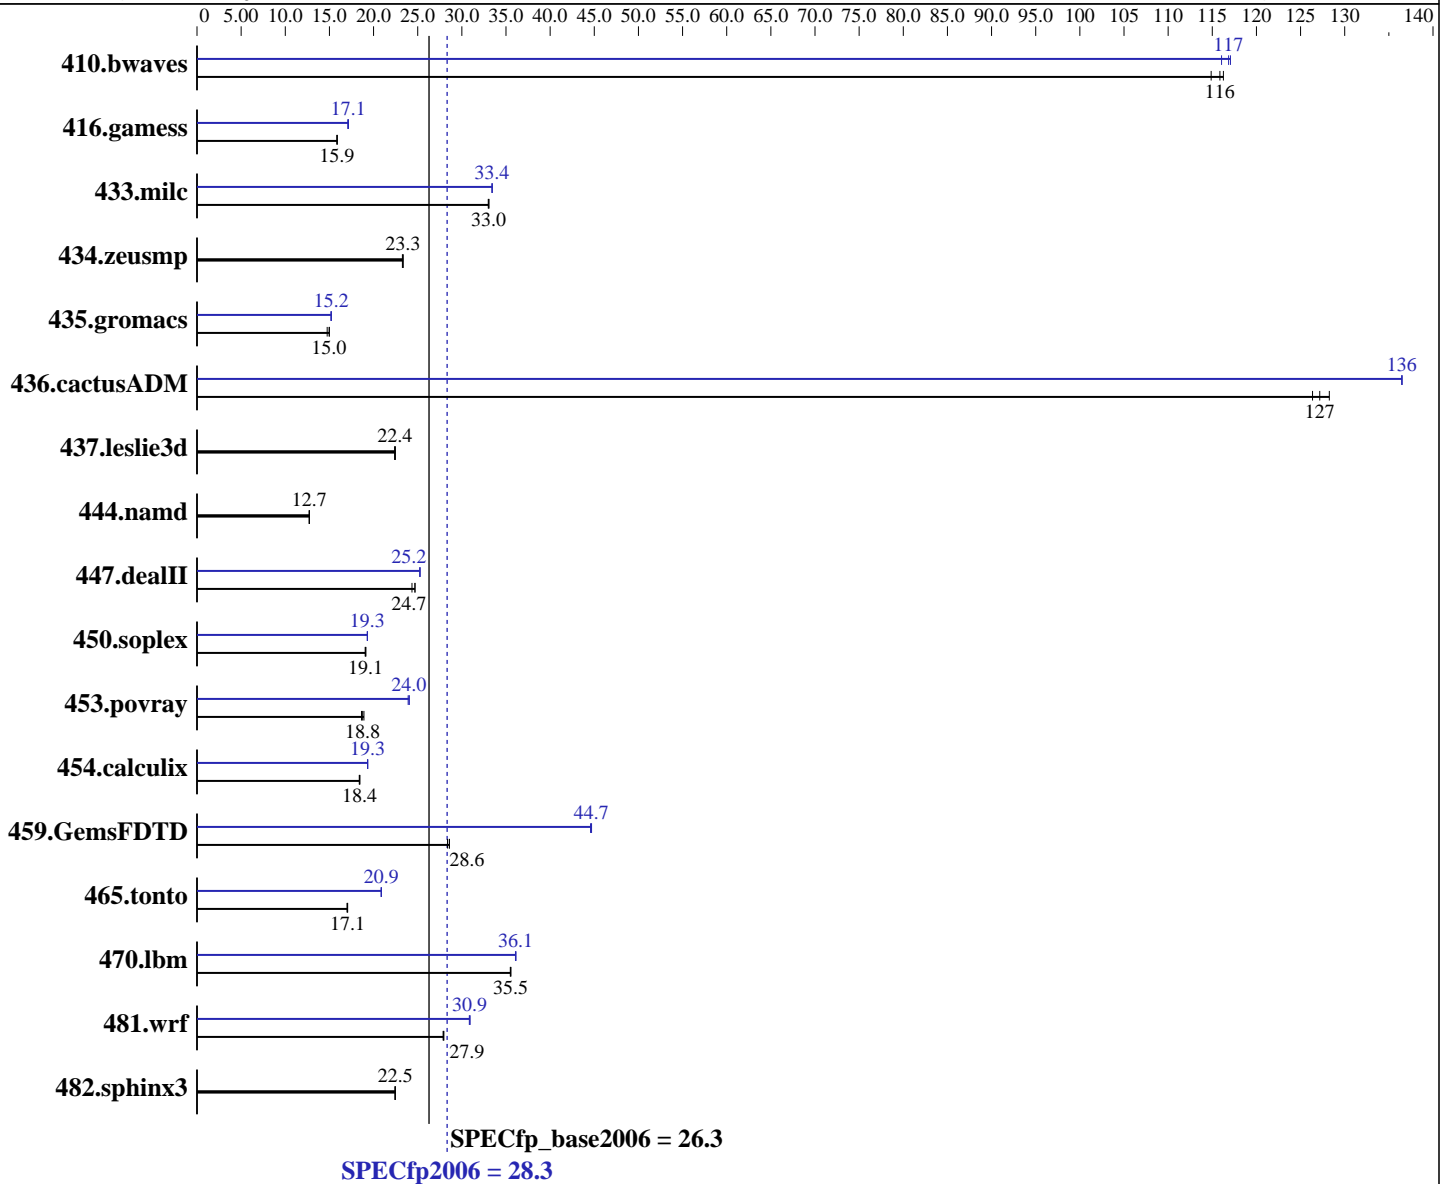

Hardware

CPU Name: Intel Xeon E5506
 CPU Characteristics:
 CPU MHz: 2133
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-default
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064, l_cprof_p_11.1.064
 Auto Parallel: Yes
 File System: ext3
 System State: Multi-User Run Level 3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = **28.3**

PRIMERGY RX200 S6, Intel Xeon E5506, 2.13 GHz

SPECfp_base2006 = **26.3**

CPU2006 license: 19

Test date: May-2010

Test sponsor: Fujitsu

Hardware Availability: May-2010

Tested by: Fujitsu

Software Availability: Jan-2010

L3 Cache: 4 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (12x4 GB PC3-10600R, 2 rank, CL9-9-9, ECC, see add'l detail in notes)
Disk Subsystem: 1 x SATA, 160 GB, 5400 RPM
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	118	115	117	116	117	116	117	116	116	117	116	117
416.gamess	1232	15.9	1234	15.9	1235	15.9	1141	17.2	1146	17.1	1143	17.1
433.milc	278	33.1	278	33.0	278	33.0	275	33.4	275	33.4	274	33.4
434.zeusmp	390	23.3	390	23.3	391	23.3	390	23.3	390	23.3	391	23.3
435.gromacs	477	15.0	476	15.0	484	14.7	471	15.2	469	15.2	469	15.2
436.cactusADM	94.6	126	93.2	128	94.0	127	87.6	136	87.6	136	87.6	136
437.leslie3d	418	22.5	419	22.4	420	22.4	418	22.5	419	22.4	420	22.4
444.namd	631	12.7	630	12.7	630	12.7	631	12.7	630	12.7	630	12.7
447.dealII	470	24.4	463	24.7	463	24.7	453	25.2	453	25.3	453	25.2
450.soplex	436	19.1	437	19.1	438	19.0	432	19.3	432	19.3	432	19.3
453.povray	284	18.8	286	18.6	281	18.9	221	24.0	222	23.9	221	24.0
454.calculix	449	18.4	448	18.4	447	18.5	427	19.3	427	19.3	427	19.3
459.GemsFDTD	371	28.6	374	28.4	371	28.6	237	44.7	238	44.6	238	44.7
465.tonto	577	17.1	577	17.1	579	17.0	471	20.9	471	20.9	471	20.9
470.lbm	387	35.5	387	35.5	387	35.5	380	36.1	381	36.1	381	36.1
481.wrf	401	27.9	400	27.9	400	27.9	361	30.9	362	30.8	361	30.9
482.sphinx3	868	22.5	869	22.4	868	22.5	868	22.5	869	22.4	868	22.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

The system automatically configures the memory to run at 800 MHz.
BIOS configuration:
Data Reuse Optimization = Disable

General Notes

OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter
KMP_STACKSIZE set to 200M

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = 28.3

PRIMERGY RX200 S6, Intel Xeon E5506, 2.13 GHz

SPECfp_base2006 = 26.3

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: May-2010
Hardware Availability: May-2010
Software Availability: Jan-2010

General Notes (Continued)

For information about Fujitsu please visit: <http://www.fujitsu.com>

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = 28.3

PRIMERGY RX200 S6, Intel Xeon E5506, 2.13 GHz

SPECfp_base2006 = 26.3

CPU2006 license: 19

Test date: May-2010

Test sponsor: Fujitsu

Hardware Availability: May-2010

Tested by: Fujitsu

Software Availability: Jan-2010

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-ansi-alias`

470.lbm: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-parallel -ansi-alias -auto-ilp32`

482.sphinx3: `basepeak = yes`

C++ benchmarks:

444.namd: `basepeak = yes`

447.dealIII: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep- -auto-ilp32`

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = 28.3

PRIMERGY RX200 S6, Intel Xeon E5506, 2.13 GHz

SPECfp_base2006 = 26.3

CPU2006 license: 19

Test date: May-2010

Test sponsor: Fujitsu

Hardware Availability: May-2010

Tested by: Fujitsu

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3 -auto-ilp32

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
-parallel

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -opt-prefetch -parallel

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: Same as 454.calculix

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.01.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.01.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = 28.3

PRIMERGY RX200 S6, Intel Xeon E5506, 2.13 GHz

SPECfp_base2006 = 26.3

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: May-2010

Hardware Availability: May-2010

Software Availability: Jan-2010

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 11:36:52 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 20 July 2010.