



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120b-2  
(Intel Xeon E5506)

SPECint®2006 = 23.8

SPECint\_base2006 = 22.1

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jul-2010

Hardware Availability: Sep-2010

Software Availability: Dec-2009

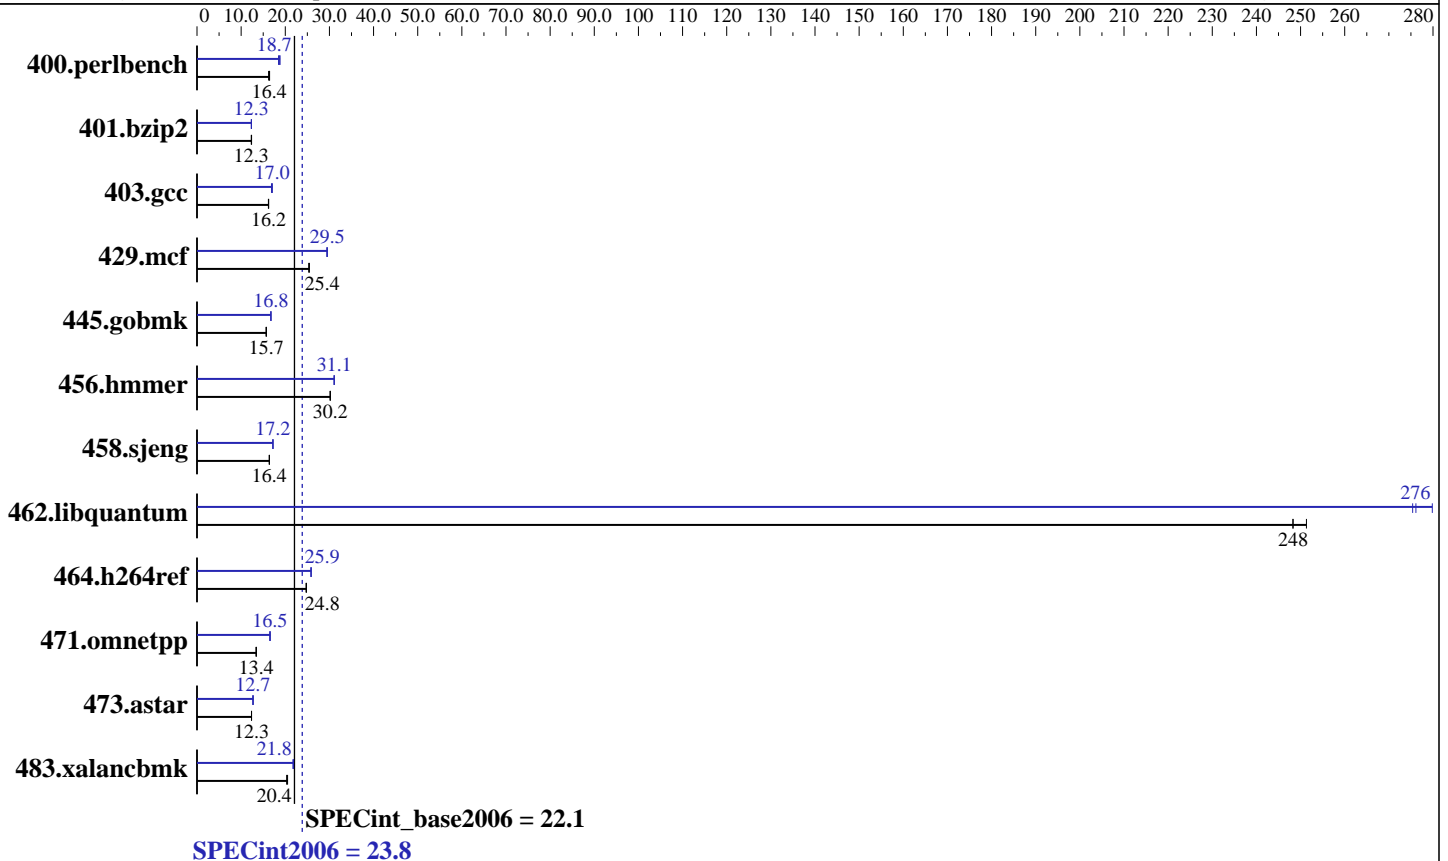

### Hardware

CPU Name: Intel Xeon E5506  
 CPU Characteristics: 2133  
 CPU MHz: 2133  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 4 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 96 GB (12 x 8 GB PC3L-10600R, 2 rank, CL9, ECC, running at 800 MHz)  
 Disk Subsystem: 1x160 GB SATA, 7200 RPM  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-default  
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: 1\_cproc\_p\_11.1.064  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120b-2  
(Intel Xeon E5506)

SPECint2006 = **23.8**

SPECint\_base2006 = **22.1**

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jul-2010

Hardware Availability: Sep-2010

Software Availability: Dec-2009

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	<b>595</b>	<b>16.4</b>	594	16.4	603	16.2	<b>523</b>	<b>18.7</b>	519	18.8	529	18.5
401.bzip2	<b>783</b>	<b>12.3</b>	780	12.4	784	12.3	<b>782</b>	<b>12.3</b>	782	12.3	785	12.3
403.gcc	496	16.2	<b>496</b>	<b>16.2</b>	498	16.2	477	16.9	<b>473</b>	<b>17.0</b>	472	17.0
429.mcf	360	25.3	<b>359</b>	<b>25.4</b>	359	25.4	309	29.5	310	29.4	<b>309</b>	<b>29.5</b>
445.gobmk	669	15.7	667	15.7	<b>669</b>	<b>15.7</b>	<b>626</b>	<b>16.8</b>	626	16.8	627	16.7
456.hammer	<b>309</b>	<b>30.2</b>	309	30.2	309	30.2	<b>300</b>	<b>31.1</b>	300	31.1	300	31.1
458.sjeng	738	16.4	<b>738</b>	<b>16.4</b>	738	16.4	703	17.2	<b>703</b>	<b>17.2</b>	703	17.2
462.libquantum	82.4	251	<b>83.4</b>	<b>248</b>	83.5	248	74.0	280	75.2	275	<b>75.0</b>	<b>276</b>
464.h264ref	895	24.7	893	24.8	<b>893</b>	<b>24.8</b>	<b>856</b>	<b>25.9</b>	856	25.9	857	25.8
471.omnetpp	464	13.5	467	13.4	<b>466</b>	<b>13.4</b>	377	16.6	379	16.5	<b>378</b>	<b>16.5</b>
473.astar	<b>568</b>	<b>12.3</b>	568	12.4	569	12.3	551	12.7	554	12.7	<b>554</b>	<b>12.7</b>
483.xalancbmk	<b>339</b>	<b>20.4</b>	336	20.5	339	20.3	<b>317</b>	<b>21.8</b>	317	21.8	315	21.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## Platform Notes

Default BIOS settings were used.

## General Notes

OMP\_NUM\_THREADS set to number of cores  
KMP\_AFFINITY set to granularity=fine,scatter  
The Express5800/R120b-1 and  
the Express5800/R120b-2 models are electronically equivalent.  
The results have been measured on the Express5800/R120b-2 model.

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/R120b-2  
(Intel Xeon E5506)

**SPECint2006 = 23.8**

**SPECint\_base2006 = 22.1**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Jul-2010

**Hardware Availability:** Sep-2010

**Software Availability:** Dec-2009

## Base Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

```

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/opt/SmartHeap\_8.1/lib64 -lsmartheap64

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32

429.mcf: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/R120b-2  
(Intel Xeon E5506)

**SPECint2006 = 23.8**

**SPECint\_base2006 = 22.1**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Jul-2010

**Hardware Availability:** Sep-2010

**Software Availability:** Dec-2009

## Peak Compiler Invocation (Continued)

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
456.hmmr: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div -static(pass 2) -prof-use(pass 2)  
-auto-ilp32 -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-alloc  
-opt-malloc-options=3 -auto-ilp32

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2  
-ipo -no-prec-div -ansi-alias

456.hmmr: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2  
-ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll4

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -parallel  
-opt-prefetch -par-schedule-static=32768 -ansi-alias

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll2 -ansi-alias

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/R120b-2  
(Intel Xeon E5506)

**SPECint2006 = 23.8**

**SPECint\_base2006 = 22.1**

**CPU2006 license:** 9006  
**Test sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test date:** Jul-2010  
**Hardware Availability:** Sep-2010  
**Software Availability:** Dec-2009

## Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/opt/SmartHeap\_8.1/lib -lsmartheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs  
-L/opt/SmartHeap\_8.1/lib64 -lsmartheap64

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch  
-Wl,-z,muldefs -L/opt/SmartHeap\_8.1/lib -lsmartheap

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100721.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100721.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 13:31:16 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 19 August 2010.