



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/GT120b  
(Intel Xeon E5503)

SPECfp®\_rate2006 = 38.9

SPECfp\_rate\_base2006 = 37.6

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jul-2010

Hardware Availability: Jun-2010

Software Availability: Dec-2009

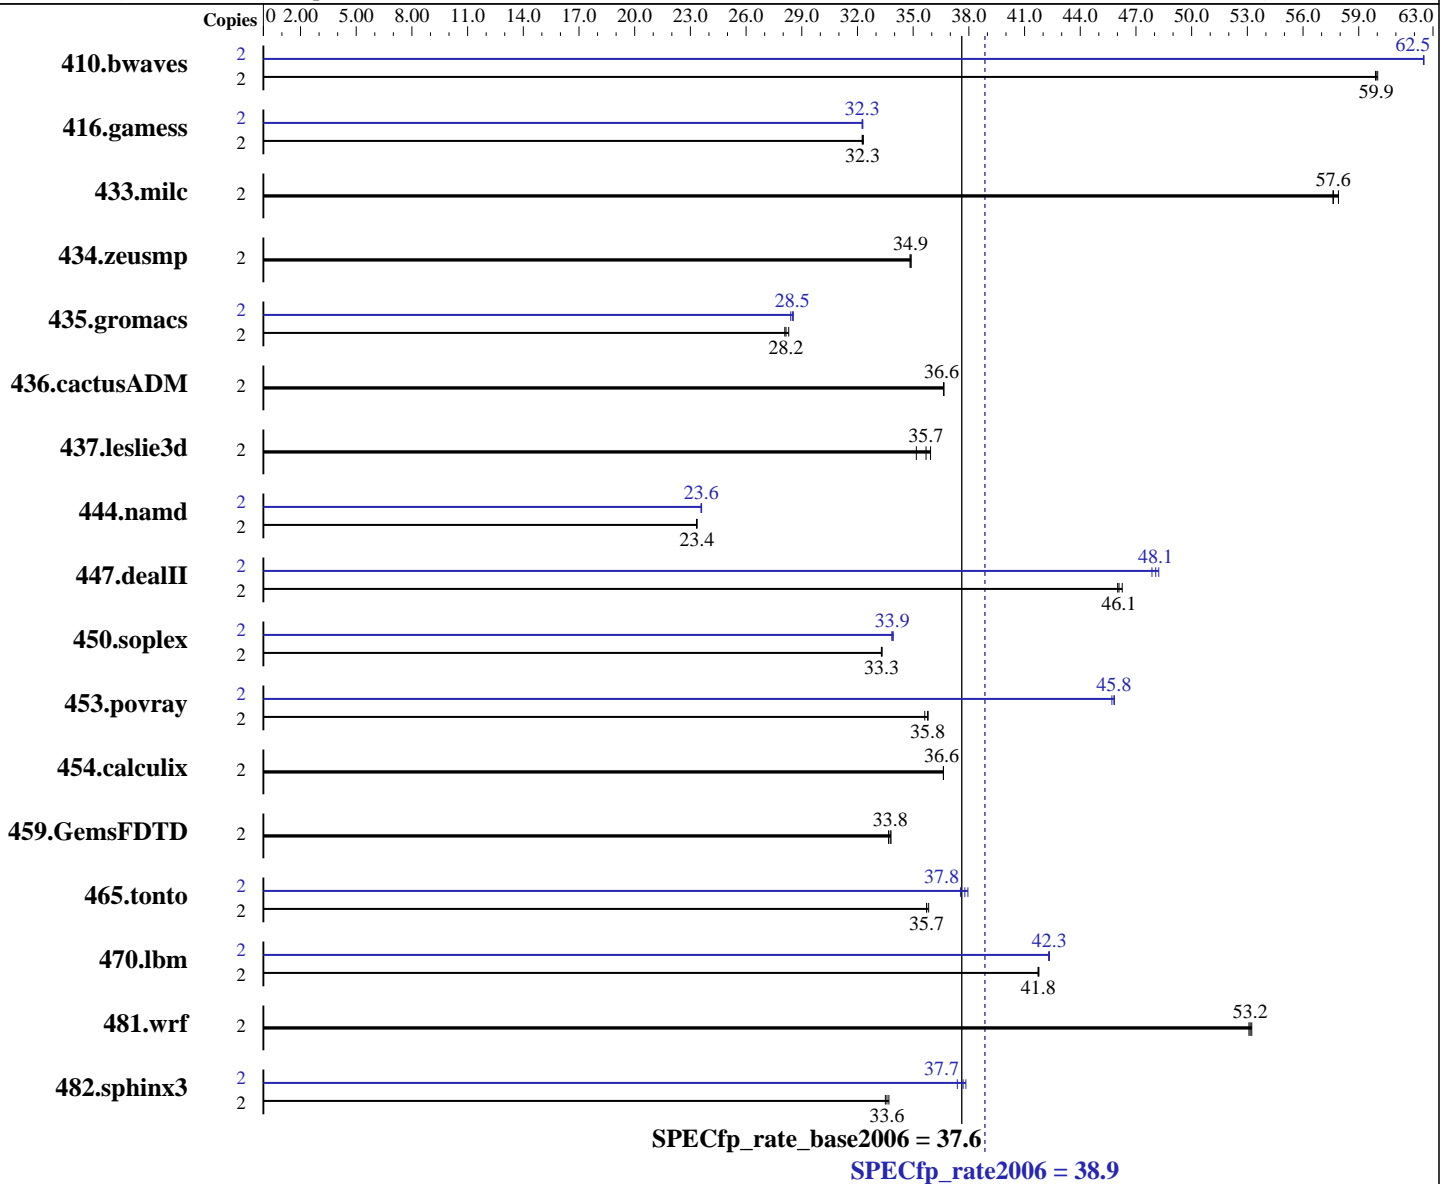

### Hardware

CPU Name: Intel Xeon E5503  
 CPU Characteristics:  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-default  
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: I\_cproc\_p\_11.1.064, I\_cprof\_p\_11.1.064  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/GT120b  
(Intel Xeon E5503)

SPECfp\_rate2006 = 38.9

SPECfp\_rate\_base2006 = 37.6

CPU2006 license: 9006  
Test sponsor: NEC Corporation  
Tested by: NEC Corporation

Test date: Jul-2010  
Hardware Availability: Jun-2010  
Software Availability: Dec-2009

L3 Cache: 4 MB I+D on chip per chip  
Other Cache: None  
Memory: 24 GB (6 x 4 GB PC3L-10600R, 2 rank, CL9, ECC, running at 800 MHz)  
Disk Subsystem: 1x160 GB SATA, 7200 RPM  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	2	<b>453</b>	<b>59.9</b>	454	59.9	453	60.0	2	435	62.5	<b>435</b>	<b>62.5</b>	435	62.5
416.gamess	2	1212	32.3	<b>1213</b>	<b>32.3</b>	1214	32.3	2	1213	32.3	<b>1214</b>	<b>32.3</b>	1214	32.3
433.milc	2	317	57.9	319	57.6	<b>319</b>	<b>57.6</b>	2	317	57.9	319	57.6	<b>319</b>	<b>57.6</b>
434.zeusmp	2	523	34.8	522	34.9	<b>522</b>	<b>34.9</b>	2	523	34.8	522	34.9	<b>522</b>	<b>34.9</b>
435.gromacs	2	<b>507</b>	<b>28.2</b>	508	28.1	505	28.3	2	<b>501</b>	<b>28.5</b>	500	28.5	503	28.4
436.cactusADM	2	652	36.6	<b>652</b>	<b>36.6</b>	652	36.7	2	652	36.6	<b>652</b>	<b>36.6</b>	652	36.7
437.leslie3d	2	535	35.2	523	35.9	<b>527</b>	<b>35.7</b>	2	535	35.2	523	35.9	<b>527</b>	<b>35.7</b>
444.namd	2	687	23.4	688	23.3	<b>687</b>	<b>23.4</b>	2	679	23.6	<b>680</b>	<b>23.6</b>	680	23.6
447.dealII	2	497	46.0	495	46.3	<b>496</b>	<b>46.1</b>	2	474	48.2	<b>476</b>	<b>48.1</b>	478	47.9
450.soplex	2	501	33.3	<b>501</b>	<b>33.3</b>	501	33.3	2	493	33.9	<b>492</b>	<b>33.9</b>	492	33.9
453.povray	2	<b>297</b>	<b>35.8</b>	299	35.6	297	35.8	2	232	45.8	233	45.7	<b>232</b>	<b>45.8</b>
454.calculix	2	450	36.6	<b>450</b>	<b>36.6</b>	450	36.6	2	450	36.6	<b>450</b>	<b>36.6</b>	450	36.6
459.GemsFDTD	2	630	33.7	628	33.8	<b>629</b>	<b>33.8</b>	2	630	33.7	628	33.8	<b>629</b>	<b>33.8</b>
465.tonto	2	551	35.7	<b>551</b>	<b>35.7</b>	549	35.8	2	<b>521</b>	<b>37.8</b>	524	37.5	519	37.9
470.lbm	2	658	41.8	<b>658</b>	<b>41.8</b>	659	41.7	2	<b>649</b>	<b>42.3</b>	650	42.3	649	42.3
481.wrf	2	420	53.2	<b>420</b>	<b>53.2</b>	421	53.1	2	420	53.2	<b>420</b>	<b>53.2</b>	421	53.1
482.sphinx3	2	<b>1161</b>	<b>33.6</b>	1164	33.5	1157	33.7	2	1043	37.4	1030	37.8	<b>1034</b>	<b>37.7</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## Platform Notes

Default BIOS settings were used.



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/GT120b  
(Intel Xeon E5503)

**SPECfp\_rate2006 = 38.9**

**SPECfp\_rate\_base2006 = 37.6**

**CPU2006 license:** 9006  
**Test sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test date:** Jul-2010  
**Hardware Availability:** Jun-2010  
**Software Availability:** Dec-2009

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:  
-xSSE4.2 -ipo -O3 -no-prec-div -static



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/GT120b  
(Intel Xeon E5503)

SPECfp\_rate2006 = 38.9

SPECfp\_rate\_base2006 = 37.6

**CPU2006 license:** 9006  
**Test sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test date:** Jul-2010  
**Hardware Availability:** Jun-2010  
**Software Availability:** Dec-2009

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3 -ansi-alias -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/GT120b  
(Intel Xeon E5503)

**SPECfp\_rate2006 = 38.9**

**SPECfp\_rate\_base2006 = 37.6**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Jul-2010

**Hardware Availability:** Jun-2010

**Software Availability:** Dec-2009

## Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealIII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/GT120b  
(Intel Xeon E5503)

**SPECfp\_rate2006 = 38.9**

**SPECfp\_rate\_base2006 = 37.6**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Jul-2010

**Hardware Availability:** Jun-2010

**Software Availability:** Dec-2009

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100721.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100721.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 12:20:33 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 31 August 2010.