



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECint<sup>®</sup>\_rate2006 = 578**

**IBM Power 730 Express (3.55 GHz, 16 core, SLES)**

**SPECint\_rate\_base2006 = 515**

**CPU2006 license:** 11


**Test date:** Jul-2010

**Test sponsor:** IBM Corporation

**Hardware Availability:** Sep-2010

**Tested by:** IBM Corporation

**Software Availability:** Aug-2010

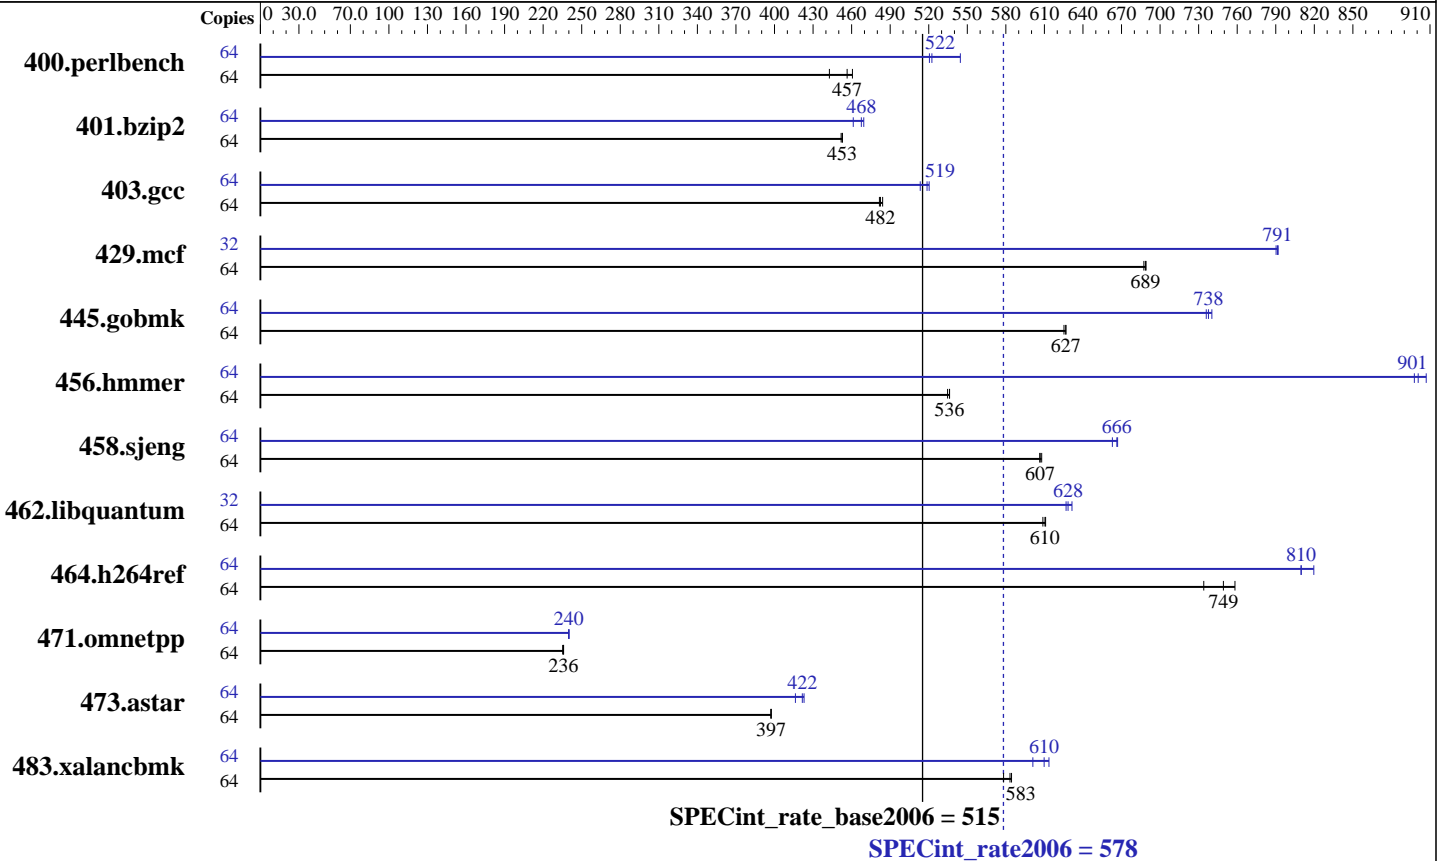

## Hardware

**CPU Name:** POWER7  
**CPU Characteristics:** Intelligent Energy Optimization enabled, up to 3.86 GHz  
**CPU MHz:** 3556  
**FPU:** Integrated  
**CPU(s) enabled:** 16 cores, 2 chips, 8 cores/chip, 4 threads/core  
**CPU(s) orderable:** 16 cores  
**Primary Cache:** 32 KB I + 32 KB D on chip per core  
**Secondary Cache:** 256 KB I+D on chip per core  
**L3 Cache:** 4 MB I+D on chip per core  
**Other Cache:** None  
**Memory:** 128 GB (16x8 GB) DDR3 1066 MHz  
**Disk Subsystem:** 2x146.8 GB SAS SFF 15K RPM  
**Other Hardware:** None

## Software

**Operating System:** SUSE Linux Enterprise Server 11 SP1 (ppc64), Kernel 2.6.32.12-0.7-ppc64  
**Compiler:** IBM XL C/C++ for Linux, V11.1  
**Auto Parallel:** No  
**File System:** ext3  
**System State:** Run level 3 (multi-user)  
**Base Pointers:** 32-bit  
**Peak Pointers:** 32/64-bit  
**Other Software:** -Post-Link Optimization for Linux on POWER, Version 5.5.0-3  
 -MicroQuill SmartHeap 9



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 578

IBM Power 730 Express (3.55 GHz, 16 core, SLES)

SPECint\_rate\_base2006 = 515

CPU2006 license: 11

Test date: Jul-2010

Test sponsor: IBM Corporation

Hardware Availability: Sep-2010

Tested by: IBM Corporation

Software Availability: Aug-2010

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	1357	461	1412	443	<b>1370</b>	<b>457</b>	64	1201	521	<b>1197</b>	<b>522</b>	1148	545
401.bzip2	64	<b>1364</b>	<b>453</b>	1364	453	1367	452	64	1339	461	<b>1321</b>	<b>468</b>	1316	469
403.gcc	64	1064	484	1070	482	<b>1068</b>	<b>482</b>	64	<b>993</b>	<b>519</b>	1004	513	990	520
429.mcf	64	<b>848</b>	<b>689</b>	847	689	849	687	32	369	790	<b>369</b>	<b>791</b>	369	792
445.gobmk	64	1074	625	1071	627	<b>1071</b>	<b>627</b>	64	<b>910</b>	<b>738</b>	907	740	912	736
456.hammer	64	1117	535	1114	536	<b>1114</b>	<b>536</b>	64	658	907	665	898	<b>663</b>	<b>901</b>
458.sjeng	64	1277	606	<b>1276</b>	<b>607</b>	1274	608	64	<b>1162</b>	<b>666</b>	1161	667	1168	663
462.libquantum	64	2178	609	2171	611	<b>2172</b>	<b>610</b>	32	1058	627	1050	631	<b>1055</b>	<b>628</b>
464.h264ref	64	1930	734	<b>1890</b>	<b>749</b>	1868	758	64	1728	820	<b>1749</b>	<b>810</b>	1749	810
471.omnetpp	64	1701	235	<b>1696</b>	<b>236</b>	1696	236	64	1666	240	1668	240	<b>1667</b>	<b>240</b>
473.astar	64	<b>1131</b>	<b>397</b>	1130	397	1131	397	64	<b>1066</b>	<b>422</b>	1079	416	1062	423
483.xalanbmk	64	<b>757</b>	<b>583</b>	764	578	756	584	64	<b>724</b>	<b>610</b>	735	601	720	614

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Peak Tuning Notes

```

fdpr binary optimization tool used for:
400.perlbench
  with options -O4 -omullX for optimization phase,
  and -imullX for instrumentation phase
401.bzip2
  with options -O4 -vrox
403.gcc
  with options -O4 -nodp -rtb
429.mcf 445.gobmk 458.sjeng 473.astar
  with options -O3
456.hammer
  with options -O4 -nodp -m power7
462.libquantum
  with options -O4 -vrox -nodp
464.h264ref
  with options -O4 -vrox -nodp -rtb
471.omnetpp
  with options -O3 -lu -1 -nodp -sdp 9
483.xalanbmk
  with options -O3 -m power7

```

## Submit Notes

The config file option 'submit' was used.  
Benchmarks bound to a processor using numactl on the submit command.



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 578

IBM Power 730 Express (3.55 GHz, 16 core, SLES)

SPECint\_rate\_base2006 = 515

CPU2006 license: 11

Test date: Jul-2010

Test sponsor: IBM Corporation

Hardware Availability: Sep-2010

Tested by: IBM Corporation

Software Availability: Aug-2010

## Operating System Notes

```
ulimit -s (stack) set to 1048576.  
Large pages reserved as follows by root user:  
echo 3520 > /proc/sys/vm/nr_hugepages  
The following environment variables were set before the runspec command:  
export XLFRTIOPTS=intrinthds=1  
export HUGETLB_VERBOSE=0  
export HUGETLB_MORECORE=yes  
export HUGETLB_ELFMAP=RW
```

## Base Compiler Invocation

```
C benchmarks:  
xlc -qlanglvl=extc99  
  
C++ benchmarks:  
xlC
```

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_PPC  
462.libquantum: -DSPEC_CPU_LINUX  
464.h264ref: -qchars=signed  
483.xalancbmk: -DSPEC_CPU_LINUX
```

## Base Optimization Flags

```
C benchmarks:  
-O5 -qarch=pwr7 -qtune=pwr7 -qalias=noansi -qalloca -lhugetlbfs  
  
C++ benchmarks:  
-O5 -qarch=pwr7 -qtune=pwr7 -qrtti -lsmartheap
```

## Base Other Flags

```
C benchmarks:  
-qipa=threads  
  
C++ benchmarks:  
-qipa=threads
```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 578

IBM Power 730 Express (3.55 GHz, 16 core, SLES)

SPECint\_rate\_base2006 = 515

CPU2006 license: 11

Test date: Jul-2010

Test sponsor: IBM Corporation

Hardware Availability: Sep-2010

Tested by: IBM Corporation

Software Availability: Aug-2010

## Peak Compiler Invocation

C benchmarks:

xlc -qlanglvl=extc99

C++ benchmarks:

xlC

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_PPC  
462.libquantum: -DSPEC\_CPU\_LINUX  
464.h264ref: -qchars=signed  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qarch=pwr7  
-qtune=pwr7 -qalias=noansi -qipa=level=2 -lsmartheap

401.bzip2: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O3 -qarch=pwr7  
-qtune=pwr7 -lhugetlbfs

403.gcc: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qarch=pwr7  
-qtune=pwr7 -qalloca -lhugetlbfs

429.mcf: -Wl,-q -O5 -qarch=pwr7 -qtune=pwr7 -lhugetlbfs

445.gobmk: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qarch=pwr7  
-qtune=pwr7 -lhugetlbfs

456.hmmer: -Wl,-q -O5 -qarch=pwr7 -qtune=pwr7 -qsimd  
-qassert=refalign -qipa=inline=threshold=2888  
-qipa=inline=limit=11880 -lhugetlbfs

458.sjeng: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qarch=pwr7  
-qtune=pwr7 -lhugetlbfs

462.libquantum: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qarch=pwr7  
-qtune=pwr7 -q64 -lhugetlbfs

464.h264ref: Same as 458.sjeng

C++ benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 578

IBM Power 730 Express (3.55 GHz, 16 core, SLES)

SPECint\_rate\_base2006 = 515

CPU2006 license: 11

Test date: Jul-2010

Test sponsor: IBM Corporation

Hardware Availability: Sep-2010

Tested by: IBM Corporation

Software Availability: Aug-2010

## Peak Optimization Flags (Continued)

471.omnetpp: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qarch=pwr7  
-qtune=pwr7 -qrtti -lsmartheap

473.astar: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qarch=pwr7  
-qtune=pwr7 -lhugetlbfs -lsmartheap

483.xalancbmk: -Wl,-q -O5 -qarch=pwr7 -qtune=pwr7 -lsmartheap

## Peak Other Flags

C benchmarks:  
-qipa=threads

C++ benchmarks:  
-qipa=threads

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-Linux-XL.20100901.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/IBM-Linux-XL.20100901.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 12:21:26 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 31 August 2010.