



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec


SPECint[®]_rate2006 = 193

Servidor Itautec MX203+ (Intel Xeon X5680)

SPECint_rate_base2006 = 181

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Aug-2010
Hardware Availability: Apr-2010
Software Availability: Apr-2010

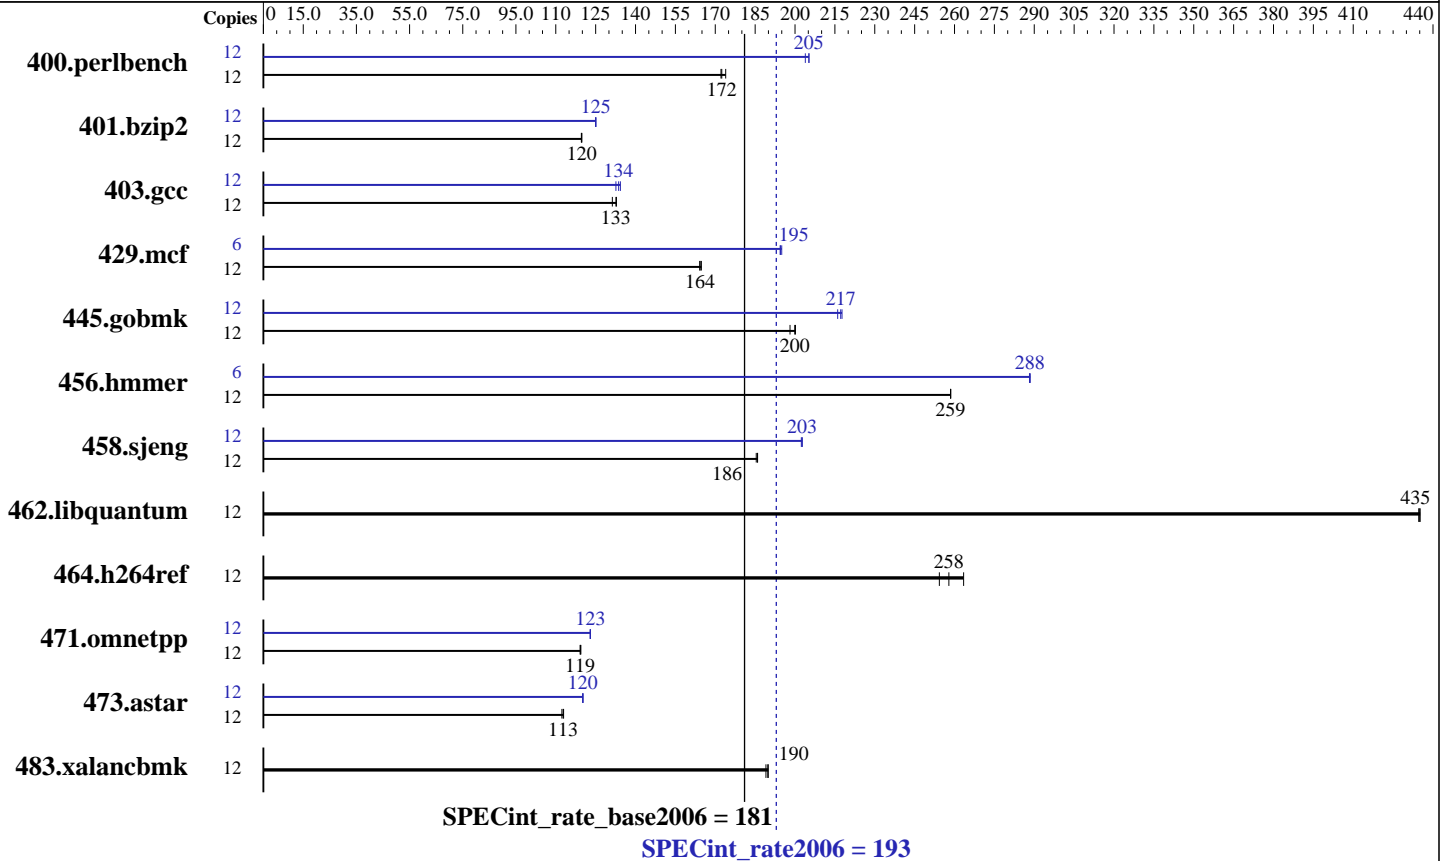

Hardware

CPU Name: Intel Xeon X5680
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz
 CPU MHz: 3333
 FPU: Integrated
 CPU(s) enabled: 6 cores, 1 chip, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1, 2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 24 GB (6 x 4GB, DDR3-1333, Dual Rank, CL 9, ECC)
 Disk Subsystem: 1 x 160 GB SATA-2, 7200 RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-smp
 Compiler: Intel C++ Professional Compiler 11.1 for Linux Build 20100414 Package ID: l_cproc_p_11.1.072
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint_rate2006 = 193

Servidor Itaotec MX203+ (Intel Xeon X5680)

SPECint_rate_base2006 = 181

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Aug-2010
Hardware Availability: Apr-2010
Software Availability: Apr-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	12	674	174	681	172	680	172	12	571	205	571	205	575	204
401.bzip2	12	968	120	967	120	967	120	12	926	125	926	125	927	125
403.gcc	12	736	131	728	133	727	133	12	719	134	728	133	723	134
429.mcf	12	666	164	664	165	667	164	6	281	195	281	194	281	195
445.gobmk	12	635	198	629	200	630	200	12	580	217	578	218	583	216
456.hammer	12	433	259	433	258	433	259	6	194	288	194	288	194	288
458.sjeng	12	781	186	781	186	783	185	12	718	202	717	203	716	203
462.libquantum	12	571	435	572	435	572	435	12	571	435	572	435	572	435
464.h264ref	12	1030	258	1044	254	1008	263	12	1030	258	1044	254	1008	263
471.omnetpp	12	629	119	628	119	629	119	12	610	123	610	123	610	123
473.astar	12	750	112	747	113	746	113	12	701	120	701	120	701	120
483.xalancbmk	12	438	189	436	190	436	190	12	438	189	436	190	436	190

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.

General Notes

This result was measured on the Servidor Itaotec MX223+.
The Servidor Itaotec MX223+, the Servidor Itaotec MX224 and the Servidor Itaotec MX203+ are electronically equivalent.

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint_rate2006 = 193

Servidor Itaotec MX203+ (Intel Xeon X5680)

SPECint_rate_base2006 = 181

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Aug-2010
Hardware Availability: Apr-2010
Software Availability: Apr-2010

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/home/richard/sh/SmartHeap_8.1/lib -lsmarheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32
401.bzip2: icc -m64
456.hmmer: icc -m64
458.sjeng: icc -m64
C++ benchmarks (except as noted below):
icpc -m32
473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint_rate2006 = 193

Servidor Itaotec MX203+ (Intel Xeon X5680)

SPECint_rate_base2006 = 181

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Aug-2010
Hardware Availability: Apr-2010
Software Availability: Apr-2010

Peak Portability Flags (Continued)

462.libquantum: -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
-ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/home/richard/sh/SmartHeap_8.1/lib -lsmarheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs
-L/home/richard/sh/SmartHeap_8/lib -lsmarheap64

483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint_rate2006 = 193

Servidor Itautec MX203+ (Intel Xeon X5680)

SPECint_rate_base2006 = 181

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Aug-2010
Hardware Availability: Apr-2010
Software Availability: Apr-2010

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Itautec-Intel-ic11.1-linux64-revE.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Itautec-Intel-ic11.1-linux64-revE.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 10:11:02 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 September 2010.