



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation
SPARC Enterprise M5000

SPECfp®_rate2006 = 278

SPECfp_rate_base2006 = 250

CPU2006 license: 6


Test sponsor: Oracle Corporation

Tested by: Oracle Corporation

Test date: Nov-2010

Hardware Availability: Dec-2010

Software Availability: Sep-2010

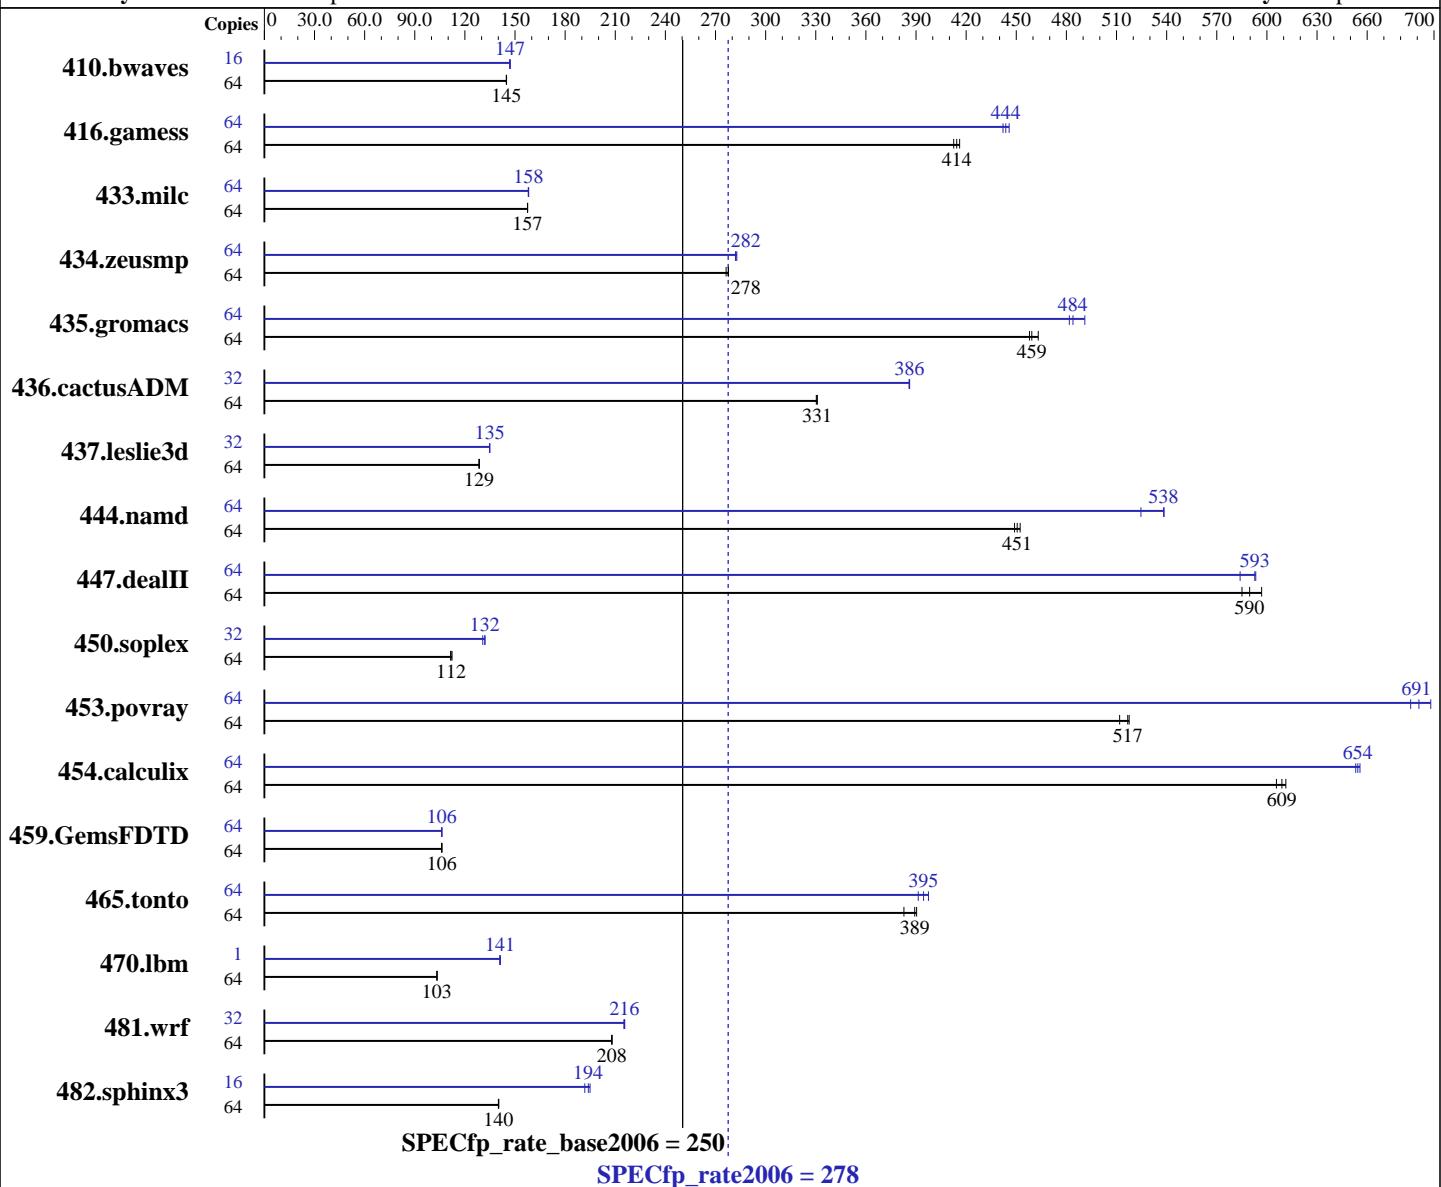

Hardware

CPU Name: SPARC64 VII+
CPU Characteristics:
CPU MHz:
FPU:
CPU(s) enabled: 32 cores, 8 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable: 1 to 4 CPUMs; each CPUM contains 2 CPU chips
Primary Cache: 64 KB I + 64 KB D on chip per core
Secondary Cache: 11 MB I+D on chip per chip

Software

Operating System: Oracle Solaris 10 9/10
Compiler: Oracle Solaris Studio 12.2
Auto Parallel: Yes
File System: zfs with gzip compression
System State: Default
Base Pointers: 32-bit
Peak Pointers: 32-bit
Other Software: None

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation
SPARC Enterprise M5000

SPECfp_rate2006 = 278

SPECfp_rate_base2006 = 250

CPU2006 license: 6

Test date: Nov-2010

Test sponsor: Oracle Corporation

Hardware Availability: Dec-2010

Tested by: Oracle Corporation

Software Availability: Sep-2010

L3 Cache: None
Other Cache: None
Memory: 128 GB (64 x 2 GB, 8-way interleaved)
Disk Subsystem: 134 GB on 2 x 72 GB 10K RPM SAS disks
Other Hardware: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	64	6008	145	6002	145	6001	145	16	1478	147	1478	147	1481	147
416.gamess	64	3037	413	3024	414	3012	416	64	2835	442	2824	444	2811	446
433.milc	64	3731	157	3731	157	3728	158	64	3720	158	3716	158	3715	158
434.zeusmp	64	2097	278	2097	278	2108	276	64	2066	282	2064	282	2060	283
435.gromacs	64	987	463	995	459	998	458	64	931	491	944	484	949	482
436.cactusADM	64	2311	331	2315	330	2312	331	32	990	386	990	386	991	386
437.leslie3d	64	4678	129	4681	129	4681	129	32	2230	135	2230	135	2232	135
444.namd	64	1139	451	1143	449	1135	452	64	953	538	954	538	978	525
447.dealII	64	1251	585	1242	590	1227	597	64	1254	584	1235	593	1234	593
450.soplex	64	4789	111	4779	112	4753	112	32	2042	131	2021	132	2024	132
453.povray	64	665	512	659	517	658	518	64	493	691	488	698	496	686
454.calculix	64	872	606	864	611	867	609	64	808	653	805	656	807	654
459.GemsFDTD	64	6397	106	6395	106	6394	106	64	6393	106	6394	106	6396	106
465.tonto	64	1618	389	1645	383	1613	390	64	1609	391	1596	395	1585	397
470.lbm	64	8512	103	8512	103	8513	103	1	97.4	141	97.6	141	97.3	141
481.wrf	64	3436	208	3440	208	3437	208	32	1657	216	1659	216	1661	215
482.sphinx3	64	8890	140	8903	140	8906	140	16	1608	194	1600	195	1626	192

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

Oracle Solaris Studio 12.2 is distributed with mandatory OS patches
118683-05 119963-20 120753-08

Oracle Solaris Studio 12.2 and patches are available at
<http://oracle.com/goto/solarisstudio>

The Apache C++ Standard Library V4.2.1 was installed from
<http://stdcxx.apache.org/download.html> using:

```
alias gmake=specmake
gmake BUILDTYPE=8d CONFIG=sunpro.config
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation
SPARC Enterprise M5000

SPECfp_rate2006 = 278
SPECfp_rate_base2006 = 250

CPU2006 license: 6

Test date: Nov-2010

Test sponsor: Oracle Corporation

Hardware Availability: Dec-2010

Tested by: Oracle Corporation

Software Availability: Sep-2010

Submit Notes

Processes were assigned to specific processors using 'pbind' commands. The config file option 'submit' was used, along with a list of processors in the 'BIND' variable, to generate the pbind commands. (For details, please see the config file.)

Operating System Notes

ulimit -s 131072 was used to limit the space consumed by the stack (and therefore make more space available to the heap).

```
/etc/system parameters
autooup=600
    Causes pages older than the listed number of seconds to
    be written by fsflush.
tune_t_fsflushr=10
    Controls how many seconds elapse between runs of the
    page flush daemon, fsflush.
zfs:zfs_arc_min=0x10000000
zfs:zfs_arc_max=0x380000000
    Limits the consumption of memory by the zfs file system
    cache to 256 MB to 14 GB . (The arc_max sets the maximum
    cache size; arc_min sets the minimum.)
kernel_cage_enable=0
    Allows the kernel to use memory in any locality group.
    In particular, allows ZFS file caches to be located on
    any memory board.
lpg_alloc_prefer=1
    Indicates that extra effort should be taken to ensure
    that pages are created in the nearby lgroup (NUMA location).
The "webconsole" service was turned off using
    svcadm disable webconsole
The system had 52 GB of swap space.
```

Platform Notes

Memory is 8-way interleaved by filling all slots with the same capacity DIMMs.

This result is measured on a SPARC Enterprise M5000 server from Oracle. The SPARC Enterprise M5000 server from Oracle and from Fujitsu are electrically equivalent.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation
SPARC Enterprise M5000

SPECfp_rate2006 = 278

SPECfp_rate_base2006 = 250

CPU2006 license: 6

Test date: Nov-2010

Test sponsor: Oracle Corporation

Hardware Availability: Dec-2010

Tested by: Oracle Corporation

Software Availability: Sep-2010

General Notes

Environment variables set by runspec before the start of the run:

```
OMP_NUM_THREADS = "64"  
SUNW_MP_PROCBIND = "63 62 61 60 59 58 57 56 55 54 53 52 51 50 49  
48 47 46 45 44 43 42 41 40 39 38 37 36 35 34 33 32 31 30 29 28  
27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5  
4 3 2 1 0"  
SUNW_MP_THR_IDLE = "SPIN"
```

```
447.dealII (peak): "apache_stdcxx_4_2_1" src.alt was used.  
447.dealII (base): "apache_stdcxx_4_2_1" src.alt was used.
```

Base Compiler Invocation

C benchmarks:

```
cc
```

C++ benchmarks:

```
CC
```

Fortran benchmarks:

```
f90
```

Benchmarks using both Fortran and C:

```
cc f90
```

Base Optimization Flags

C benchmarks:

```
-fast -fma=fused -xipo=2 -xpagesize=4M -xalias_level=std  
-xprefetch_auto_type=indirect_array_access -xprefetch_level=3  
-fsimple=1
```

C++ benchmarks:

```
-fast -fma=fused -xipo=2 -xpagesize=4M -xalias_level=compatible  
-xdepend -xprefetch=latx:0.5 -library=no%Cstd  
-I/export/home/apache/stdcxx-4.2.1/include  
-I/export/home/apache/stdcxx-4.2.1/build/include  
-L/export/home/apache/stdcxx-4.2.1/build/lib  
-R/export/home/apache/stdcxx-4.2.1/build/lib -lstd8d
```

Fortran benchmarks:

```
-fast -fma=fused -xipo=2 -xpagesize=4M
```

Benchmarks using both Fortran and C:

```
-fast(cc) -fast(f90) -fma=fused -xipo=2 -xpagesize=4M  
-xalias_level=std -xprefetch_auto_type=indirect_array_access  
-xprefetch_level=3 -fsimple=1
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation
SPARC Enterprise M5000

SPECfp_rate2006 = 278

SPECfp_rate_base2006 = 250

CPU2006 license: 6

Test sponsor: Oracle Corporation

Tested by: Oracle Corporation

Test date: Nov-2010

Hardware Availability: Dec-2010

Software Availability: Sep-2010

Base Other Flags

C benchmarks:

-xjobs=32 -V -#

C++ benchmarks:

-xjobs=32 -verbose=diags,version

Fortran benchmarks:

-xjobs=32 -V -v

Benchmarks using both Fortran and C:

-xjobs=32 -V -# -v

Peak Compiler Invocation

C benchmarks:

cc

C++ benchmarks:

CC

Fortran benchmarks:

f90

Benchmarks using both Fortran and C:

cc f90

Peak Optimization Flags

C benchmarks:

433.milc: -fast -xpagesize=4M -fma=fused -xipo=2 -xprefetch_level=2
-xprefetch_auto_type=indirect_array_access -xalias_level=std
-fsimple=1 -W2,-Ainline:rs=400

470.lbm: -fast -xpagesize=4M -fma=fused -xipo=2 -xprefetch_level=3
-xvector -xarch=generic -xautopar -xreduction

482.sphinx3: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-fma=fused -xipo=2 -xinline= -xalias_level=strong
-xprefetch_level=2 -lfast -ll2amm

C++ benchmarks:

444.namd: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xalias_level=any -xdepend -library=stlport4 -fma=fused

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation
SPARC Enterprise M5000

SPECfp_rate2006 = 278
SPECfp_rate_base2006 = 250

CPU2006 license: 6

Test sponsor: Oracle Corporation

Tested by: Oracle Corporation

Test date: Nov-2010
Hardware Availability: Dec-2010
Software Availability: Sep-2010

Peak Optimization Flags (Continued)

444.namd (continued):

-xipo=2 -xchip=generic -xunroll=2

447.dealII: -fast -xpagesize=4M -xalias_level=compatible -xdepend
-library=no%Cstd -I/export/home/apache/stdcxx-4.2.1/include
-I/export/home/apache/stdcxx-4.2.1/build/include -fma=fused
-xipo=2 -xprefetch=latx:0.5
-L/export/home/apache/stdcxx-4.2.1/build/lib
-R/export/home/apache/stdcxx-4.2.1/build/lib -lstd8d

450.soplex: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpatesize=4M
-xalias_level=compatible -xdepend -library=stlport4
-fma=fused -xipo=2 -xrestrict -xprefetch=no -ll2amm

453.povray: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpatesize=4M
-xalias_level=compatible -xdepend -fma=fused -xipo=2
-xlinkopt=2 -xprefetch=no -xunroll=4 -xO4 -lfast

Fortran benchmarks:

410.bwaves: -fast -xpatesize=4M -fma=fused -xipo=2

416.gamess: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpatesize=4M
-fma=fused -xipo=2 -xprefetch=no%auto -xO3

434.zeusmp: -fast -xpatesize=4M -fma=fused -xipo=2 -xprefetch_level=1
-ll2amm -xunroll=5

437.leslie3d: -fast -xpatesize=4M -M /usr/lib/ld/map.bssalign
-xprefetch=no

459.GemsFDTD: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpatesize=4M
-fma=fused

465.tonto: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpatesize=4M
-xipo=2 -xprefetch=no -lfast -ll2amm

Benchmarks using both Fortran and C:

435.gromacs: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
-xpatesize=4M -fma=fused -xtarget=generic -xinline=
-fsimple=0 -xlinkopt -xvector -xdepend

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation
SPARC Enterprise M5000

SPECfp_rate2006 = 278
SPECfp_rate_base2006 = 250

CPU2006 license: 6

Test sponsor: Oracle Corporation

Tested by: Oracle Corporation

Test date: Nov-2010
Hardware Availability: Dec-2010
Software Availability: Sep-2010

Peak Optimization Flags (Continued)

436.cactusADM: -fast(cc) -fast(f90) -xpagesize=4M -fma=fused -xipo=2

454.calculix: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
-xpagesize=4M -fma=fused -xipo=2 -xvector
-xprefetch=latx:3 -xalias_level=std

481.wrf: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
-xpagesize=4M -fma=fused -xipo=2 -xprefetch_level=3
-xprefetch_auto_type=indirect_array_access -ll2amm

Peak Other Flags

C benchmarks:

-xjobs=32 -V -#

C++ benchmarks:

-xjobs=32 -verbose=diags,version

Fortran benchmarks:

-xjobs=32 -V -v

Benchmarks using both Fortran and C:

-xjobs=32 -V -# -v

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.2-SPARC.20101221.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.2-SPARC.20101221.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 13:51:25 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 21 December 2010.