



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation  
SPARC Enterprise M8000

**SPECint®2006 = 15.8**  
**SPECint\_base2006 = 14.2**

CPU2006 license: 6


Test sponsor: Oracle Corporation

Tested by: Fujitsu

**Test date:** Oct-2010

**Hardware Availability:** Dec-2010

**Software Availability:** Sep-2010

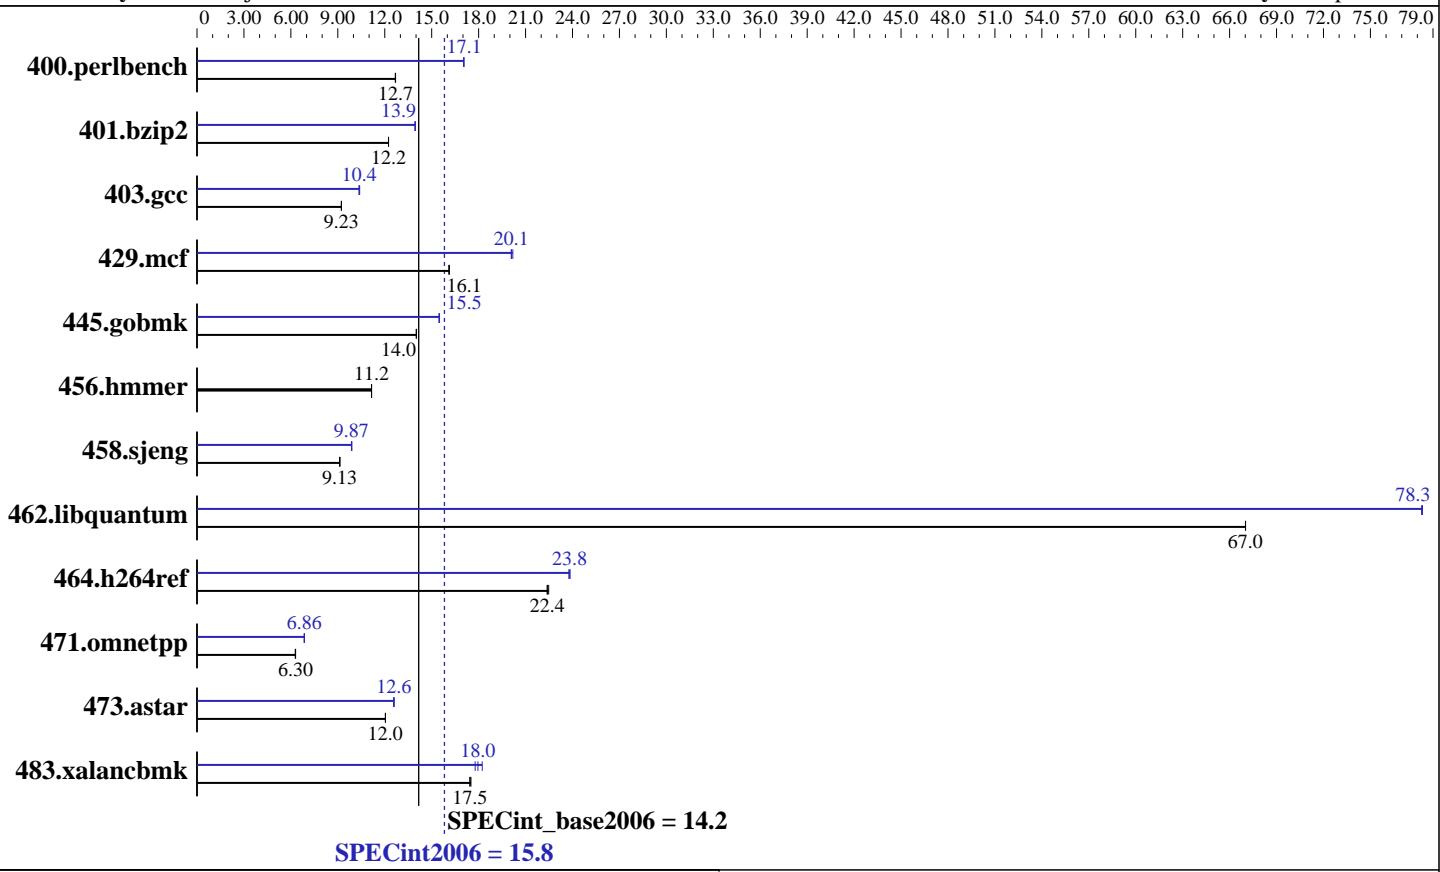

## Hardware

CPU Name: SPARC64 VII+  
CPU Characteristics:  
CPU MHz: 3000  
FPU: Integrated  
CPU(s) enabled: 64 cores, 16 chips, 4 cores/chip, 2 threads/core  
CPU(s) orderable: 1 to 4 CMUs; each CMU contains 2 or 4 CPU chips  
Primary Cache: 64 KB I + 64 KB D on chip per core  
Secondary Cache: 12 MB I+D on chip per chip  
L3 Cache: None  
Other Cache: None  
Memory: 512 GB (128 x 4 GB, 8-way interleaved)  
Disk Subsystem: 4 x 300 GB 10,000 RPM SAS  
Other Hardware: None

## Software

Operating System: Oracle Solaris 10 9/10  
Compiler: Oracle Solaris Studio 12.2  
Auto Parallel: No  
File System: zfs  
System State: Default  
Base Pointers: 32-bit  
Peak Pointers: 32-bit  
Other Software: None



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation  
SPARC Enterprise M8000

**SPECint2006 = 15.8**  
**SPECint\_base2006 = 14.2**

CPU2006 license: 6

Test sponsor: Oracle Corporation

Tested by: Fujitsu

Test date: Oct-2010

Hardware Availability: Dec-2010

Software Availability: Sep-2010

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	<b>770</b>	<b>12.7</b>	771	12.7	770	12.7	<b>573</b>	<b>17.1</b>	573	17.0	<b>573</b>	<b>17.1</b>
401.bzip2	788	12.2	<b>788</b>	<b>12.2</b>	788	12.2	<b>692</b>	<b>13.9</b>	692	13.9	692	13.9
403.gcc	872	9.23	<b>872</b>	<b>9.23</b>	872	9.23	<b>777</b>	<b>10.4</b>	774	10.4	777	10.4
429.mcf	<b>566</b>	<b>16.1</b>	566	16.1	566	16.1	<b>452</b>	<b>20.2</b>	454	20.1	<b>454</b>	<b>20.1</b>
445.gobmk	<b>748</b>	<b>14.0</b>	748	14.0	748	14.0	<b>678</b>	<b>15.5</b>	678	15.5	678	15.5
456.hmmer	<b>836</b>	<b>11.2</b>	836	11.2	836	11.2	<b>836</b>	<b>11.2</b>	836	11.2	836	11.2
458.sjeng	1327	9.12	1326	9.13	<b>1326</b>	<b>9.13</b>	1226	9.87	<b>1225</b>	<b>9.87</b>	1222	9.90
462.libquantum	309	67.0	309	67.0	<b>309</b>	<b>67.0</b>	<b>265</b>	<b>78.3</b>	265	78.3	265	78.3
464.h264ref	989	22.4	<b>988</b>	<b>22.4</b>	985	22.5	<b>929</b>	<b>23.8</b>	931	23.8	928	23.8
471.omnetpp	992	6.30	<b>992</b>	<b>6.30</b>	995	6.28	<b>911</b>	<b>6.86</b>	<b>911</b>	<b>6.86</b>	911	6.86
473.astar	583	12.0	<b>583</b>	<b>12.0</b>	583	12.0	<b>559</b>	<b>12.6</b>	557	12.6	<b>557</b>	<b>12.6</b>
483.xalancbmk	<b>395</b>	<b>17.5</b>	396	17.4	394	17.5	<b>388</b>	<b>17.8</b>	<b>384</b>	<b>18.0</b>	378	18.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Invocation Notes

Oracle Solaris Studio 12.2 is distributed with mandatory OS patches  
118683-05 119963-20 120753-08

Oracle Solaris Studio 12.2 and patches are available at  
<http://oracle.com/goto/solarisstudio>

## Submit Notes

The config file option 'submit' was used. Processes were assigned to specific processors using 'pbind' commands. The list of processors to use was provided in the 'BIND' variable, to generate the pbind commands.  
(For details, please see the config file.)

## Operating System Notes

Shell Environments:

ulimit -s 131072 was used to limit the space consumed by the stack.(making more space available for the heap)

System Tunables (/etc/system parameters):

```
autoup=600
Causes pages older than the listed number of seconds to be written by fsflush.
zfs:zfs_arc_max = 0x10000000
Control the amount of memory used by ZFS for caching
Continued on next page
```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation  
SPARC Enterprise M8000

**SPECint2006 = 15.8**  
**SPECint\_base2006 = 14.2**

CPU2006 license: 6

Test sponsor: Oracle Corporation

Tested by: Fujitsu

Test date: Oct-2010

Hardware Availability: Dec-2010

Software Availability: Sep-2010

## Operating System Notes (Continued)

```
lpg_alloc_prefer=1
    Prefer local pages, even if not easily available
```

Other System Settings:

The webconsole service was turned off using  
svcadm disable webconsole

## Platform Notes

Memory is 8-way interleaved by filling each CMU's slots with the same capacity DIMMs.

This result is measured on a SPARC Enterprise M8000 server from Fujitsu. The SPARC Enterprise M8000 server from Oracle and from Fujitsu are electrically equivalent.

## Base Compiler Invocation

C benchmarks:  
cc

C++ benchmarks:  
CC

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_SOLARIS_SPARC
        403.gcc: -DSPEC_CPU_SOLARIS
462.libquantum: -DSPEC_CPU_SOLARIS
483.xalancbmk: -DSPEC_CPU_SOLARIS
```

## Base Optimization Flags

C benchmarks:  
-fast -fma=fused -xipo=2 -xpagesize=4M -xprefetch\_level=1  
-xalias\_level=std -ll2amm

C++ benchmarks:  
-xdepend -library=stlport4 -fast -fma=fused -xipo=2 -xpagesize=4M  
-xprefetch\_level=2 -xalias\_level=compatible -lfast



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation  
SPARC Enterprise M8000

**SPECint2006 = 15.8**  
**SPECint\_base2006 = 14.2**

CPU2006 license: 6

Test sponsor: Oracle Corporation

Tested by: Fujitsu

**Test date:** Oct-2010

**Hardware Availability:** Dec-2010

**Software Availability:** Sep-2010

## Base Other Flags

C benchmarks:

-xjobs=16 -V -#

C++ benchmarks:

-xjobs=16 -verbose=diags,version

## Peak Compiler Invocation

C benchmarks:

cc

C++ benchmarks:

cc

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_SOLARIS\_SPARC

403.gcc: -DSPEC\_CPU\_SOLARIS

462.libquantum: -DSPEC\_CPU\_SOLARIS

483.xalancbmk: -DSPEC\_CPU\_SOLARIS

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -fma=fused -xipo=2  
-xalias\_level=std -xprefetch\_level=1 -xrestrict -lfast

401.bzip2: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M  
-fma=fused -xalias\_level=strong -xchip=generic

403.gcc: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M  
-xipo=2 -xalias\_level=std -xO4 -xchip=generic -xunroll=7  
-ll2amm

429.mcf: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M  
-xipo=2 -xprefetch=latx:0.5 -xprefetch\_level=3  
-xprefetch\_auto\_type=indirect\_array\_access -xchip=generic  
-xlinkopt -xunroll=7 -W2,-Apf:llist=3  
-W2,-Apf:noinnerllist -Wc,-Qlp-prt=1 -Wc,-Qlp-prwt=3  
-lfast

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation  
SPARC Enterprise M8000

**SPECint2006 = 15.8**  
**SPECint\_base2006 = 14.2**

CPU2006 license: 6

Test sponsor: Oracle Corporation

Tested by: Fujitsu

Test date: Oct-2010

Hardware Availability: Dec-2010

Software Availability: Sep-2010

## Peak Optimization Flags (Continued)

```
445.gobmk: -xprofile=collect:./feedback(pass 1)
            -xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
            -fma=fused -xalias_level=std -xrestrict
```

```
456.hmmer: basepeak = yes
```

```
458.sjeng: -xprofile=collect:./feedback(pass 1)
            -xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
            -xiwo=2 -xo4 -xlinkopt -xunroll=2
```

```
462.libquantum: -fast -xpagesize=4M -xalias_level=std -xiwo=2
                -xprefetch=no%auto -xo4 -xarch=generic -xcache=generic
                -xlinkopt=2 -xunroll=8
```

```
464.h264ref: -xprofile=collect:./feedback(pass 1)
              -xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
              -xiwo=2 -xalias_level=std -xprefetch=no%auto -xlinkopt=2
              -l12amm
```

C++ benchmarks:

```
471.omnetpp: -xdepend -library=stlport4
              -xprofile=collect:./feedback(pass 1)
              -xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
              -xalias_level=compatible -fma=fused -xiwo=2
              -xprefetch_level=2 -Qoption cg -Qlp-av=0 -lfast
```

```
473.astar: -xdepend -library=stlport4
            -xprofile=collect:./feedback(pass 1)
            -xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
            -xalias_level=compatible -fma=fused -xiwo=2
            -xprefetch_level=2 -xprefetch-latx:0.5 -lfast
```

```
483.xalancbmk: -xdepend -library=stlport4 -fast -xpagesize=4M
                 -xalias_level=compatible -fma=fused -xiwo=2
                 -xprefetch=no%auto -lfast
```

## Peak Other Flags

C benchmarks:

```
-xjobs=16 -V -#
```

C++ benchmarks:

```
-xjobs=16 -verbose=diags,version
```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation  
SPARC Enterprise M8000

**SPECint2006 = 15.8**

**SPECint\_base2006 = 14.2**

**CPU2006 license:** 6

**Test date:** Oct-2010

**Test sponsor:** Oracle Corporation

**Hardware Availability:** Dec-2010

**Tested by:** Fujitsu

**Software Availability:** Sep-2010

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.2-SPARC.20101221.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.2-SPARC.20101221.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 13:44:41 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 21 December 2010.