



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL460c G7  
(3.06 GHz, Intel Xeon X5675)

SPECfp<sup>®</sup>\_rate2006 = 259

SPECfp\_rate\_base2006 = 251

CPU2006 license: 3


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Jan-2011

Hardware Availability: Feb-2011

Software Availability: Dec-2010

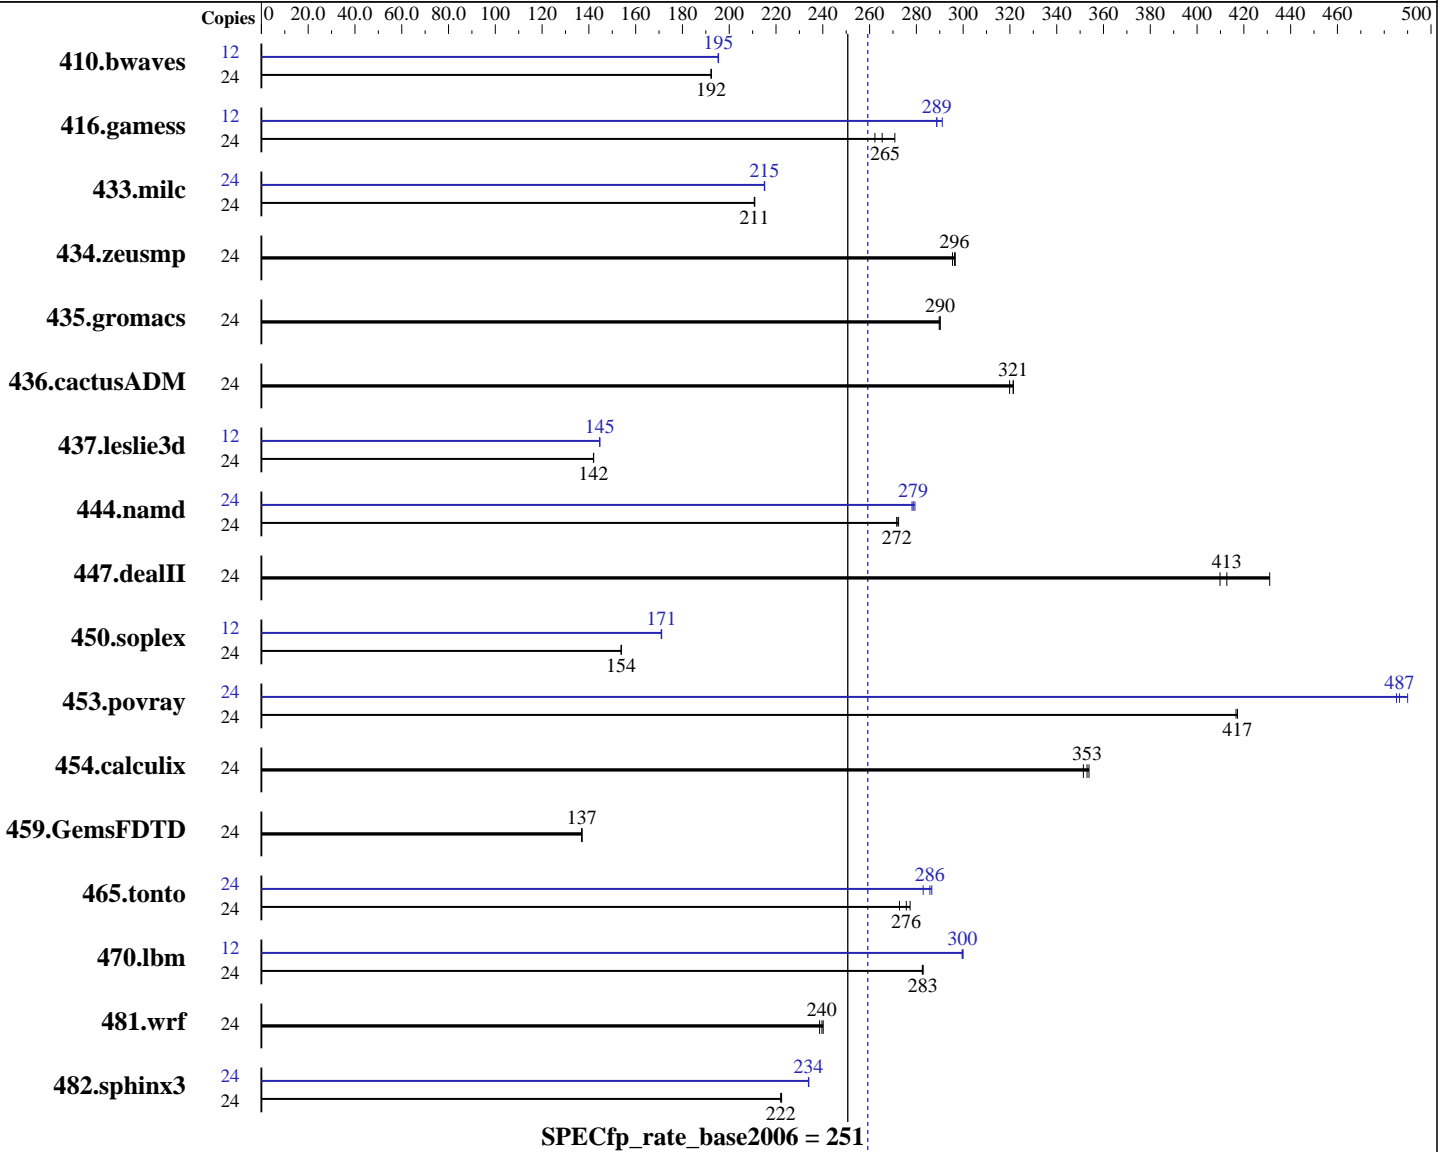

SPECfp\_rate2006 = 259

### Hardware

CPU Name: Intel Xeon X5675  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.46 GHz  
 CPU MHz: 3067  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64) SP1, Kernel 2.6.32.12-0.7-default  
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.1.116 Build 20101116  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp\_rate2006 = 259

ProLiant BL460c G7  
(3.06 GHz, Intel Xeon X5675)

SPECfp\_rate\_base2006 = 251

CPU2006 license: 3

Test date: Jan-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Feb-2011

Tested by: Hewlett-Packard Company

Software Availability: Dec-2010

L3 Cache: 12 MB I+D on chip per chip  
Other Cache: None  
Memory: 96 GB (12 x 8 GB 2Rx4 PC3-10600R-9, ECC)  
Disk Subsystem: 1 x 146 GB 10 K SAS  
Other Hardware: None

Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	1696	192	<b>1696</b>	<b>192</b>	1697	192	12	834	195	<b>834</b>	<b>195</b>	835	195
416.gamess	24	1792	262	1735	271	<b>1771</b>	<b>265</b>	12	807	291	<b>814</b>	<b>289</b>	814	289
433.milc	24	1044	211	<b>1045</b>	<b>211</b>	1045	211	24	1024	215	1025	215	<b>1025</b>	<b>215</b>
434.zeusmp	24	736	297	739	295	<b>737</b>	<b>296</b>	24	736	297	739	295	<b>737</b>	<b>296</b>
435.gromacs	24	591	290	<b>591</b>	<b>290</b>	591	290	24	591	290	<b>591</b>	<b>290</b>	591	290
436.cactusADM	24	<b>892</b>	<b>321</b>	897	320	892	321	24	<b>892</b>	<b>321</b>	897	320	892	321
437.leslie3d	24	1588	142	<b>1589</b>	<b>142</b>	1589	142	12	780	145	780	145	<b>780</b>	<b>145</b>
444.namd	24	707	272	<b>708</b>	<b>272</b>	709	272	24	689	279	<b>691</b>	<b>279</b>	692	278
447.dealII	24	637	431	<b>665</b>	<b>413</b>	670	410	24	637	431	<b>665</b>	<b>413</b>	670	410
450.soplex	24	1301	154	<b>1301</b>	<b>154</b>	1301	154	12	585	171	<b>585</b>	<b>171</b>	585	171
453.povray	24	306	417	<b>306</b>	<b>417</b>	306	417	24	<b>262</b>	<b>487</b>	261	490	263	485
454.calculix	24	560	354	563	351	<b>561</b>	<b>353</b>	24	560	354	563	351	<b>561</b>	<b>353</b>
459.GemsFDTD	24	1859	137	1858	137	<b>1859</b>	<b>137</b>	24	1859	137	1858	137	<b>1859</b>	<b>137</b>
465.tonto	24	<b>857</b>	<b>276</b>	852	277	866	273	24	<b>826</b>	<b>286</b>	824	287	835	283
470.lbm	24	1166	283	<b>1166</b>	<b>283</b>	1167	283	12	550	300	<b>550</b>	<b>300</b>	550	300
481.wrf	24	1123	239	<b>1119</b>	<b>240</b>	1116	240	24	1123	239	<b>1119</b>	<b>240</b>	1116	240
482.sphinx3	24	2103	222	2106	222	<b>2106</b>	<b>222</b>	24	<b>1999</b>	<b>234</b>	2000	234	1999	234

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

```
'nodev /mnt/hugepages hugetlbfs defaults 0 0' added to /etc/fstab
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
echo 10800 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp\_rate2006 = 259

ProLiant BL460c G7  
(3.06 GHz, Intel Xeon X5675)

SPECfp\_rate\_base2006 = 251

**CPU2006 license:** 3  
**Test sponsor:** Hewlett-Packard Company  
**Tested by:** Hewlett-Packard Company

**Test date:** Jan-2011  
**Hardware Availability:** Feb-2011  
**Software Availability:** Dec-2010

### Platform Notes

BIOS configuration:  
HP Power Profile set to Maximum Performance  
Thermal Configuration set to Increased Cooling  
Data Reuse set to Disabled

### General Notes

Binaries were compiled on RHEL5.5 with Binutils binutils-2.17.50.0.6-14.el5

### Base Compiler Invocation

C benchmarks:  
    icc -m64  
  
C++ benchmarks:  
    icpc -m64  
  
Fortran benchmarks:  
    ifort -m64  
  
Benchmarks using both Fortran and C:  
    icc -m64 ifort -m64

### Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.deallI: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp\_rate2006 = 259**

ProLiant BL460c G7  
(3.06 GHz, Intel Xeon X5675)

**SPECfp\_rate\_base2006 = 251**

**CPU2006 license:** 3

**Test date:** Jan-2011

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Feb-2011

**Tested by:** Hewlett-Packard Company

**Software Availability:** Dec-2010

## Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias`

Fortran benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static`

Benchmarks using both Fortran and C:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias`

## Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m64`

482.sphinx3: `icc -m32`

C++ benchmarks (except as noted below):

`icpc -m64`

450.soplex: `icpc -m32`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`  
 416.gamess: `-DSPEC_CPU_LP64`  
 433.milc: `-DSPEC_CPU_LP64`  
 434.zeusmp: `-DSPEC_CPU_LP64`  
 435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`  
 436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`  
 437.leslie3d: `-DSPEC_CPU_LP64`  
 444.namd: `-DSPEC_CPU_LP64`  
 447.dealII: `-DSPEC_CPU_LP64`  
 453.povray: `-DSPEC_CPU_LP64`  
 454.calculix: `-DSPEC_CPU_LP64 -nofor_main`  
 459.GemsFDTD: `-DSPEC_CPU_LP64`  
 465.tonto: `-DSPEC_CPU_LP64`

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp\_rate2006 = 259**

ProLiant BL460c G7  
(3.06 GHz, Intel Xeon X5675)

**SPECfp\_rate\_base2006 = 251**

**CPU2006 license:** 3

**Test date:** Jan-2011

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Feb-2011

**Tested by:** Hewlett-Packard Company

**Software Availability:** Dec-2010

## Peak Portability Flags (Continued)

470.lbm: -DSPEC\_CPU\_LP64

481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3  
-ansi-alias -opt-prefetch -static -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

459.GemsFDTD: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

**SPECfp\_rate2006 = 259**

ProLiant BL460c G7  
(3.06 GHz, Intel Xeon X5675)

**SPECfp\_rate\_base2006 = 251**

**CPU2006 license:** 3

**Test date:** Jan-2011

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Feb-2011

**Tested by:** Hewlett-Packard Company

**Software Availability:** Dec-2010

## Peak Optimization Flags (Continued)

```
465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT
```

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revA.html>

<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20110216.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revA.xml>

<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20110216.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 15:02:45 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 16 February 2011.