



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

Sun Blade X6275 M2 Server Module (Intel Xeon X5675 3.06 GHz)

SPECint®2006 = 41.9

SPECint_base2006 = 39.5

CPU2006 license: 6


Test sponsor: Oracle Corporation

Tested by: Oracle Corporation

Test date: Jan-2011

Hardware Availability: Mar-2011

Software Availability: Nov-2010

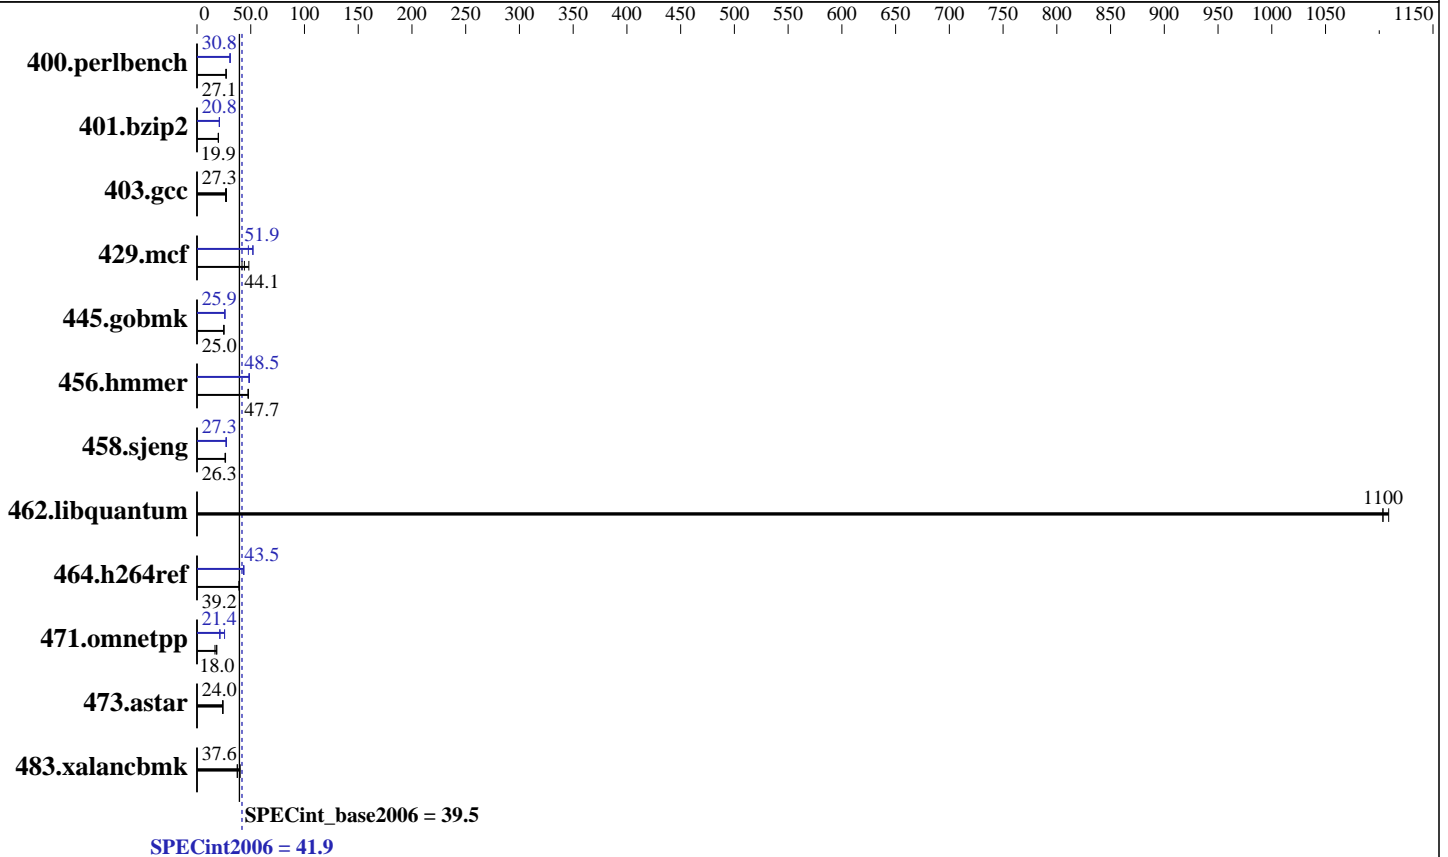

Hardware

CPU Name: Intel Xeon X5675
 CPU Characteristics: Intel Turbo Boost Technology up to 3.46 GHz
 CPU MHz: 3067
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip
 CPU(s) orderable: 1 or 2 chips per Sun Blade X6275 M2 node
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 96 GB (12 x 8 GB 2Rx4 PC3-10600R-9, ECC, per node)
 Disk Subsystem: 1 x 24 GB, SAS, Sun FlashDisk
 Other Hardware: None

Software

Operating System: Oracle Linux 5.5
 kernel 2.6.18-194.el5
 Compiler: Intel C++ Intel 64 Compiler XE for applications running on Intel 64
 Version 12.0.1.116 Build 20101116
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

Sun Blade X6275 M2 Server Module (Intel Xeon X5675 3.06 GHz)

SPECint2006 = 41.9

SPECint_base2006 = 39.5

CPU2006 license: 6

Test sponsor: Oracle Corporation

Tested by: Oracle Corporation

Test date: Jan-2011

Hardware Availability: Mar-2011

Software Availability: Nov-2010

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	360	27.2	361	27.1	361	27.0	318	30.7	317	30.8	317	30.8
401.bzip2	486	19.9	484	19.9	485	19.9	463	20.8	463	20.8	463	20.8
403.gcc	303	26.6	294	27.4	295	27.3	303	26.6	294	27.4	295	27.3
429.mcf	207	44.1	218	41.9	189	48.2	191	47.8	175	52.2	176	51.9
445.gobmk	419	25.0	419	25.0	420	25.0	405	25.9	405	25.9	405	25.9
456.hammer	196	47.6	196	47.7	196	47.7	192	48.5	192	48.5	192	48.6
458.sjeng	456	26.6	461	26.2	461	26.3	443	27.3	449	26.9	442	27.4
462.libquantum	18.8	1100	18.7	1110	18.8	1100	18.8	1100	18.7	1110	18.8	1100
464.h264ref	560	39.5	564	39.2	566	39.1	509	43.5	509	43.5	509	43.4
471.omnetpp	374	16.7	347	18.0	338	18.5	292	21.4	244	25.6	296	21.1
473.astar	294	23.9	292	24.0	291	24.1	294	23.9	292	24.0	291	24.1
483.xalancbmk	184	37.6	184	37.4	172	40.2	184	37.6	184	37.4	172	40.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
Hugepages was enabled with the following:
'nODEV /mnt/hugepages hugetlbfs defaults 0 0' added to /etc/fstab
echo 900 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

Platform Notes

Load Default BIOS Settings and then change the following
Hardware Prefetch Enabled
Adjacent Cache Line Prefetch Enabled
L1 Data Prefetch Enabled

General Notes

OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter
Binaries were compiled on RHEL5.5 with Binutils binutils-2.17.50.0.6-14.el5

Base Compiler Invocation

C benchmarks:
icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

Sun Blade X6275 M2 Server Module (Intel Xeon X5675 3.06 GHz)

SPECint2006 = 41.9

SPECint_base2006 = 39.5

CPU2006 license: 6

Test sponsor: Oracle Corporation

Tested by: Oracle Corporation

Test date: Jan-2011

Hardware Availability: Mar-2011

Software Availability: Nov-2010

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/smartheap -lsmartheap64
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64
400.perlbench: icc -m32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

Sun Blade X6275 M2 Server Module (Intel Xeon X5675 3.06 GHz)

SPECint2006 = 41.9

SPECint_base2006 = 39.5

CPU2006 license: 6

Test sponsor: Oracle Corporation

Tested by: Oracle Corporation

Test date: Jan-2011

Hardware Availability: Mar-2011

Software Availability: Nov-2010

Peak Compiler Invocation (Continued)

429.mcf: `icc -m32`

445.gobmk: `icc -m32`

464.h264ref: `icc -m32`

C++ benchmarks (except as noted below):

`icpc -m64`

471.omnetpp: `icpc -m32`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

401.bzip2: `-DSPEC_CPU_LP64`

403.gcc: `-DSPEC_CPU_LP64`

456.hammer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

473.astar: `-DSPEC_CPU_LP64`

483.xalancbmk: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -ansi-alias -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT`

401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch -ansi-alias`

403.gcc: `basepeak = yes`

429.mcf: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32 -ansi-alias -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT`

445.gobmk: `-xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -auto-ilp32 -ansi-alias -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

Sun Blade X6275 M2 Server Module (Intel Xeon X5675 3.06 GHz)

SPECint2006 = 41.9

SPECint_base2006 = 39.5

CPU2006 license: 6

Test sponsor: Oracle Corporation

Tested by: Oracle Corporation

Test date: Jan-2011

Hardware Availability: Mar-2011

Software Availability: Nov-2010

Peak Optimization Flags (Continued)

456.hmmcr: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias -Wl,-z,muldefs
-L/smartheap -lsmartheap
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

http://www.spec.org/cpu2006/flags/Oracle-platform-x86_64.20101027.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

http://www.spec.org/cpu2006/flags/Oracle-platform-x86_64.20101027.xml



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

Sun Blade X6275 M2 Server Module (Intel Xeon X5675 3.06 GHz)

SPECint2006 = 41.9

SPECint_base2006 = 39.5

CPU2006 license: 6

Test sponsor: Oracle Corporation

Tested by: Oracle Corporation

Test date: Jan-2011

Hardware Availability: Mar-2011

Software Availability: Nov-2010

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 17:12:07 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 March 2011.