



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp®_rate2006 = 266

PRIMERGY CX122 S1, Intel Xeon X5675, 3.06 GHz

SPECfp_rate_base2006 = 258

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Feb-2011

Hardware Availability: Feb-2011

Software Availability: Jan-2011

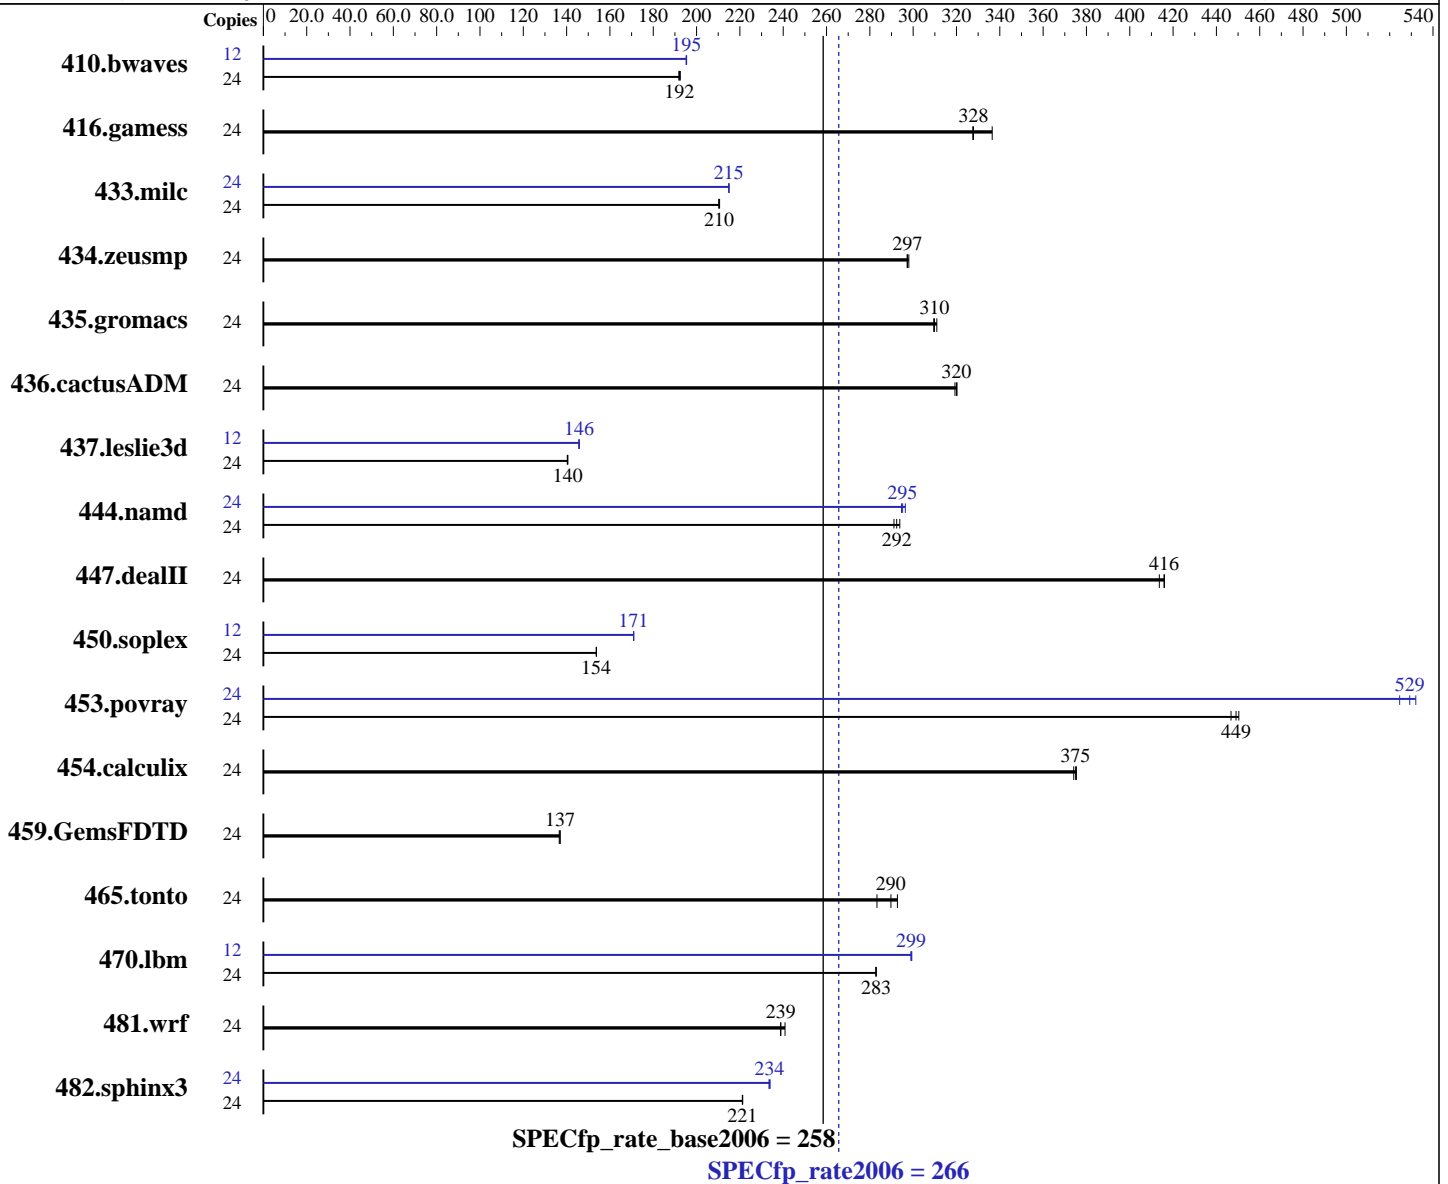

Hardware

CPU Name: Intel Xeon X5675
 CPU Characteristics: Intel Turbo Boost Technology up to 3.46 GHz
 CPU MHz: 3067
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64) with SP1, Kernel 2.6.32.12-0.7-default
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.1.116 Build 20101116
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 266

PRIMERGY CX122 S1, Intel Xeon X5675, 3.06 GHz

SPECfp_rate_base2006 = 258

CPU2006 license: 19

Test date: Feb-2011

Test sponsor: Fujitsu

Hardware Availability: Feb-2011

Tested by: Fujitsu

Software Availability: Jan-2011

L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 96 GB (12 x 8 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem: 1 x SATA, 160 GB, 5400 RPM
Other Hardware: --

Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	24	1694	192	1698	192	1700	192	12	835	195	835	195	836	195		
416.gamess	24	1397	336	1435	328	1433	328	24	1397	336	1435	328	1433	328		
433.milc	24	1046	211	1048	210	1047	210	24	1025	215	1025	215	1025	215		
434.zeusmp	24	734	297	733	298	735	297	24	734	297	733	298	735	297		
435.gromacs	24	551	311	553	310	554	309	24	551	311	553	310	554	309		
436.cactusADM	24	898	319	896	320	896	320	24	898	319	896	320	896	320		
437.leslie3d	24	1606	140	1605	141	1608	140	12	773	146	773	146	775	146		
444.namd	24	661	291	658	292	655	294	24	653	295	649	296	652	295		
447.dealII	24	664	414	660	416	660	416	24	664	414	660	416	660	416		
450.soplex	24	1302	154	1302	154	1302	154	12	585	171	585	171	585	171		
453.povray	24	286	447	284	450	284	449	24	241	529	243	525	240	532		
454.calculix	24	529	374	528	375	527	375	24	529	374	528	375	527	375		
459.GemsFDTD	24	1864	137	1859	137	1859	137	24	1864	137	1859	137	1859	137		
465.tonto	24	815	290	807	293	834	283	24	815	290	807	293	834	283		
470.lbm	24	1165	283	1166	283	1166	283	12	551	299	551	299	552	299		
481.wrf	24	1113	241	1123	239	1122	239	24	1113	241	1123	239	1122	239		
482.sphinx3	24	2114	221	2115	221	2115	221	24	1999	234	2002	234	2004	233		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
Hugepages were not configured on the system

Platform Notes

BIOS configuration:
Data Reuse Optimization = Disable



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 266

PRIMERGY CX122 S1, Intel Xeon X5675, 3.06 GHz

SPECfp_rate_base2006 = 258

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Feb-2011
Hardware Availability: Feb-2011
Software Availability: Jan-2011

General Notes

For information about Fujitsu please visit: <http://www.fujitsu.com>
Binaries were compiled on RHEL5.5 with binutils-2.17.50.0.6-14.el5

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 266

PRIMERGY CX122 S1, Intel Xeon X5675, 3.06 GHz

SPECfp_rate_base2006 = 258

CPU2006 license: 19

Test date: Feb-2011

Test sponsor: Fujitsu

Hardware Availability: Feb-2011

Tested by: Fujitsu

Software Availability: Jan-2011

Base Optimization Flags (Continued)

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 266

PRIMERGY CX122 S1, Intel Xeon X5675, 3.06 GHz

SPECfp_rate_base2006 = 258

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Feb-2011

Hardware Availability: Feb-2011

Software Availability: Jan-2011

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
-ansi-alias -opt-prefetch -static -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

459.GemsFDTD: basepeak = yes

465.tonto: basepeak = yes

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 266

PRIMERGY CX122 S1, Intel Xeon X5675, 3.06 GHz

SPECfp_rate_base2006 = 258

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Feb-2011

Hardware Availability: Feb-2011

Software Availability: Jan-2011

Peak Optimization Flags (Continued)

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.20110316.html>

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revA.20110316.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.20110316.xml>

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revA.20110316.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 16:42:33 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 16 March 2011.