



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp[®]_rate2006 = 179

Cisco UCS B200 M2 (Intel Xeon E5620, 2.40 GHz)

SPECfp_rate_base2006 = 174

CPU2006 license: 9019


Test date: Feb-2011

Test sponsor: Cisco Systems

Hardware Availability: Mar-2011

Tested by: Cisco Systems

Software Availability: Jan-2011

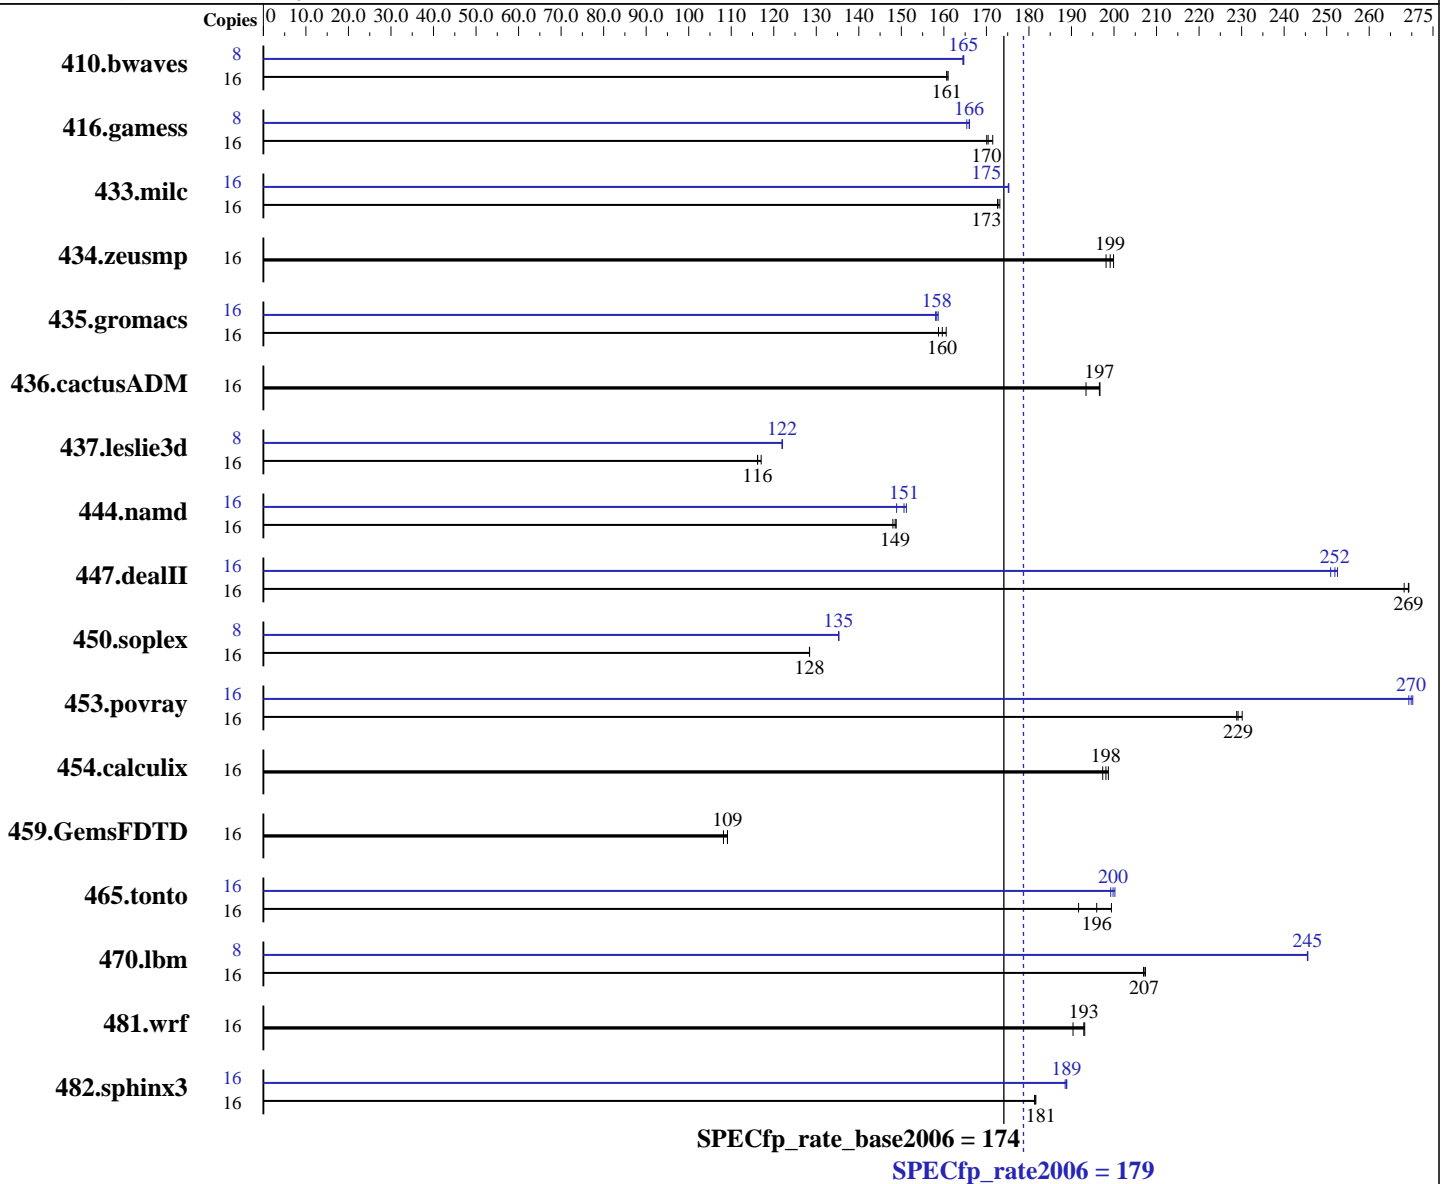

Hardware

CPU Name: Intel Xeon E5620
 CPU Characteristics: Intel Turbo Boost Technology up to 2.67 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1, 2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64) with SP1, Kernel 2.6.32.12-0.7-default
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.1.116 Build 20101116
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp_rate2006 = 179

Cisco UCS B200 M2 (Intel Xeon E5620, 2.40 GHz)

SPECfp_rate_base2006 = 174

CPU2006 license: 9019

Test date: Feb-2011

Test sponsor: Cisco Systems

Hardware Availability: Mar-2011

Tested by: Cisco Systems

Software Availability: Jan-2011

L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (12 x 4 GB 2Rx4 PC3L-10600R-9, ECC)
Disk Subsystem: 73 GB SAS, 15K RPM
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: Binaries compiled on RHEL5.5 with binutils-2.17.50.0.6-14.el5

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	1351	161	1353	161	<u>1353</u>	<u>161</u>	8	660	165	<u>660</u>	<u>165</u>	661	164
416.gamess	16	1842	170	1827	171	<u>1838</u>	<u>170</u>	8	<u>944</u>	<u>166</u>	943	166	947	165
433.milc	16	848	173	<u>850</u>	<u>173</u>	851	173	16	<u>838</u>	<u>175</u>	838	175	839	175
434.zeusmp	16	728	200	<u>731</u>	<u>199</u>	735	198	16	728	200	<u>731</u>	<u>199</u>	735	198
435.gromacs	16	720	159	<u>716</u>	<u>160</u>	712	161	16	723	158	720	159	<u>722</u>	<u>158</u>
436.cactusADM	16	<u>973</u>	<u>197</u>	989	193	972	197	16	<u>973</u>	<u>197</u>	989	193	972	197
437.leslie3d	16	1295	116	<u>1294</u>	<u>116</u>	1285	117	8	616	122	617	122	<u>616</u>	<u>122</u>
444.namd	16	<u>864</u>	<u>149</u>	867	148	862	149	16	862	149	849	151	<u>852</u>	<u>151</u>
447.dealII	16	680	269	682	268	<u>680</u>	<u>269</u>	16	725	253	<u>727</u>	<u>252</u>	729	251
450.soplex	16	<u>1039</u>	<u>128</u>	1039	128	1039	128	8	493	135	493	135	<u>493</u>	<u>135</u>
453.povray	16	370	230	372	229	<u>371</u>	<u>229</u>	16	315	270	<u>315</u>	<u>270</u>	316	269
454.calculix	16	669	197	664	199	<u>666</u>	<u>198</u>	16	669	197	664	199	<u>666</u>	<u>198</u>
459.GemsFDTD	16	1556	109	1569	108	<u>1556</u>	<u>109</u>	16	1556	109	1569	108	<u>1556</u>	<u>109</u>
465.tonto	16	821	192	<u>804</u>	<u>196</u>	790	199	16	786	200	<u>788</u>	<u>200</u>	790	199
470.lbm	16	1060	207	<u>1062</u>	<u>207</u>	1062	207	8	<u>448</u>	<u>245</u>	448	246	448	245
481.wrf	16	925	193	939	190	<u>927</u>	<u>193</u>	16	925	193	939	190	<u>927</u>	<u>193</u>
482.sphinx3	16	1720	181	<u>1718</u>	<u>181</u>	1717	182	16	<u>1652</u>	<u>189</u>	1654	189	1651	189

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

ulimit -s unlimited was used to set the stacksize to unlimited prior to run
Large pages were not enabled for this run

Platform Notes

BIOS Configuration : Data Reuse Optimization = Disabled



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp_rate2006 = 179

Cisco UCS B200 M2 (Intel Xeon E5620, 2.40 GHz)

SPECfp_rate_base2006 = 174

CPU2006 license: 9019

Test date: Feb-2011

Test sponsor: Cisco Systems

Hardware Availability: Mar-2011

Tested by: Cisco Systems

Software Availability: Jan-2011

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp_rate2006 = 179

Cisco UCS B200 M2 (Intel Xeon E5620, 2.40 GHz)

SPECfp_rate_base2006 = 174

CPU2006 license: 9019

Test date: Feb-2011

Test sponsor: Cisco Systems

Hardware Availability: Mar-2011

Tested by: Cisco Systems

Software Availability: Jan-2011

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
-ansi-alias -opt-prefetch -static -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp_rate2006 = 179

Cisco UCS B200 M2 (Intel Xeon E5620, 2.40 GHz)

SPECfp_rate_base2006 = 174

CPU2006 license: 9019

Test date: Feb-2011

Test sponsor: Cisco Systems

Hardware Availability: Mar-2011

Tested by: Cisco Systems

Software Availability: Jan-2011

Peak Optimization Flags (Continued)

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-static -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp_rate2006 = 179

Cisco UCS B200 M2 (Intel Xeon E5620, 2.40 GHz)

SPECfp_rate_base2006 = 174

CPU2006 license: 9019

Test date: Feb-2011

Test sponsor: Cisco Systems

Hardware Availability: Mar-2011

Tested by: Cisco Systems

Software Availability: Jan-2011

Peak Optimization Flags (Continued)

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/Intel-Platform-Settings.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/Intel-Platform-Settings.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 15:31:49 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 March 2011.