



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL380 G7  
(3.60 GHz, Intel Xeon X5687)

**SPECfp®\_rate2006 = 238**

**SPECfp\_rate\_base2006 = 230**

CPU2006 license: 3


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Feb-2011

Hardware Availability: Feb-2011

Software Availability: Dec-2010

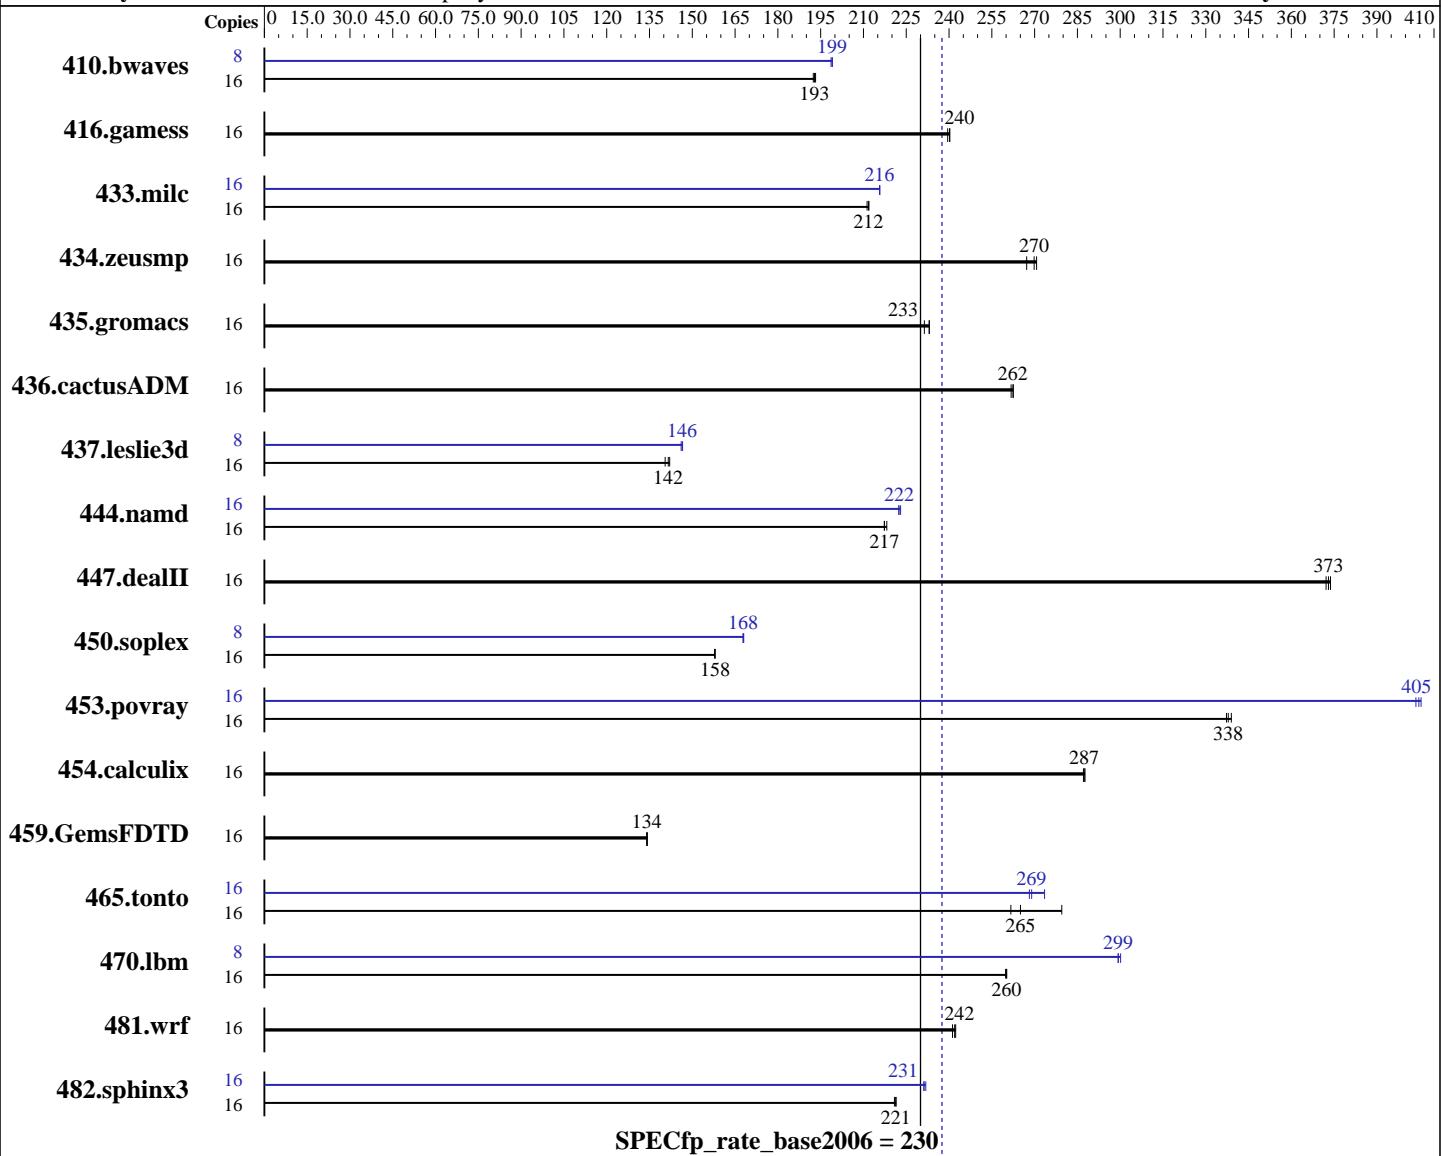

### Hardware

CPU Name: Intel Xeon X5687  
CPU Characteristics: Intel Turbo Boost Technology up to 3.86 GHz  
CPU MHz: 3600  
FPU: Integrated  
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64) SP1, Kernel 2.6.32.12-0.7-default  
Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.1.116 Build 20101116  
Auto Parallel: No  
File System: ext3  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL380 G7  
(3.60 GHz, Intel Xeon X5687)

**SPECfp\_rate2006 = 238**

**SPECfp\_rate\_base2006 = 230**

**CPU2006 license:** 3

**Test date:** Feb-2011

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Feb-2011

**Tested by:** Hewlett-Packard Company

**Software Availability:** Dec-2010

L3 Cache: 12 MB I+D on chip per chip  
Other Cache: None  
Memory: 96 GB (12 x 8 GB 2Rx4 PC3-10600R-9, ECC)  
Disk Subsystem: 1 x 300 GB 10 K SAS  
Other Hardware: None

Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	1125	193	<u>1128</u>	<u>193</u>	1130	192	8	<u>546</u>	<u>199</u>	546	199	547	199
416.gamess	16	<b>1304</b>	<b>240</b>	1308	240	1304	240	16	<u>1304</u>	<u>240</u>	1308	240	1304	240
433.milc	16	693	212	695	211	<u>693</u>	<u>212</u>	16	681	216	<u>681</u>	<u>216</u>	681	216
434.zeusmp	16	538	271	545	267	<u>540</u>	<u>270</u>	16	538	271	545	267	<u>540</u>	<u>270</u>
435.gromacs	16	494	231	490	233	<u>490</u>	<u>233</u>	16	494	231	490	233	<u>490</u>	<u>233</u>
436.cactusADM	16	730	262	728	263	<u>729</u>	<u>262</u>	16	730	262	728	263	<u>729</u>	<u>262</u>
437.leslie3d	16	<b>1062</b>	<b>142</b>	1071	140	1059	142	8	513	147	515	146	<b>513</b>	<b>146</b>
444.namd	16	<u>590</u>	<u>217</u>	590	217	588	218	16	<u>577</u>	<u>222</u>	575	223	<u>577</u>	222
447.dealII	16	492	372	490	374	<u>491</u>	<u>373</u>	16	492	372	490	374	<u>491</u>	<u>373</u>
450.soplex	16	845	158	845	158	<u>845</u>	<u>158</u>	8	398	168	<u>397</u>	<u>168</u>	397	168
453.povray	16	<u>252</u>	<u>338</u>	251	339	252	337	16	210	405	211	404	<u>210</u>	<u>405</u>
454.calculix	16	<u>459</u>	<u>287</u>	460	287	459	288	16	<u>459</u>	<u>287</u>	460	287	459	288
459.GemsFDTD	16	1265	134	1266	134	<u>1266</u>	<u>134</u>	16	1265	134	1266	134	<u>1266</u>	<u>134</u>
465.tonto	16	563	280	<u>594</u>	<u>265</u>	602	262	16	587	268	576	273	<u>585</u>	<u>269</u>
470.lbm	16	845	260	846	260	<u>845</u>	<u>260</u>	8	366	300	<u>367</u>	<u>299</u>	367	299
481.wrf	16	738	242	741	241	<u>739</u>	<u>242</u>	16	738	242	741	241	<u>739</u>	<u>242</u>
482.sphinx3	16	1408	221	<u>1409</u>	<u>221</u>	1412	221	16	<u>1349</u>	<u>231</u>	1345	232	<u>1348</u>	<u>231</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

```
'nodev /mnt/hugepages hugetlbfs defaults 0 0' added to /etc/fstab
'unlimit -s unlimited' was used to set the stacksize to unlimited prior to run
echo 7200 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL380 G7  
(3.60 GHz, Intel Xeon X5687)

**SPECfp\_rate2006 = 238**

**SPECfp\_rate\_base2006 = 230**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Feb-2011

**Hardware Availability:** Feb-2011

**Software Availability:** Dec-2010

## Platform Notes

BIOS configuration:

HP Power Profile set to Maximum Performance  
Thermal Configuration set to Increased Cooling  
Data Reuse set to Disabled

## General Notes

Binaries were compiled on RHEL5.5

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL380 G7  
(3.60 GHz, Intel Xeon X5687)

**SPECfp\_rate2006 = 238**

**SPECfp\_rate\_base2006 = 230**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Feb-2011

**Hardware Availability:** Feb-2011

**Software Availability:** Dec-2010

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL380 G7  
(3.60 GHz, Intel Xeon X5687)

**SPECfp\_rate2006 = 238**

**SPECfp\_rate\_base2006 = 230**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Feb-2011

**Hardware Availability:** Feb-2011

**Software Availability:** Dec-2010

## Peak Portability Flags (Continued)

470.lbm: -DSPEC\_CPU\_LP64

481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3  
-ansi-alias -opt-prefetch -static -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3  
-B /usr/share/libhugetlbfss/ -Wl,-hugetlbfss-link=BDT

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias  
-B /usr/share/libhugetlbfss/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfss-link=BDT

Fortran benchmarks:

410.bwaves: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div  
-B /usr/share/libhugetlbfss/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfss-link=BDT

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL380 G7  
(3.60 GHz, Intel Xeon X5687)

**SPECfp\_rate2006 = 238**

**SPECfp\_rate\_base2006 = 230**

**CPU2006 license:** 3

**Test date:** Feb-2011

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Feb-2011

**Tested by:** Hewlett-Packard Company

**Software Availability:** Dec-2010

## Peak Optimization Flags (Continued)

465.tonto (continued):

-B /usr/share/libhugetlbfsl -Wl,-melf\_x86\_64 -Wl,-hugetlbfsl-link=BDT

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20110316.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20110316.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 16:37:56 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 16 March 2011.