



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp®_rate2006 = 552

NovaScale R480 F2 (Intel Xeon E7-4820, 2.00 GHz)

SPECfp_rate_base2006 = 529

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Mar-2011

Hardware Availability: Apr-2011

Software Availability: Apr-2011

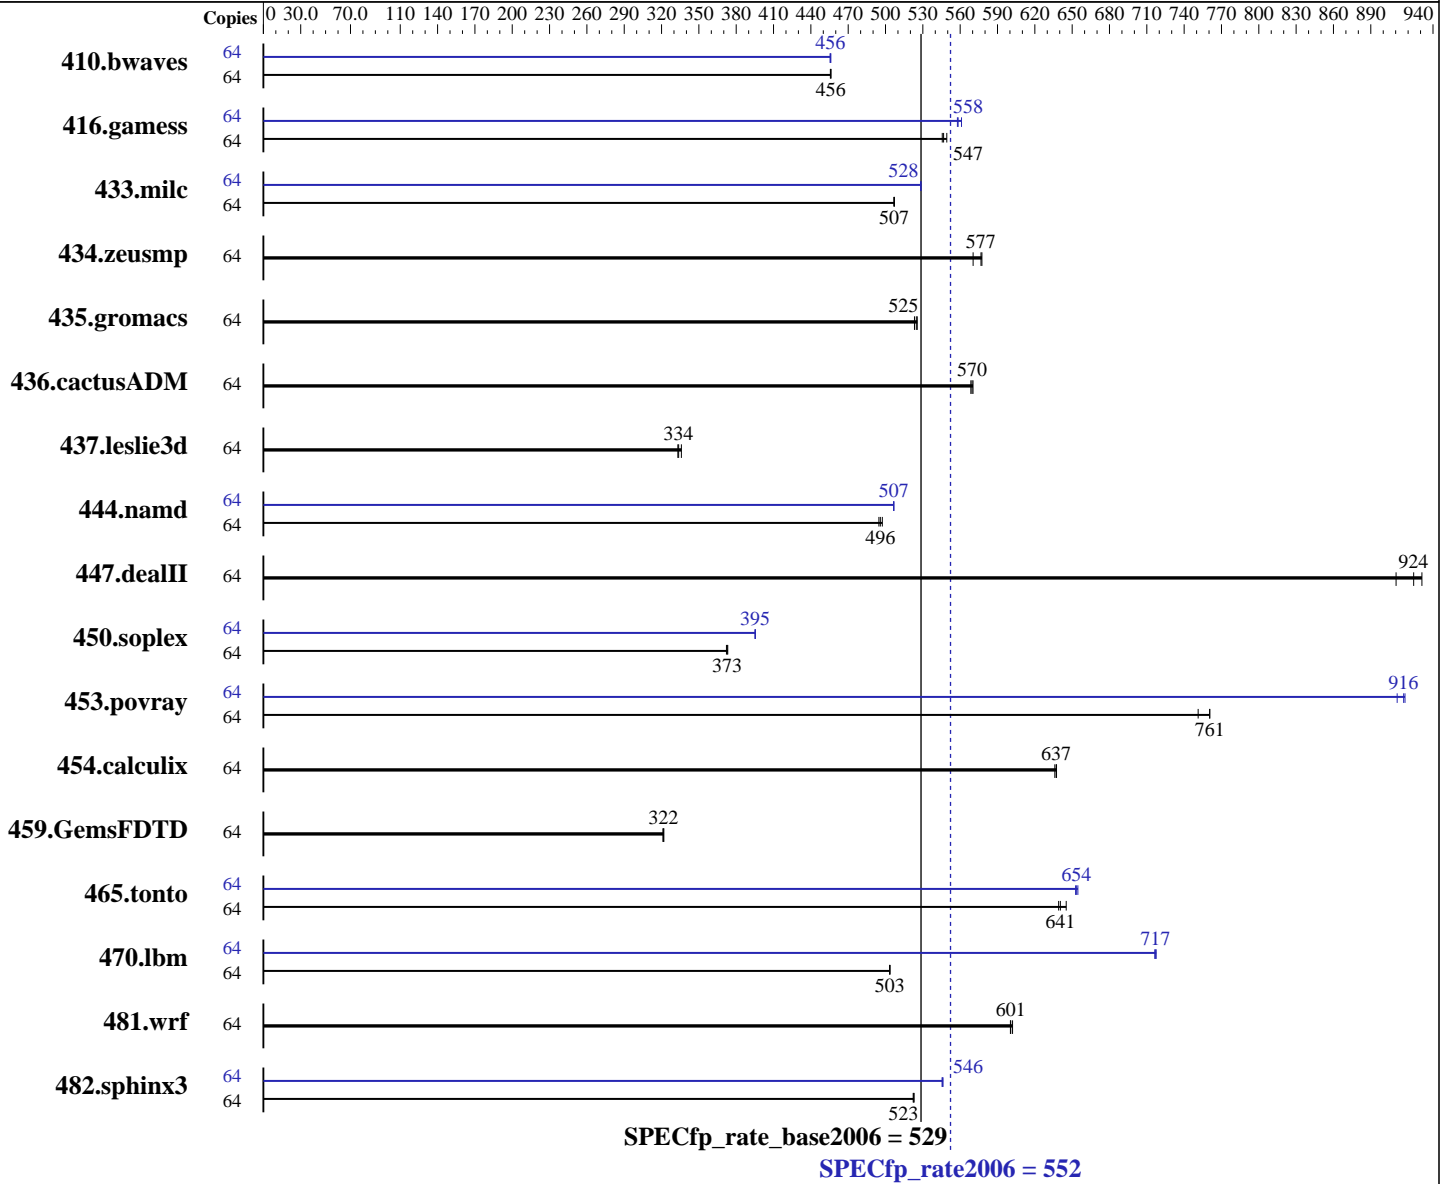

Hardware

CPU Name: Intel Xeon E7-4820
 CPU Characteristics: Intel Turbo Boost Technology up to 2.27 GHz
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 2,4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86_64), Kernel 2.6.32.12-0.7-default
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.1.116 Build 20101116
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = **552**

NovaScale R480 F2 (Intel Xeon E7-4820, 2.00 GHz)

SPECfp_rate_base2006 = **529**

CPU2006 license: 20

Test date: Mar-2011

Test sponsor: Bull SAS

Hardware Availability: Apr-2011

Tested by: Dell Inc.

Software Availability: Apr-2011

L3 Cache: 18 MB I+D on chip per chip
 Other Cache: None
 Memory: 512 GB (64 x 8 GB 4Rx8 PC3-8500R-7, ECC, running at 978 MHz)
 Disk Subsystem: 1 x 500 GB 7200 RPM SAS 6Gb
 Other Hardware: None

Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	64	1907	456	1907	456	1909	456	64	1908	456	1907	456	1910	455		
416.gamess	64	2282	549	2292	547	2297	546	64	2233	561	2247	558	2244	558		
433.milc	64	1159	507	1159	507	1159	507	64	1112	528	1112	529	1112	528		
434.zeusmp	64	1021	570	1010	577	1009	577	64	1021	570	1010	577	1009	577		
435.gromacs	64	873	523	870	526	871	525	64	873	523	870	526	871	525		
436.cactusADM	64	1343	570	1341	570	1345	569	64	1343	570	1341	570	1345	569		
437.leslie3d	64	1803	334	1791	336	1806	333	64	1803	334	1791	336	1806	333		
444.namd	64	1032	497	1035	496	1038	495	64	1013	507	1013	507	1013	507		
447.dealII	64	786	931	792	924	804	910	64	786	931	792	924	804	910		
450.soplex	64	1434	372	1430	373	1432	373	64	1350	395	1350	395	1351	395		
453.povray	64	448	761	448	761	453	751	64	374	911	371	918	372	916		
454.calculix	64	828	637	830	636	829	637	64	828	637	830	636	829	637		
459.GemsFDTD	64	2115	321	2110	322	2111	322	64	2115	321	2110	322	2111	322		
465.tonto	64	983	641	985	639	976	645	64	962	655	964	654	965	653		
470.lbm	64	1747	503	1746	504	1747	503	64	1226	717	1228	716	1226	718		
481.wrf	64	1191	600	1190	601	1187	602	64	1191	600	1190	601	1187	602		
482.sphinx3	64	2388	522	2387	523	2385	523	64	2287	545	2284	546	2286	546		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 57600 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 552

NovaScale R480 F2 (Intel Xeon E7-4820, 2.00 GHz)

SPECfp_rate_base2006 = 529

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Dell Inc.

Test date: Mar-2011
Hardware Availability: Apr-2011
Software Availability: Apr-2011

Platform Notes

BIOS Settings:
Power Management = Maximum Performance (Default = Active Power Controller)

General Notes

The Dell PowerEdge R910 and the Bull NovaScale R480 F2 models are electronically equivalent. The results have been measured on a Dell PowerEdge R910 model. Binaries were compiled on RHEL5.5

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

- 410.bwaves: -DSPEC_CPU_LP64
- 416.gamess: -DSPEC_CPU_LP64
- 433.milc: -DSPEC_CPU_LP64
- 434.zeusmp: -DSPEC_CPU_LP64
- 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
- 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
- 437.leslie3d: -DSPEC_CPU_LP64
- 444.namd: -DSPEC_CPU_LP64
- 447.dealII: -DSPEC_CPU_LP64
- 450.soplex: -DSPEC_CPU_LP64
- 453.povray: -DSPEC_CPU_LP64
- 454.calculix: -DSPEC_CPU_LP64 -nofor_main
- 459.GemsFDTD: -DSPEC_CPU_LP64
- 465.tonto: -DSPEC_CPU_LP64
- 470.lbm: -DSPEC_CPU_LP64
- 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
- 482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 552

NovaScale R480 F2 (Intel Xeon E7-4820, 2.00 GHz)

SPECfp_rate_base2006 = 529

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Mar-2011

Hardware Availability: Apr-2011

Software Availability: Apr-2011

Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias`

Fortran benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static`

Benchmarks using both Fortran and C:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias`

Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m64`

482.sphinx3: `icc -m32`

C++ benchmarks (except as noted below):

`icpc -m64`

450.soplex: `icpc -m32`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
 416.gamess: `-DSPEC_CPU_LP64`
 433.milc: `-DSPEC_CPU_LP64`
 434.zeusmp: `-DSPEC_CPU_LP64`
 435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
 436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
 437.leslie3d: `-DSPEC_CPU_LP64`
 444.namd: `-DSPEC_CPU_LP64`
 447.dealII: `-DSPEC_CPU_LP64`
 453.povray: `-DSPEC_CPU_LP64`
 454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
 459.GemsFDTD: `-DSPEC_CPU_LP64`
 465.tonto: `-DSPEC_CPU_LP64`

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 552

NovaScale R480 F2 (Intel Xeon E7-4820, 2.00 GHz)

SPECfp_rate_base2006 = 529

CPU2006 license: 20

Test date: Mar-2011

Test sponsor: Bull SAS

Hardware Availability: Apr-2011

Tested by: Dell Inc.

Software Availability: Apr-2011

Peak Portability Flags (Continued)

470.lbm: -DSPEC_CPU_LP64

481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
-ansi-alias -opt-prefetch -static -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 552

NovaScale R480 F2 (Intel Xeon E7-4820, 2.00 GHz)

SPECfp_rate_base2006 = 529

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Mar-2011

Hardware Availability: Apr-2011

Software Availability: Apr-2011

Peak Optimization Flags (Continued)

```
465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT
```

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110308.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110308.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 19:07:08 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 12 April 2011.

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>