



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp[®]_rate2006 = 122

ASUS RS300-E7(P8B-E/4L) Server System
(Intel Xeon E3-1280, 3.50 GHz)

SPECfp_rate_base2006 = 118

CPU2006 license: 9016


Test date: Mar-2011

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Apr-2011

Tested by: ASUSTeK Computer Inc.

Software Availability: Jan-2011

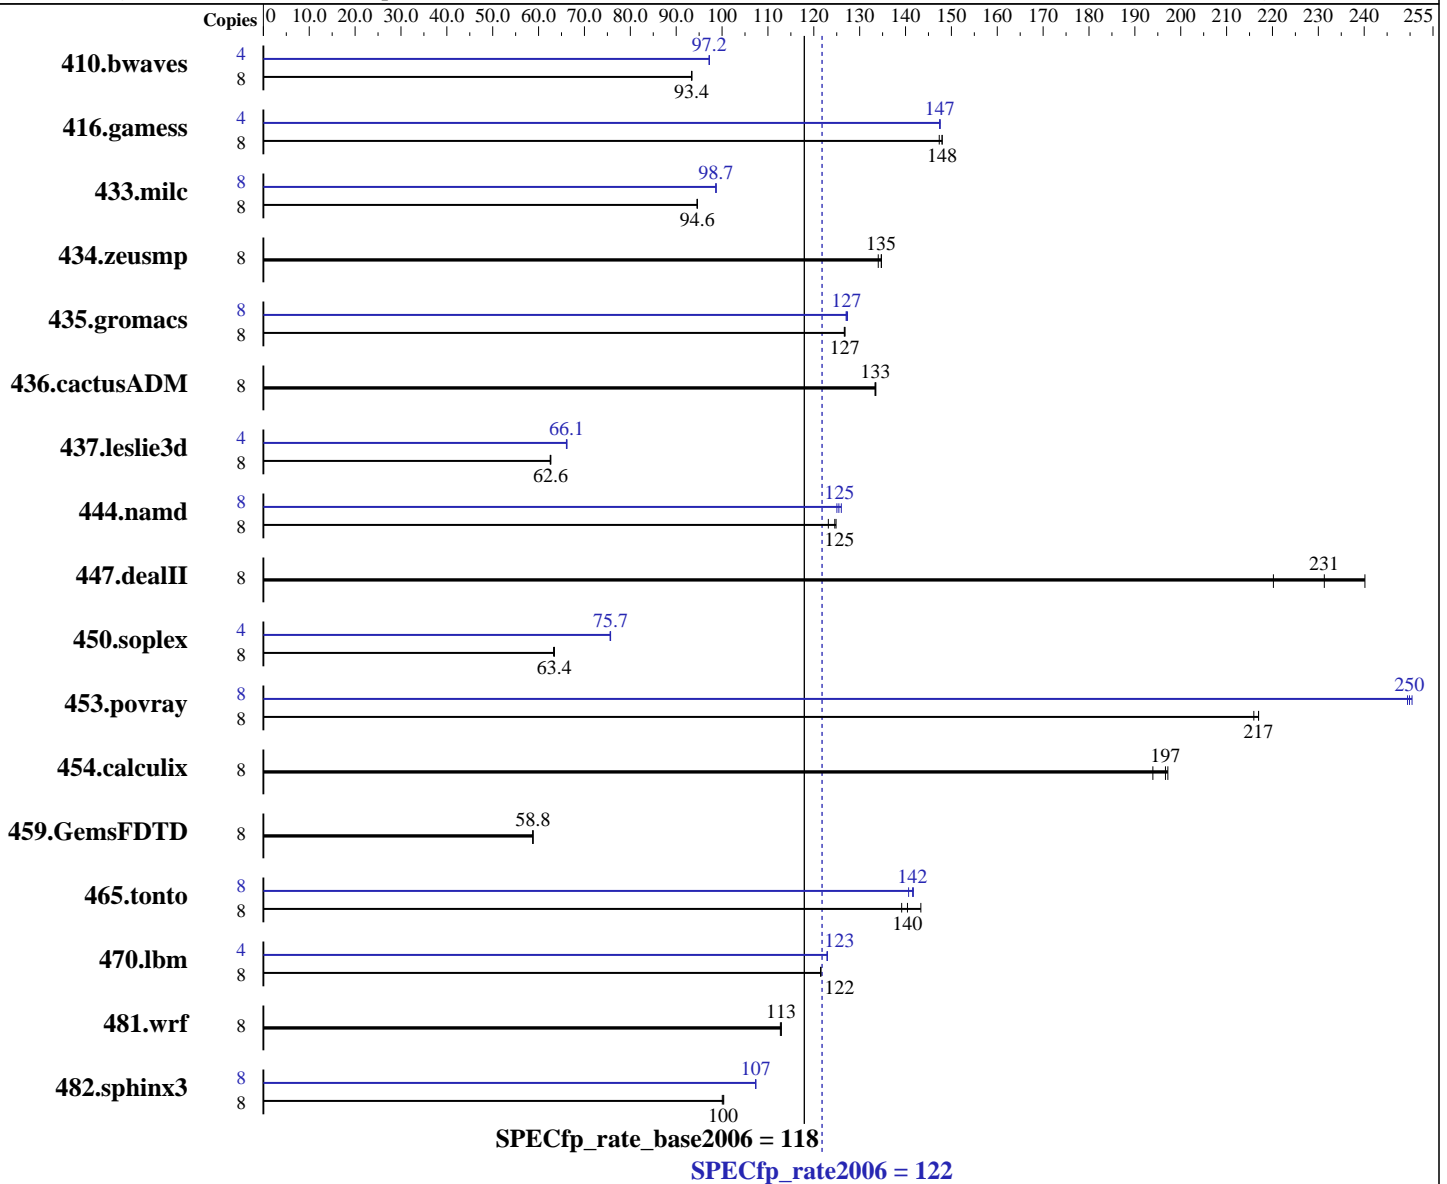

Hardware

CPU Name: Intel Xeon E3-1280
 CPU Characteristics: Intel Turbo Boost Technology up to 3.9 GHz
 CPU MHz: 3500
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86_64),
Kernel 2.6.32.12-0.7-default
 Compiler: Intel C++ Intel 64 Compiler XE for applications running on Intel 64
Version 12.0.1.116 Build 20101116
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp_rate2006 = 122

ASUS RS300-E7(P8B-E/4L) Server System
(Intel Xeon E3-1280, 3.50 GHz)

SPECfp_rate_base2006 = 118

CPU2006 license: 9016

Test date: Mar-2011

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Apr-2011

Tested by: ASUSTeK Computer Inc.

Software Availability: Jan-2011

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 8 GB (2 x 4 GB 2Rx8 PC3L-10600E-9, ECC)
Disk Subsystem: Seagate ST3500320AS 1 x 500 GB SATA, 7200 RPM
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	8	1165	93.3	<u>1164</u>	<u>93.4</u>	1164	93.4	4	559	97.2	<u>559</u>	<u>97.2</u>	559	97.2		
416.gamess	8	1063	147	<u>1059</u>	<u>148</u>	1058	148	4	531	148	<u>531</u>	<u>147</u>	531	147		
433.milc	8	<u>776</u>	<u>94.6</u>	776	94.6	777	94.6	8	744	98.7	<u>744</u>	<u>98.7</u>	745	98.6		
434.zeusmp	8	540	135	543	134	<u>540</u>	<u>135</u>	8	540	135	543	134	<u>540</u>	<u>135</u>		
435.gromacs	8	451	127	<u>451</u>	<u>127</u>	451	127	8	<u>449</u>	<u>127</u>	450	127	449	127		
436.cactusADM	8	716	134	<u>716</u>	<u>133</u>	717	133	8	716	134	<u>716</u>	<u>133</u>	717	133		
437.leslie3d	8	1200	62.7	1203	62.5	<u>1201</u>	<u>62.6</u>	4	<u>569</u>	<u>66.1</u>	569	66.1	568	66.2		
444.namd	8	<u>515</u>	<u>125</u>	521	123	514	125	8	509	126	<u>511</u>	<u>125</u>	513	125		
447.dealII	8	381	240	416	220	<u>396</u>	<u>231</u>	8	381	240	416	220	<u>396</u>	<u>231</u>		
450.soplex	8	<u>1052</u>	<u>63.4</u>	1055	63.3	1051	63.5	4	441	75.6	441	75.7	<u>441</u>	<u>75.7</u>		
453.povray	8	<u>196</u>	<u>217</u>	196	217	197	216	8	170	250	171	249	<u>170</u>	<u>250</u>		
454.calculix	8	335	197	<u>336</u>	<u>197</u>	340	194	8	335	197	<u>336</u>	<u>197</u>	340	194		
459.GemsFDTD	8	1445	58.7	1443	58.8	<u>1445</u>	<u>58.8</u>	8	1445	58.7	1443	58.8	<u>1445</u>	<u>58.8</u>		
465.tonto	8	<u>561</u>	<u>140</u>	549	143	566	139	8	560	141	<u>556</u>	<u>142</u>	555	142		
470.lbm	8	904	122	<u>905</u>	<u>122</u>	905	122	4	447	123	<u>447</u>	<u>123</u>	447	123		
481.wrf	8	793	113	791	113	<u>791</u>	<u>113</u>	8	793	113	791	113	<u>791</u>	<u>113</u>		
482.sphinx3	8	1558	100	1554	100	<u>1556</u>	<u>100</u>	8	<u>1453</u>	<u>107</u>	1453	107	1453	107		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
taskset was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
Hugepages was not enabled

General Notes

Binaries compiled on RHEL5.5 with
binutils-2.17.50.0.6-14.el5



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp_rate2006 = 122

ASUS RS300-E7(P8B-E/4L) Server System
(Intel Xeon E3-1280, 3.50 GHz)

SPECfp_rate_base2006 = 118

CPU2006 license: 9016

Test date: Mar-2011

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Apr-2011

Tested by: ASUSTeK Computer Inc.

Software Availability: Jan-2011

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -noFOR_main
 436.cactusADM: -DSPEC_CPU_LP64 -noFOR_main
 437.lelie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -noFOR_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -ansi-alias

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -ansi-alias

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -ansi-alias



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp_rate2006 = 122

ASUS RS300-E7(P8B-E/4L) Server System
(Intel Xeon E3-1280, 3.50 GHz)

SPECfp_rate_base2006 = 118

CPU2006 license: 9016

Test date: Mar-2011

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Apr-2011

Tested by: ASUSTeK Computer Inc.

Software Availability: Jan-2011

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

470.lbm: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
-ansi-alias -opt-prefetch -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp_rate2006 = 122

ASUS RS300-E7(P8B-E/4L) Server System
(Intel Xeon E3-1280, 3.50 GHz)

SPECfp_rate_base2006 = 118

CPU2006 license: 9016

Test date: Mar-2011

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Apr-2011

Tested by: ASUSTeK Computer Inc.

Software Availability: Jan-2011

Peak Optimization Flags (Continued)

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.deallI: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-static -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp_rate2006 = 122

ASUS RS300-E7(P8B-E/4L) Server System
(Intel Xeon E3-1280, 3.50 GHz)

SPECfp_rate_base2006 = 118

CPU2006 license: 9016

Test date: Mar-2011

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Apr-2011

Tested by: ASUSTeK Computer Inc.

Software Availability: Jan-2011

Peak Optimization Flags (Continued)

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/ASUSTekPlatform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/ASUSTekPlatform.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 17:16:53 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 April 2011.