



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 1017C-TF (X9SCL-F, Intel Xeon E3-1280)

SPECfp®_rate2006 = 116

SPECfp_rate_base2006 = 112

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Apr-2011

Hardware Availability: Apr-2011

Software Availability: Jan-2011

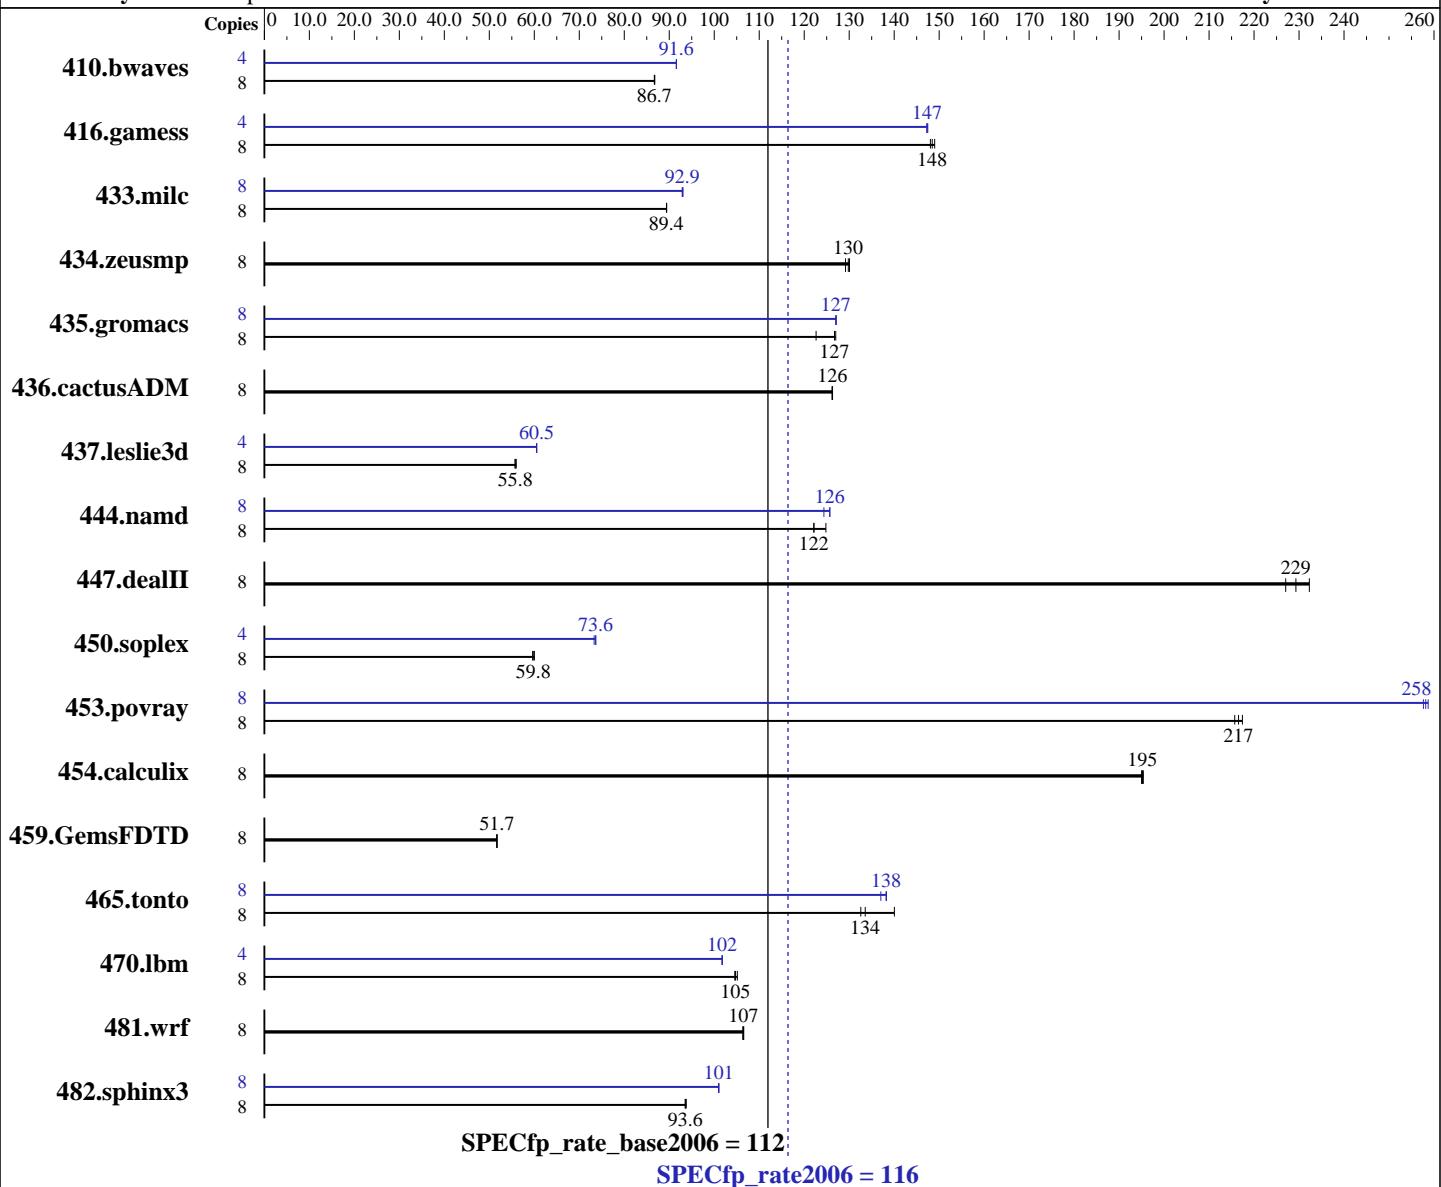

Hardware

CPU Name: Intel Xeon E3-1280
CPU Characteristics: Intel Turbo Boost Technology up to 3.90 GHz
CPU MHz: 3500
FPU: Integrated
CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable: 1 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64) SP1
Compiler: Kernel 2.6.32.12-0.7-default
Auto Parallel: Intel C++ and Fortran Intel 64 Compiler XE
File System: for applications running on Intel 64
System State: Version 12.0.1.116 Build 20101116
Base Pointers: No
ext3
Run level 3 (multi-user)
64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 1017C-TF (X9SCL-F, Intel Xeon E3-1280)

SPECfp_rate2006 = 116

SPECfp_rate_base2006 = 112

CPU2006 license: 001176

Test date: Apr-2011

Test sponsor: Supermicro

Hardware Availability: Apr-2011

Tested by: Supermicro

Software Availability: Jan-2011

L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 16 GB (4 x 4 GB 2Rx8 PC3-10600R-9, ECC)
 Disk Subsystem: 1 x 500 GB SATA II, 7200 RPM
 Other Hardware: None

Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1253	86.8	<u>1254</u>	86.7	1254	86.7	4	594	91.6	593	91.6	594	91.6
416.gamess	8	1055	148	1051	149	1058	148	4	531	147	532	147	532	147
433.milc	8	822	89.4	821	89.4	822	89.4	8	789	93.1	790	92.9	790	92.9
434.zeusmp	8	564	129	561	130	560	130	8	564	129	561	130	560	130
435.gromacs	8	466	123	450	127	451	127	8	449	127	450	127	450	127
436.cactusADM	8	758	126	757	126	757	126	8	758	126	757	126	757	126
437.leslie3d	8	1349	55.7	1348	55.8	1343	56.0	4	622	60.5	621	60.5	621	60.5
444.namd	8	514	125	525	122	525	122	8	510	126	516	124	510	126
447.dealII	8	403	227	399	229	394	232	8	403	227	399	229	394	232
450.soplex	8	1116	59.8	1119	59.6	1112	60.0	4	455	73.3	453	73.6	453	73.7
453.povray	8	197	217	197	216	196	217	8	165	259	165	258	165	258
454.calculix	8	338	195	338	195	338	195	8	338	195	338	195	338	195
459.GemsFDTD	8	1641	51.7	1642	51.7	1644	51.6	8	1641	51.7	1642	51.7	1644	51.6
465.tonto	8	562	140	594	133	589	134	8	569	138	574	137	570	138
470.lbm	8	1045	105	1049	105	1051	105	4	540	102	540	102	540	102
481.wrf	8	839	107	839	107	840	106	8	839	107	839	107	840	106
482.sphinx3	8	1662	93.8	1666	93.6	1667	93.6	8	1544	101	1543	101	1544	101

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
 numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
 Hugepages was enabled with the following:
 nodev /mnt/hugepages hugetlbfs defaults 0 0' added to /etc/fstab
 echo 3600 > /proc/sys/vm/nr_hugepages
 export HUGETLB_MORECORE=yes



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 1017C-TF (X9SCL-F, Intel Xeon E3-1280)

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

SPECfp_rate2006 = 116

SPECfp_rate_base2006 = 112

Test date: Apr-2011

Hardware Availability: Apr-2011

Software Availability: Jan-2011

Platform Notes

Fan speed set to Full Speed in BIOS Setup.

General Notes

Binaries compiled on RHEL5.5 with binutils-2.17.50.0.6-14.el5

Base Compiler Invocation

C benchmarks:

 icc -m64

C++ benchmarks:

 icpc -m64

Fortran benchmarks:

 ifort -m64

Benchmarks using both Fortran and C:

 icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

 -xAVX -ipo -O3 -no-prec-div -static -ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 1017C-TF (X9SCL-F, Intel Xeon E3-1280)

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

SPECfp_rate2006 = 116

SPECfp_rate_base2006 = 112

Test date: Apr-2011

Hardware Availability: Apr-2011

Software Availability: Jan-2011

Base Optimization Flags (Continued)

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -ansi-alias

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -ansi-alias

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 1017C-TF (X9SCL-F, Intel Xeon E3-1280)

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

SPECfp_rate2006 = 116

SPECfp_rate_base2006 = 112

Test date: Apr-2011

Hardware Availability: Apr-2011

Software Availability: Jan-2011

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

470.lbm: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
-ansi-alias -opt-prefetch -auto-ilp32

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll12

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
-B /usr/share/libhugetlbfss/ -Wl,-hugetlbfss-link=BDT

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -ansi-alias
-B /usr/share/libhugetlbfss/ -Wl,-melf_x86_64 -Wl,-hugetlbfss-link=BDT

Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll12
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div
-B /usr/share/libhugetlbfss/ -Wl,-melf_x86_64 -Wl,-hugetlbfss-link=BDT

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -auto
-inline-calloc -opt-malloc-options=3
-B /usr/share/libhugetlbfss/ -Wl,-melf_x86_64 -Wl,-hugetlbfss-link=BDT

Benchmarks using both Fortran and C:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 1017C-TF (X9SCL-F, Intel Xeon E3-1280)

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

SPECfp_rate2006 = 116

SPECfp_rate_base2006 = 112

Test date: Apr-2011

Hardware Availability: Apr-2011

Software Availability: Jan-2011

Peak Optimization Flags (Continued)

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-static -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>
<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110308.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>
<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110308.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 21:05:04 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 10 May 2011.