



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

### SPECfp<sup>®</sup>\_rate2006 = 1050

PRIMERGY RX900 S2, Intel Xeon E7-8837, 2.67 GHz

### SPECfp\_rate\_base2006 = 981

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: May-2011

Hardware Availability: Jun-2011

Software Availability: Jan-2011

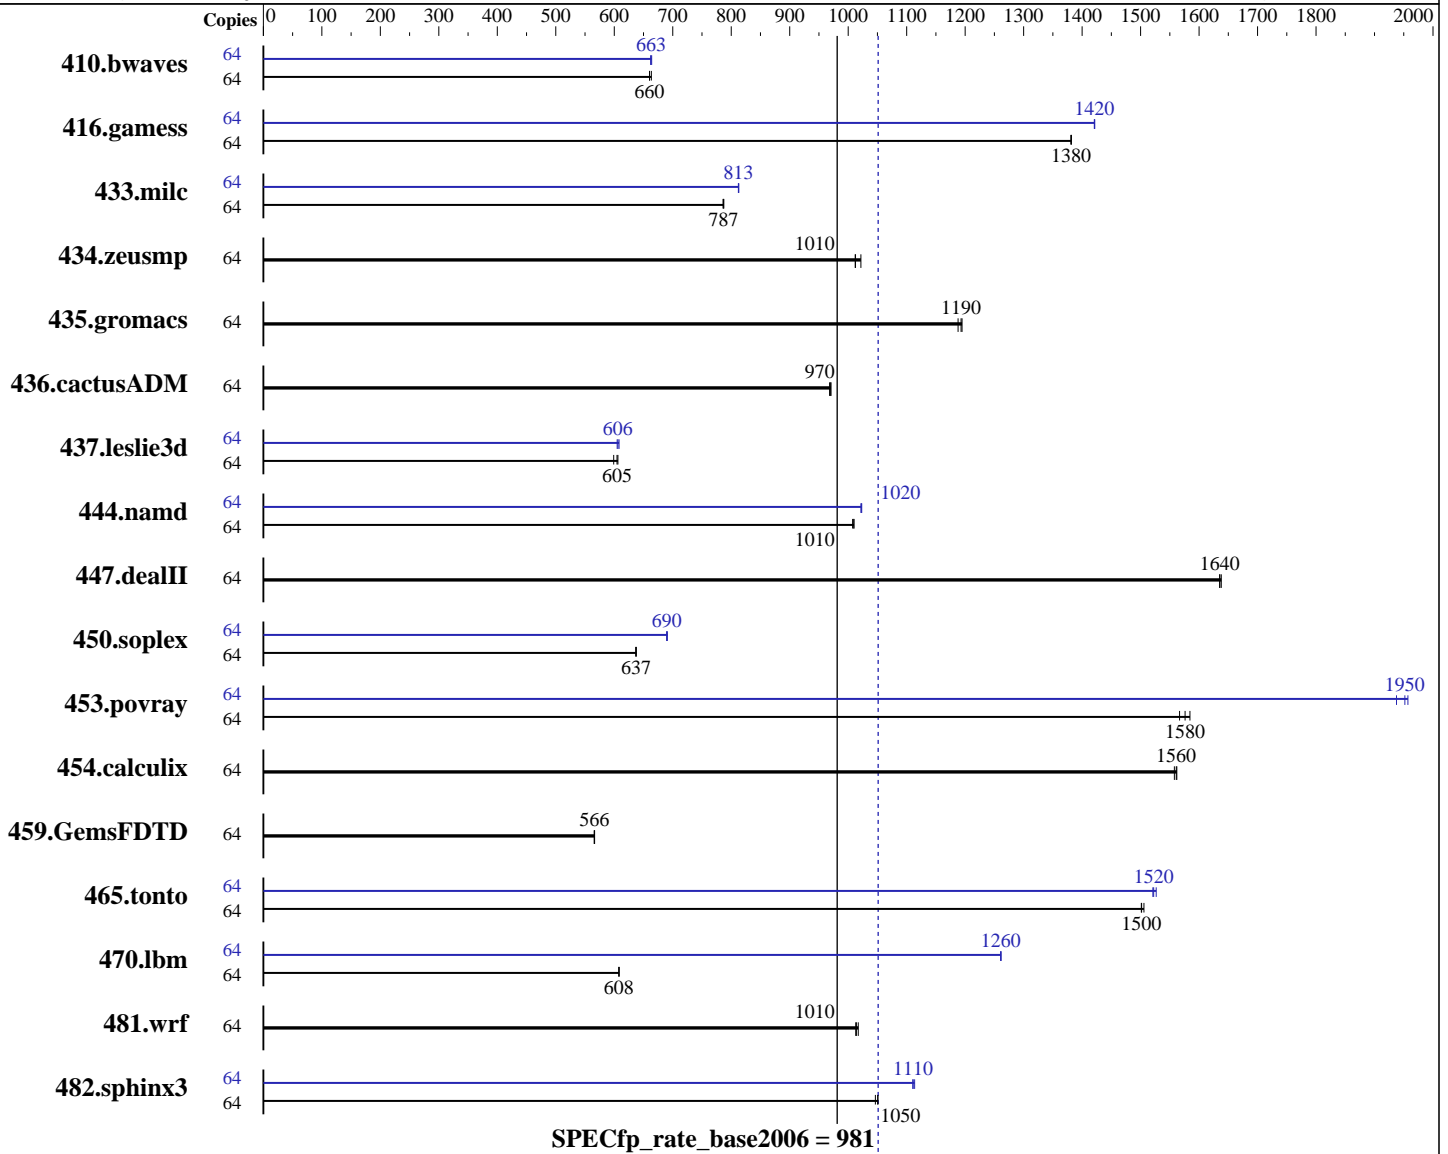

### Hardware

CPU Name: Intel Xeon E7-8837  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz  
 CPU MHz: 2667  
 FPU: Integrated  
 CPU(s) enabled: 64 cores, 8 chips, 8 cores/chip  
 CPU(s) orderable: 4,6,8 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 SP1(x86\_64), Kernel 2.6.32.12-0.7-default  
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.1.116 Build 20101116  
 Auto Parallel: No  
 File System: ext2  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp\_rate2006 = 1050

PRIMERGY RX900 S2, Intel Xeon E7-8837, 2.67 GHz

SPECfp\_rate\_base2006 = 981

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: May-2011

Hardware Availability: Jun-2011

Software Availability: Jan-2011

L3 Cache: 24 MB I+D on chip per chip  
Other Cache: None  
Memory: 1 TB (128 x 8 GB 4Rx8 PC3-10600R-9, ECC, running at 1066 MHz)  
Disk Subsystem: 2 x 147 GB (SAS, 15000RPM, RAID0)  
Other Hardware: None

Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	64	1311	663	<u>1317</u>	<u>660</u>	1317	660	64	<u>1312</u>	<u>663</u>	1310	664	1313	662
416.gamess	64	907	1380	907	1380	<u>907</u>	<u>1380</u>	64	882	1420	881	1420	<u>882</u>	<u>1420</u>
433.milc	64	746	787	<u>747</u>	<u>787</u>	747	786	64	723	813	<u>723</u>	<u>813</u>	723	812
434.zeusmp	64	575	1010	<u>575</u>	<u>1010</u>	570	1020	64	575	1010	<u>575</u>	<u>1010</u>	570	1020
435.gromacs	64	382	1190	<u>383</u>	<u>1190</u>	385	1190	64	382	1190	<u>383</u>	<u>1190</u>	385	1190
436.cactusADM	64	788	971	790	968	<u>788</u>	<u>970</u>	64	788	971	790	968	<u>788</u>	<u>970</u>
437.leslie3d	64	992	606	<u>995</u>	<u>605</u>	1004	599	64	994	605	989	608	<u>992</u>	<u>606</u>
444.namd	64	509	1010	508	1010	<u>508</u>	<u>1010</u>	64	502	1020	502	1020	<u>502</u>	<u>1020</u>
447.dealII	64	448	1640	447	1640	<u>448</u>	<u>1640</u>	64	448	1640	447	1640	<u>448</u>	<u>1640</u>
450.soplex	64	<u>838</u>	<u>637</u>	838	637	837	638	64	773	691	774	690	<u>774</u>	<u>690</u>
453.povray	64	<u>216</u>	<u>1580</u>	217	1570	215	1580	64	174	1960	<u>174</u>	<u>1950</u>	176	1940
454.calculix	64	338	1560	339	1560	<u>338</u>	<u>1560</u>	64	338	1560	339	1560	<u>338</u>	<u>1560</u>
459.GemsFDTD	64	1200	566	1199	566	<u>1200</u>	<u>566</u>	64	1200	566	1199	566	<u>1200</u>	<u>566</u>
465.tonto	64	419	1500	<u>419</u>	<u>1500</u>	418	1510	64	414	1520	412	1530	<u>414</u>	<u>1520</u>
470.lbm	64	1446	608	<u>1446</u>	<u>608</u>	1447	608	64	698	1260	697	1260	<u>697</u>	<u>1260</u>
481.wrf	64	706	1010	<u>705</u>	<u>1010</u>	703	1020	64	706	1010	<u>705</u>	<u>1010</u>	703	1020
482.sphinx3	64	1192	1050	<u>1187</u>	<u>1050</u>	1187	1050	64	1123	1110	1120	1110	<u>1123</u>	<u>1110</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

Large pages were not enabled for this run

The following command was used prior to run  
ulimit -s unlimited  
echo 1 > /proc/sys/vm/zone\_reclaim\_mode



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp\_rate2006 = 1050**

PRIMERGY RX900 S2, Intel Xeon E7-8837, 2.67 GHz

**SPECfp\_rate\_base2006 = 981**

**CPU2006 license:** 19  
**Test sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test date:** May-2011  
**Hardware Availability:** Jun-2011  
**Software Availability:** Jan-2011

## General Notes

Binaries were compiled on RHEL5.5

For information about Fujitsu please visit: <http://www.fujitsu.com>

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp\_rate2006 = 1050

PRIMERGY RX900 S2, Intel Xeon E7-8837, 2.67 GHz

SPECfp\_rate\_base2006 = 981

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: May-2011

Hardware Availability: Jun-2011

Software Availability: Jan-2011

## Base Optimization Flags (Continued)

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp\_rate2006 = 1050**

PRIMERGY RX900 S2, Intel Xeon E7-8837, 2.67 GHz

**SPECfp\_rate\_base2006 = 981**

**CPU2006 license:** 19

**Test date:** May-2011

**Test sponsor:** Fujitsu

**Hardware Availability:** Jun-2011

**Tested by:** Fujitsu

**Software Availability:** Jan-2011

## Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3  
-ansi-alias -opt-prefetch -static -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

Benchmarks using both Fortran and C:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp\_rate2006 = 1050**

PRIMERGY RX900 S2, Intel Xeon E7-8837, 2.67 GHz

**SPECfp\_rate\_base2006 = 981**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** May-2011

**Hardware Availability:** Jun-2011

**Software Availability:** Jan-2011

## Peak Optimization Flags (Continued)

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

[http://www.spec.org/cpu2006/flags/RX900S2\\_Platform.html](http://www.spec.org/cpu2006/flags/RX900S2_Platform.html)

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

[http://www.spec.org/cpu2006/flags/RX900S2\\_Platform.xml](http://www.spec.org/cpu2006/flags/RX900S2_Platform.xml)

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 20:12:50 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 24 May 2011.