



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

### SPECfp®\_rate2006 = 228

### Acer AW2000h-AW175h F1 (AMD Opteron 6128)

### SPECfp\_rate\_base2006 = 209

CPU2006 license: 97


Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: May-2011

Hardware Availability: Aug-2010

Software Availability: Jul-2010

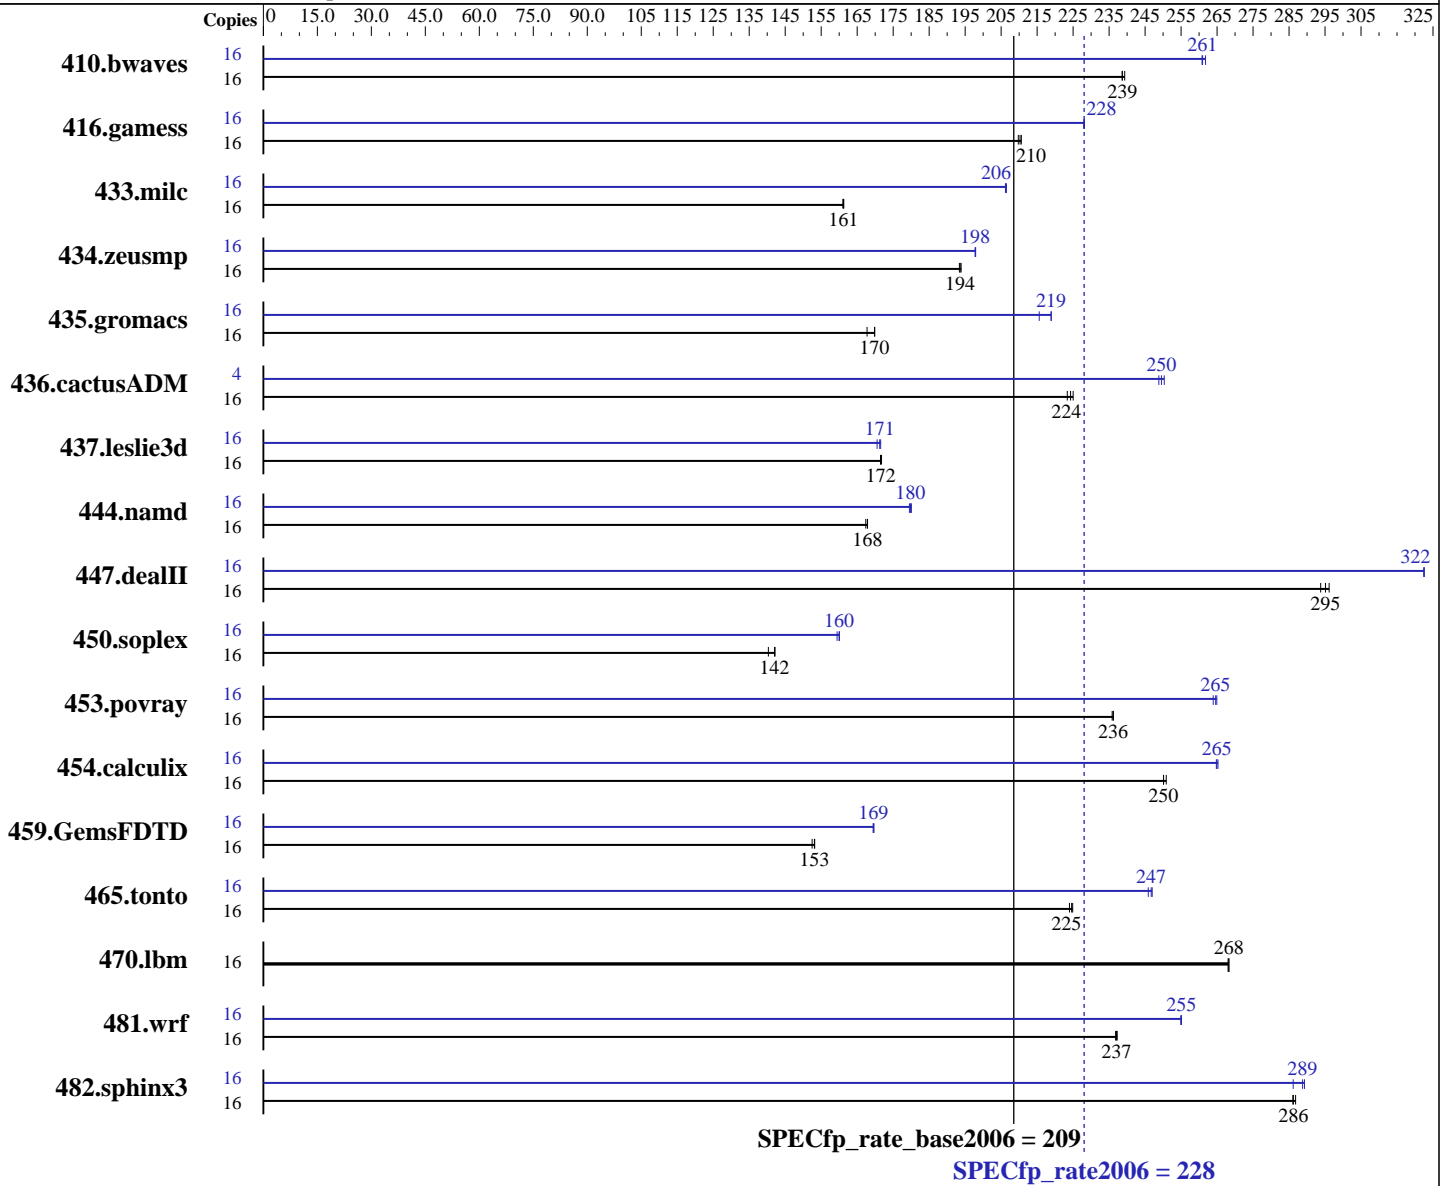

#### Hardware

CPU Name: AMD Opteron 6128  
 CPU Characteristics:  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core

#### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64) SP1, Kernel 2.6.32.12-0.7-default  
 Compiler: x86 Open64 4.2.4 Compiler Suite (from AMD)  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

SPECfp\_rate2006 = **228**

Acer AW2000h-AW175h F1 (AMD Opteron 6128)

SPECfp\_rate\_base2006 = 209

CPU2006 license: 97  
Test sponsor: Acer Incorporated  
Tested by: Acer Incorporated

Test date: May-2011  
Hardware Availability: Aug-2010  
Software Availability: Jul-2010

L3 Cache: 12 MB I+D on chip per chip, 6 MB shared / 4 cores  
Other Cache: None  
Memory: 64 GB (16 x 4 GB 2Rx8 PC3-10600R-9, ECC)  
Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
Other Hardware: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	911	239	909	239	<u>911</u>	<u>239</u>	16	831	262	834	261	<u>833</u>	<u>261</u>
416.gamess	16	1487	211	1493	210	<u>1490</u>	<u>210</u>	16	<u>1373</u>	<u>228</u>	1373	228	1374	228
433.milc	16	<u>911</u>	<u>161</u>	911	161	912	161	16	712	206	<u>712</u>	<u>206</u>	712	206
434.zeusmp	16	753	193	<u>752</u>	<u>194</u>	751	194	16	736	198	736	198	<u>736</u>	<u>198</u>
435.gromacs	16	681	168	673	170	<u>673</u>	<u>170</u>	16	530	216	<u>522</u>	<u>219</u>	522	219
436.cactusADM	16	850	225	856	223	<u>852</u>	<u>224</u>	4	191	250	<u>192</u>	<u>250</u>	192	249
437.leslie3d	16	877	171	876	172	<u>877</u>	<u>172</u>	16	882	171	<u>878</u>	<u>171</u>	877	172
444.namd	16	767	167	<u>765</u>	<u>168</u>	764	168	16	715	180	<u>714</u>	<u>180</u>	713	180
447.dealII	16	623	294	618	296	<u>620</u>	<u>295</u>	16	567	323	568	322	<u>568</u>	<u>322</u>
450.soplex	16	951	140	939	142	<u>939</u>	<u>142</u>	16	837	159	<u>834</u>	<u>160</u>	834	160
453.povray	16	360	236	<u>360</u>	<u>236</u>	361	236	16	<u>322</u>	<u>265</u>	321	265	323	264
454.calculix	16	528	250	<u>528</u>	<u>250</u>	526	251	16	<u>498</u>	<u>265</u>	498	265	499	265
459.GemsFDTD	16	<u>1109</u>	<u>153</u>	1108	153	1113	152	16	1001	170	1002	169	<u>1002</u>	<u>169</u>
465.tonto	16	703	224	700	225	<u>701</u>	<u>225</u>	16	<u>638</u>	<u>247</u>	637	247	640	246
470.lbm	16	<u>819</u>	<u>268</u>	819	268	820	268	16	<u>819</u>	<u>268</u>	819	268	820	268
481.wrf	16	753	237	755	237	<u>754</u>	<u>237</u>	16	701	255	<u>701</u>	<u>255</u>	701	255
482.sphinx3	16	1090	286	1087	287	<u>1090</u>	<u>286</u>	16	1078	289	<u>1080</u>	<u>289</u>	1090	286

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit  
  
Set vm/nr\_hugepages=14336 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Acer Incorporated**

**SPECfp\_rate2006 = 228**

**Acer AW2000h-AW175h F1 (AMD Opteron 6128)**

**SPECfp\_rate\_base2006 = 209**

**CPU2006 license:** 97

**Test sponsor:** Acer Incorporated

**Tested by:** Acer Incorporated

**Test date:** May-2011

**Hardware Availability:** Aug-2010

**Software Availability:** Jul-2010

## General Notes

Environment variables set by runspec before the start of the run:

HUGETLB\_LIMIT = "896"

LD\_LIBRARY\_PATH = "/usr/cpu2006/amd1002-rate-libs-revC/64:/usr/cpu2006/amd1002-rate-libs-revC/32"

OMP\_NUM\_THREADS = "4"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at

<http://developer.amd.com/cpu/open64>

Binaries were compiled on SLES10 SP2 with binutils 2.18

This result was measured on the Gateway GW2000h-GW175h F1.

The Acer AW2000h-AW175h F1 and Gateway GW2000h-GW175h F1 are electronically equivalent.

## Base Compiler Invocation

C benchmarks:

opencc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

opencc openf95

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64  
 436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX -DSPEC\_CPU\_CASE\_FLAG  
 -fno-second-underscore  
 482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Acer Incorporated**

**SPECfp\_rate2006 = 228**

**Acer AW2000h-AW175h F1 (AMD Opteron 6128)**

**SPECfp\_rate\_base2006 = 209**

**CPU2006 license:** 97

**Test date:** May-2011

**Test sponsor:** Acer Incorporated

**Hardware Availability:** Aug-2010

**Tested by:** Acer Incorporated

**Software Availability:** Jul-2010

## Base Optimization Flags

C benchmarks:

`-march=barcelona -mso -Ofast -OPT:malloc_alg=1 -HP:bdt=2m`

C++ benchmarks:

`-march=barcelona -mso -Ofast -static -INLINE:aggressive=on  
-OPT:malloc_alg=1 -HP:bdt=2m`

Fortran benchmarks:

`-march=barcelona -mso -Ofast -HP`

Benchmarks using both Fortran and C:

`-march=barcelona -mso -Ofast -OPT:malloc_alg=1 -HP:bdt=2m -HP`

## Peak Compiler Invocation

C benchmarks:

`opencc`

C++ benchmarks:

`openCC`

Fortran benchmarks:

`openf95`

Benchmarks using both Fortran and C:

`opencc openf95`

## Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`  
416.gamess: `-DSPEC_CPU_LP64`  
433.milc: `-DSPEC_CPU_LP64`  
434.zeusmp: `-DSPEC_CPU_LP64`  
435.gromacs: `-DSPEC_CPU_LP64`  
436.cactusADM: `-DSPEC_CPU_LP64 -fno-second-underscore`  
437.leslie3d: `-DSPEC_CPU_LP64`  
444.namd: `-DSPEC_CPU_LP64`  
453.povray: `-DSPEC_CPU_LP64`  
454.calculix: `-DSPEC_CPU_LP64`  
459.GemsFDTD: `-DSPEC_CPU_LP64`  
465.tonto: `-DSPEC_CPU_LP64`  
470.lbm: `-DSPEC_CPU_LP64`  
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG  
-fno-second-underscore`  
482.sphinx3: `-DSPEC_CPU_LP64`



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Acer Incorporated**

**SPECfp\_rate2006 = 228**

**Acer AW2000h-AW175h F1 (AMD Opteron 6128)**

**SPECfp\_rate\_base2006 = 209**

**CPU2006 license:** 97

**Test date:** May-2011

**Test sponsor:** Acer Incorporated

**Hardware Availability:** Aug-2010

**Tested by:** Acer Incorporated

**Software Availability:** Jul-2010

## Peak Optimization Flags

### C benchmarks:

433.milc: -march=barcelona -mso -Ofast -CG:movnti=1  
-CG:local\_sched\_alg=1 -CG:locs\_shallow\_depth=1  
-HP:bdt=2m:heap=2m -LNO:prefetch=3

470.lbm: basepeak = yes

482.sphinx3: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -OPT:malloc\_alg=2  
-CG:sse\_cse\_regs=0 -CG:locs\_shallow\_depth=1 -CG:cmp\_peep=on  
-CG:local\_sched\_alg=1 -INLINE:aggressive=on

### C++ benchmarks:

444.namd: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -LNO:ignore\_feedback=off  
-CG:local\_sched\_alg=2 -CG:load\_exe=0 -CG:compute\_to=on  
-OPT:unroll\_size=256 -fno-exceptions -HP:bdt=2m:heap=2m

447.deallI: -march=barcelona -mso -Ofast -static -INLINE:aggressive=on  
-LNO:opt=0 -fno-emit-exceptions -m32  
-OPT:unroll\_times\_max=8 -OPT:unroll\_size=256  
-OPT:unroll\_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on  
-CG:cmp\_peep=on -TENV:frame\_pointer=off

450.soplex: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -INLINE:aggressive=on  
-OPT:IEEE\_arith=3 -OPT:IEEE\_NaN\_Inf=off  
-OPT:fold\_unsigned\_relops=on -OPT:malloc\_alg=1  
-CG:load\_exe=0 -fno-exceptions -m32 -HP:bdt=2m

453.povray: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on

### Fortran benchmarks:

410.bwaves: -march=barcelona -mso -O3 -OPT:Ofast -OPT:treeheight=on  
-LNO:blocking=off -LNO:prefetch\_ahead=5  
-LNO:ignore\_feedback=off -WOPT:aggstr=0 -HP:bdt=2m:heap=2m  
-CG:cmp\_peep=on

416.gamess: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0  
-LNO:prefetch=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll\_size=256  
-HP:bdt=2m:heap=2m

434.zeusmp: -march=barcelona -mso -Ofast -LNO:blocking=off  
-LNO:interchange=off -OPT:treeheight=on -OPT:unroll\_size=256  
-CG:cmp\_peep=on -GRA:prioritize\_by\_density=on -HP

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Acer Incorporated**

**SPECfp\_rate2006 = 228**

**Acer AW2000h-AW175h F1 (AMD Opteron 6128)**

**SPECfp\_rate\_base2006 = 209**

**CPU2006 license:** 97

**Test date:** May-2011

**Test sponsor:** Acer Incorporated

**Hardware Availability:** Aug-2010

**Tested by:** Acer Incorporated

**Software Availability:** Jul-2010

## Peak Optimization Flags (Continued)

437.leslie3d: -march=barcelona -mso -Ofast -HP:bdt=2m:heap=2m

459.GemsFDTD: -march=barcelona -mso -Ofast -LNO:fission=2  
-LNO:prefetch\_ahead=1 -CG:load\_exe=0 -CG:local\_sched\_alg=1  
-HP

465.tonto: -march=barcelona -mso -Ofast  
-OPT:alias=no\_f90\_pointer\_alias -LNO:blocking=off  
-CG:load\_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -mso -Ofast -OPT:rsqrt=2  
-HP:bdt=2m:heap=2m

436.cactusADM: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -apo -LNO:prefetch\_ahead=1  
-HP:bdt=2m:heap=2m -LANG:heap\_allocation\_threshold=100

454.calculix: -march=barcelona -mso -Ofast -CG:load\_exe=0  
-CG:ptr\_load\_use=0 -CG:local\_sched\_alg=2 -CG:compute\_to=on  
-LNO:prefetch\_ahead=30 -WOPT:unroll=2  
-GRA:optimize\_boundary=on -HP:bdt=2m:heap=2m

481.wrf: -march=barcelona -mso -Ofast -LNO:blocking=off  
-LNO:prefetch\_ahead=10 -LANG:copyinout=off  
-IPA:callee\_limit=5000 -GRA:prioritize\_by\_density=on -m3dnow  
-HP

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.html>  
<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.xml>  
<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 17:17:08 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 10 June 2011.