



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp®_rate2006 = 646

IBM System x3850 X5 (Intel Xeon E7-8867L)

SPECfp_rate_base2006 = 623

CPU2006 license: 11


Test date: May-2011

Test sponsor: IBM Corporation

Hardware Availability: May-2011

Tested by: IBM Corporation

Software Availability: Jan-2011

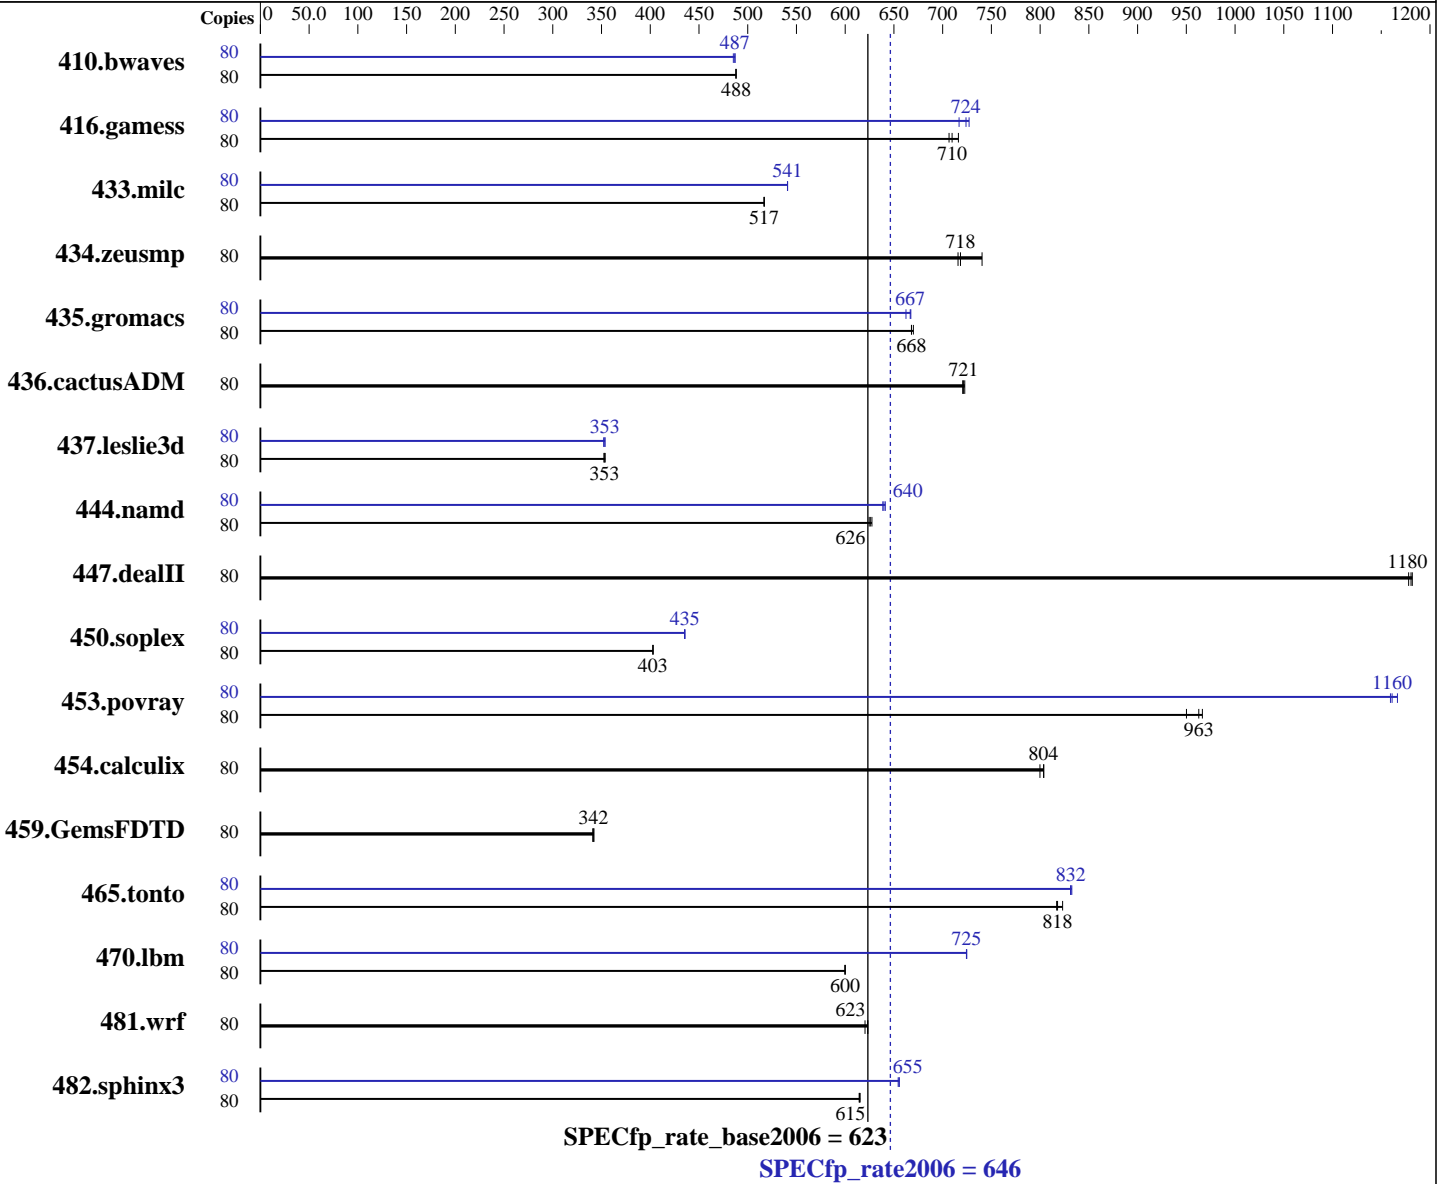

Hardware

CPU Name: Intel Xeon E7-8867L
 CPU Characteristics: Intel Turbo Boost Technology up to 2.53 GHz
 CPU MHz: 2133
 FPU: Integrated
 CPU(s) enabled: 40 cores, 4 chips, 10 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2,3,4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86_64), Kernel 2.6.32.12-0.7-default
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.1.116 Build 20101116
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = **646**

IBM System x3850 X5 (Intel Xeon E7-8867L)

SPECfp_rate_base2006 = **623**

CPU2006 license: 11

Test date: May-2011

Test sponsor: IBM Corporation

Hardware Availability: May-2011

Tested by: IBM Corporation

Software Availability: Jan-2011

L3 Cache: 30 MB I+D on chip per chip
Other Cache: None
Memory: 512 GB (64 x 8 GB 4Rx8 PC3-8500R-7, ECC)
Disk Subsystem: 2 x 147 GB 15k RPM SAS, RAID 0
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	80	2228	488	2227	488	<u>2228</u>	<u>488</u>	80	2240	485	2232	487	<u>2234</u>	<u>487</u>
416.gamess	80	2187	716	2217	707	<u>2207</u>	<u>710</u>	80	2185	717	<u>2164</u>	<u>724</u>	2154	727
433.milc	80	1421	517	1421	517	<u>1421</u>	<u>517</u>	80	1358	541	1358	541	<u>1358</u>	<u>541</u>
434.zeusmp	80	1017	716	<u>1014</u>	<u>718</u>	983	740	80	1017	716	<u>1014</u>	<u>718</u>	983	740
435.gromacs	80	855	668	<u>855</u>	<u>668</u>	853	670	80	856	667	862	662	<u>857</u>	<u>667</u>
436.cactusADM	80	<u>1325</u>	<u>721</u>	1323	723	1327	721	80	<u>1325</u>	<u>721</u>	1323	723	1327	721
437.leslie3d	80	2133	353	2126	354	<u>2131</u>	<u>353</u>	80	<u>2128</u>	<u>353</u>	2135	352	2127	354
444.namd	80	<u>1025</u>	<u>626</u>	1027	625	1023	627	80	<u>1003</u>	<u>640</u>	1001	641	1005	639
447.dealII	80	774	1180	777	1180	<u>775</u>	<u>1180</u>	80	774	1180	777	1180	<u>775</u>	<u>1180</u>
450.soplex	80	<u>1656</u>	<u>403</u>	1656	403	1657	403	80	1532	436	<u>1533</u>	<u>435</u>	1533	435
453.povray	80	<u>442</u>	<u>963</u>	448	950	440	966	80	365	1170	367	1160	<u>367</u>	<u>1160</u>
454.calculix	80	825	800	821	804	<u>821</u>	<u>804</u>	80	825	800	821	804	<u>821</u>	<u>804</u>
459.GemsFDTD	80	<u>2484</u>	<u>342</u>	2480	342	2489	341	80	<u>2484</u>	<u>342</u>	2480	342	2489	341
465.tonto	80	964	817	956	823	<u>962</u>	<u>818</u>	80	946	833	<u>947</u>	<u>832</u>	947	831
470.lbm	80	<u>1832</u>	<u>600</u>	1833	600	1832	600	80	<u>1517</u>	<u>725</u>	1517	724	1517	725
481.wrf	80	1440	620	<u>1434</u>	<u>623</u>	1434	623	80	1440	620	<u>1434</u>	<u>623</u>	1434	623
482.sphinx3	80	2538	614	2534	615	<u>2536</u>	<u>615</u>	80	<u>2379</u>	<u>655</u>	2383	654	2379	655

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
echo 1 > /proc/sys/vm/zone_reclaim_mode
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 36000 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 646

IBM System x3850 X5 (Intel Xeon E7-8867L)

SPECfp_rate_base2006 = 623

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: May-2011

Hardware Availability: May-2011

Software Availability: Jan-2011

Platform Notes

BIOS Settings:
Turbo Boost Power Optimization set to Traditional

General Notes

Binaries were compiled on RHEL5.5

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 646

IBM System x3850 X5 (Intel Xeon E7-8867L)

SPECfp_rate_base2006 = 623

CPU2006 license: 11

Test date: May-2011

Test sponsor: IBM Corporation

Hardware Availability: May-2011

Tested by: IBM Corporation

Software Availability: Jan-2011

Base Optimization Flags (Continued)

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.deallI: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 646

IBM System x3850 X5 (Intel Xeon E7-8867L)

SPECfp_rate_base2006 = 623

CPU2006 license: 11

Test date: May-2011

Test sponsor: IBM Corporation

Hardware Availability: May-2011

Tested by: IBM Corporation

Software Availability: Jan-2011

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
-ansi-alias -opt-prefetch -static -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Benchmarks using both Fortran and C:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 646

IBM System x3850 X5 (Intel Xeon E7-8867L)

SPECfp_rate_base2006 = 623

CPU2006 license: 11

Test date: May-2011

Test sponsor: IBM Corporation

Hardware Availability: May-2011

Tested by: IBM Corporation

Software Availability: Jan-2011

Peak Optimization Flags (Continued)

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-static -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/IBM-platform-linux64-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/IBM-platform-linux64-revA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 18:06:46 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 7 June 2011.