



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp[®]_rate2006 = 261

Sun Fire X4270 M2 (Intel Xeon X5675 3.06 GHz)

SPECfp_rate_base2006 = 253

CPU2006 license: 6


Test date: May-2011

Test sponsor: Oracle Corporation

Hardware Availability: Mar-2011

Tested by: Oracle Corporation

Software Availability: Nov-2010

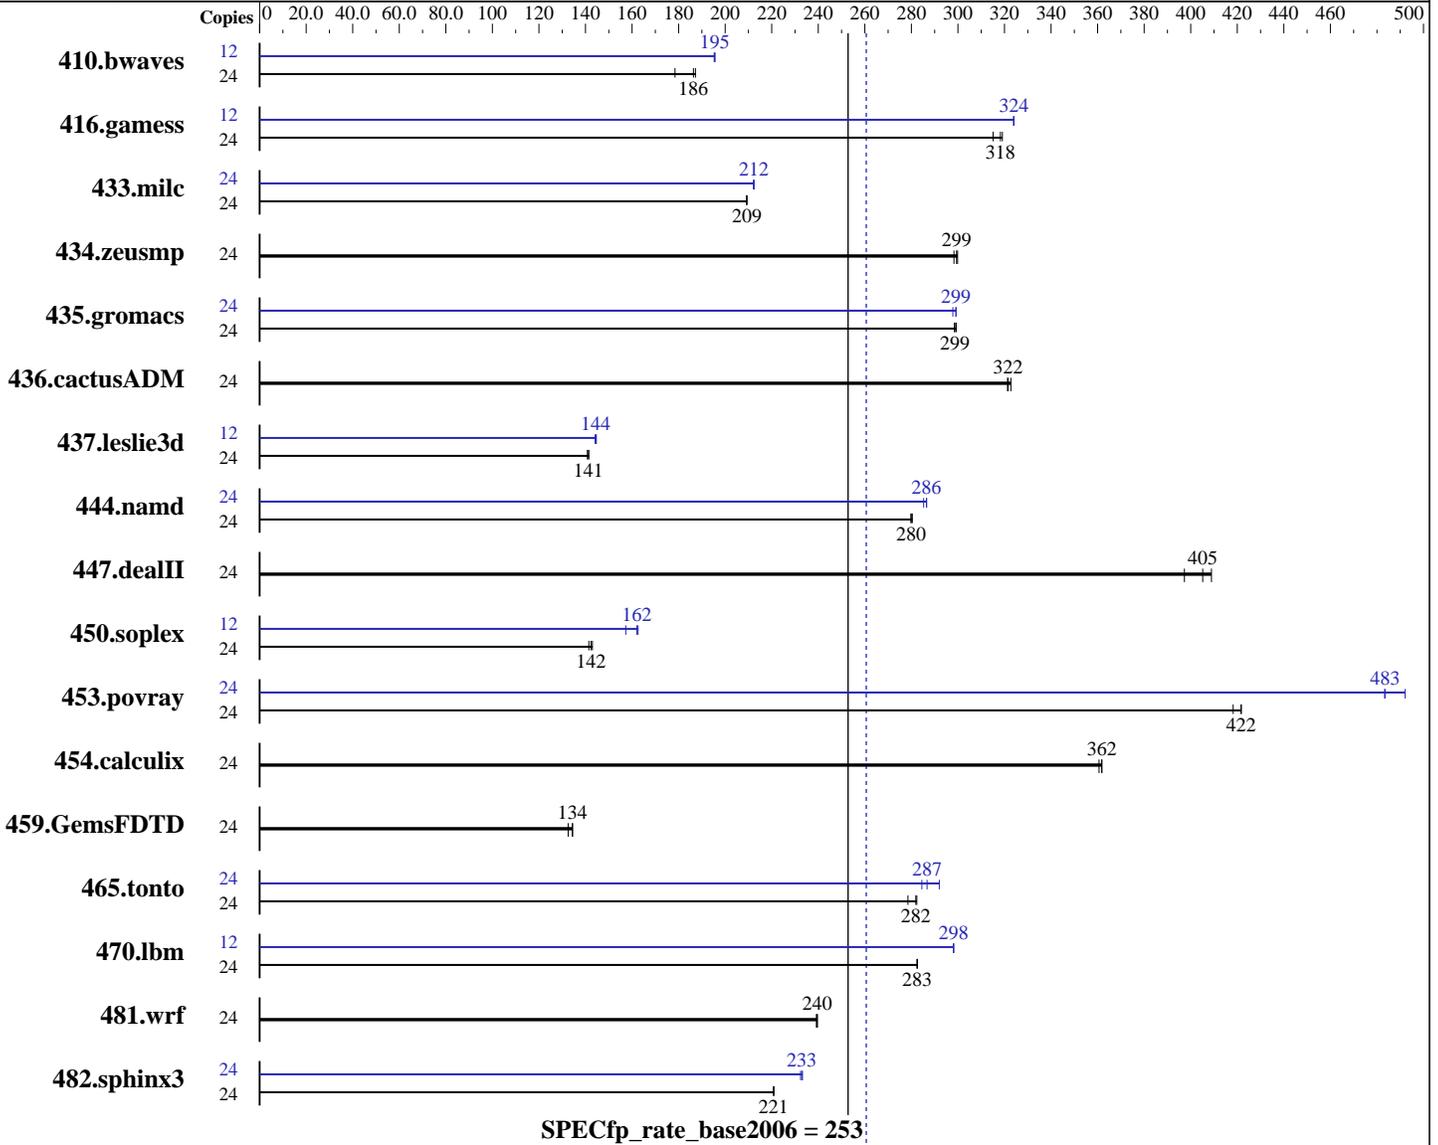

Hardware

CPU Name: Intel Xeon X5675
 CPU Characteristics: Intel Turbo Boost Technology up to 3.46 GHz
 CPU MHz: 3067
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Oracle Linux 5.5
 kernel 2.6.18-194.el5
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE
 for applications running on Intel 64
 Version 12.0.1.116 Build 20101116
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp_rate2006 = 261

Sun Fire X4270 M2 (Intel Xeon X5675 3.06 GHz)

SPECfp_rate_base2006 = 253

CPU2006 license: 6

Test date: May-2011

Test sponsor: Oracle Corporation

Hardware Availability: Mar-2011

Tested by: Oracle Corporation

Software Availability: Nov-2010

L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem: 1 x 300 GB 10000 RPM SAS2
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	1828	178	<u>1750</u>	<u>186</u>	1742	187	12	835	195	<u>834</u>	<u>195</u>	834	196
416.gamess	24	1473	319	1491	315	<u>1477</u>	<u>318</u>	12	725	324	<u>725</u>	<u>324</u>	726	324
433.milc	24	1053	209	<u>1052</u>	<u>209</u>	1052	209	24	1037	212	1038	212	<u>1038</u>	<u>212</u>
434.zeusmp	24	732	298	<u>729</u>	<u>299</u>	728	300	24	732	298	<u>729</u>	<u>299</u>	728	300
435.gromacs	24	573	299	<u>574</u>	<u>299</u>	574	298	24	575	298	<u>573</u>	<u>299</u>	573	299
436.cactusADM	24	889	323	893	321	<u>892</u>	<u>322</u>	24	889	323	893	321	<u>892</u>	<u>322</u>
437.leslie3d	24	1602	141	1596	141	<u>1596</u>	<u>141</u>	12	780	145	<u>781</u>	<u>144</u>	783	144
444.namd	24	688	280	686	280	<u>688</u>	<u>280</u>	24	675	285	<u>672</u>	<u>286</u>	672	287
447.dealII	24	671	409	691	397	<u>678</u>	<u>405</u>	24	671	409	691	397	<u>678</u>	<u>405</u>
450.soplex	24	1415	141	1400	143	<u>1406</u>	<u>142</u>	12	636	157	616	163	<u>617</u>	<u>162</u>
453.povray	24	<u>303</u>	<u>422</u>	303	422	305	418	24	<u>264</u>	<u>483</u>	264	483	259	492
454.calculix	24	547	362	<u>547</u>	<u>362</u>	549	361	24	547	362	<u>547</u>	<u>362</u>	549	361
459.GemsFDTD	24	1921	133	<u>1895</u>	<u>134</u>	1894	134	24	1921	133	<u>1895</u>	<u>134</u>	1894	134
465.tonto	24	<u>838</u>	<u>282</u>	836	282	848	279	24	<u>824</u>	<u>287</u>	830	285	809	292
470.lbm	24	1168	282	1167	283	<u>1167</u>	<u>283</u>	12	553	298	553	298	<u>553</u>	<u>298</u>
481.wrf	24	1119	240	1121	239	<u>1119</u>	<u>240</u>	24	1119	240	1121	239	<u>1119</u>	<u>240</u>
482.sphinx3	24	<u>2118</u>	<u>221</u>	2118	221	2117	221	24	2013	232	<u>2008</u>	<u>233</u>	2006	233

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
Hugepages was enabled with the following:
'nodev /mnt/hugepages hugetlbfs defaults 0 0' added to /etc/fstab
echo 10800 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp_rate2006 = 261

Sun Fire X4270 M2 (Intel Xeon X5675 3.06 GHz)

SPECfp_rate_base2006 = 253

CPU2006 license: 6

Test date: May-2011

Test sponsor: Oracle Corporation

Hardware Availability: Mar-2011

Tested by: Oracle Corporation

Software Availability: Nov-2010

Platform Notes

Load Default BIOS Settings and then change the following
Hardware Prefetch Enabled
Adjacent Cache Line Prefetch Enabled
L1 Data Prefetch Enabled
Data Reuse Optimization Disabled

General Notes

Binaries were compiled on RHEL5.5 with Binutils binutils-2.17.50.0.6-14.el5
This result is measured on Sun Fire X4170 M2 server.
Note that the Sun Fire X4170 M2 server and Sun Fire X4270 M2 server are electrically equivalent.

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp_rate2006 = 261

Sun Fire X4270 M2 (Intel Xeon X5675 3.06 GHz)

SPECfp_rate_base2006 = 253

CPU2006 license: 6

Test date: May-2011

Test sponsor: Oracle Corporation

Hardware Availability: Mar-2011

Tested by: Oracle Corporation

Software Availability: Nov-2010

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp_rate2006 = 261

Sun Fire X4270 M2 (Intel Xeon X5675 3.06 GHz)

SPECfp_rate_base2006 = 253

CPU2006 license: 6

Test date: May-2011

Test sponsor: Oracle Corporation

Hardware Availability: Mar-2011

Tested by: Oracle Corporation

Software Availability: Nov-2010

Peak Portability Flags (Continued)

470.lbm: -DSPEC_CPU_LP64

481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
-ansi-alias -opt-prefetch -static -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

459.GemsFDTD: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp_rate2006 = 261

Sun Fire X4270 M2 (Intel Xeon X5675 3.06 GHz)

SPECfp_rate_base2006 = 253

CPU2006 license: 6

Test date: May-2011

Test sponsor: Oracle Corporation

Hardware Availability: Mar-2011

Tested by: Oracle Corporation

Software Availability: Nov-2010

Peak Optimization Flags (Continued)

```
465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT
```

Benchmarks using both Fortran and C:

```
435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-static -auto-ilp32
```

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>
http://www.spec.org/cpu2006/flags/Oracle-platform-x86_64.20110622.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>
http://www.spec.org/cpu2006/flags/Oracle-platform-x86_64.20110622.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 17:28:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 21 June 2011.