



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS novascale bullion

SPECfp[®]_rate2006 = 2050

SPECfp_rate_base2006 = 1970

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Jun-2011

Hardware Availability: Sep-2011

Software Availability: Apr-2011

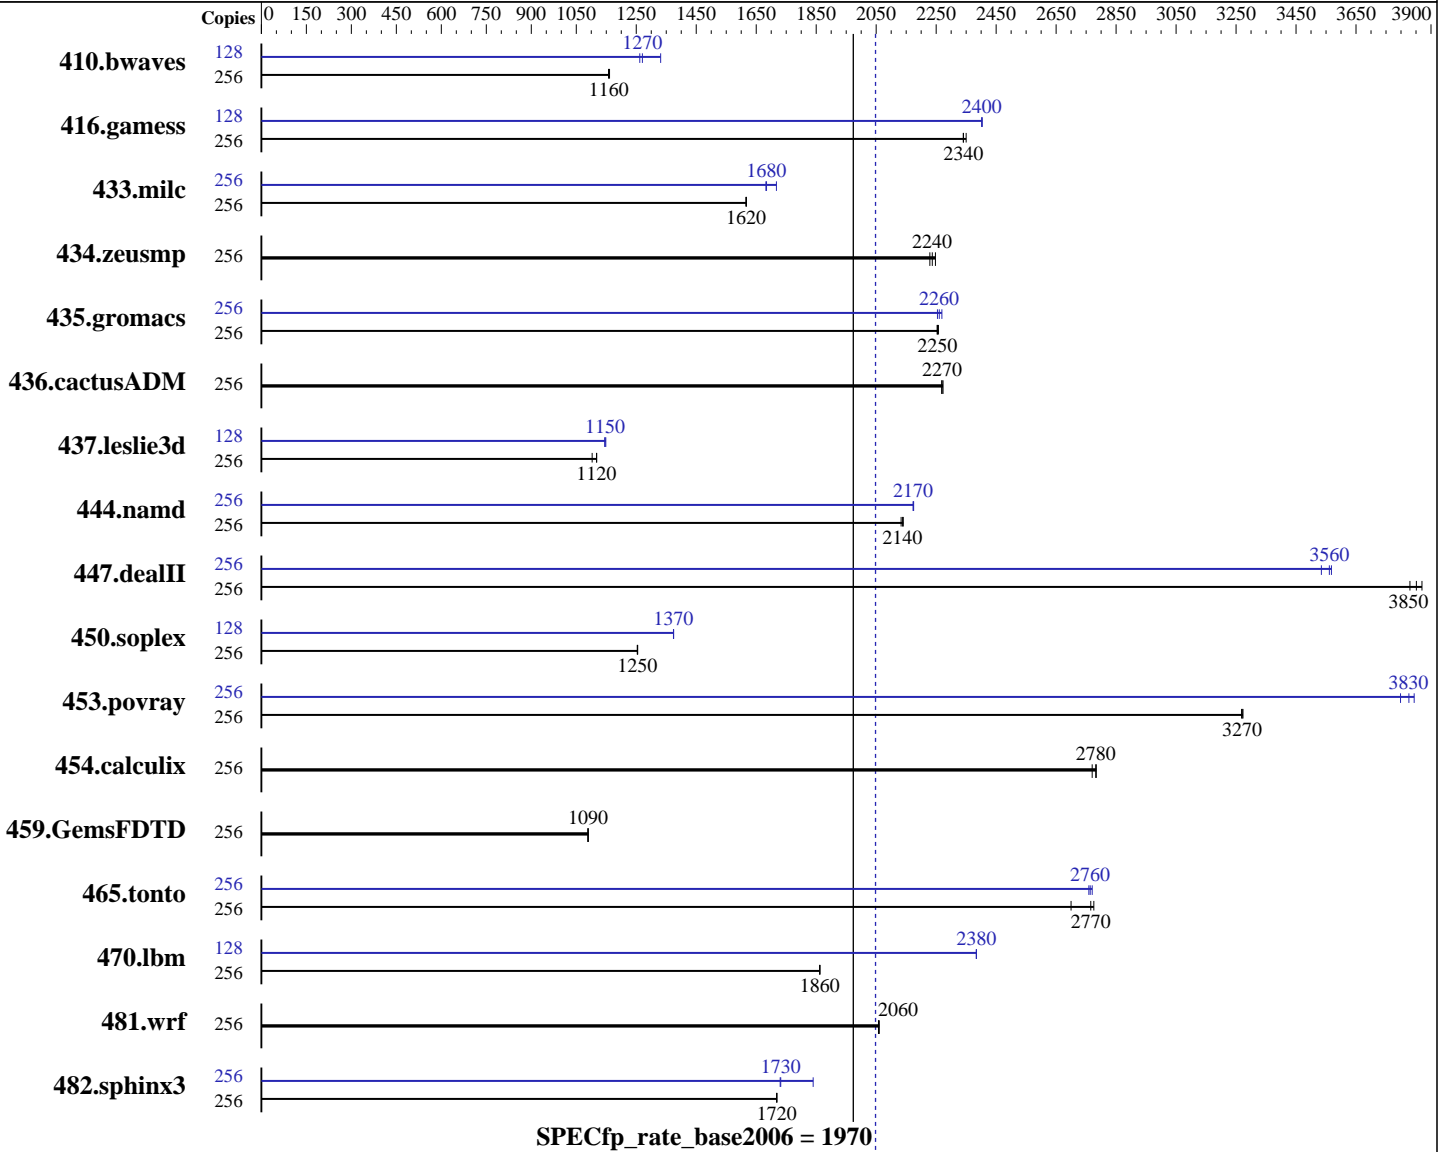

Hardware

CPU Name: Intel Xeon X7560
 CPU Characteristics: Intel Turbo Boost Technology up to 2.67 GHz
 CPU MHz: 2267
 FPU: Integrated
 CPU(s) enabled: 128 cores, 16 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 2, 4, 8, 12, 16 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux 6.0 (x86_64), Kernel 2.6.32-71.el6.x86_64
 Compiler: Intel C++ Compiler XE for applications running on IA-32 Version 12.0.1.116 Build 20101116
 Auto Parallel: No
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS
novascale bullion

SPECfp_rate2006 = **2050**

SPECfp_rate_base2006 = 1970

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Jun-2011
Hardware Availability: Sep-2011
Software Availability: Apr-2011

L3 Cache: 24 MB I+D on chip per chip
Other Cache: None
Memory: 1 TB (128 x 8 GB 4Rx8 PC3-8500R-7, ECC)
Disk Subsystem: 1 x 500 GB 7200 RPM SATA
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Microquill SmartHeap V9.01

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---------------|--------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 410.bwaves | 256 | 2997 | 1160 | 3006 | 1160 | <u>3002</u> | <u>1160</u> | 128 | <u>1369</u> | <u>1270</u> | 1307 | 1330 | 1379 | 1260 |
| 416.gamess | 256 | 2133 | 2350 | 2142 | 2340 | <u>2141</u> | <u>2340</u> | 128 | 1043 | 2400 | 1043 | 2400 | <u>1043</u> | <u>2400</u> |
| 433.milc | 256 | 1454 | 1620 | 1453 | 1620 | <u>1454</u> | <u>1620</u> | 256 | <u>1395</u> | <u>1680</u> | 1368 | 1720 | 1397 | 1680 |
| 434.zeusmp | 256 | 1045 | 2230 | <u>1041</u> | <u>2240</u> | 1037 | 2250 | 256 | 1045 | 2230 | <u>1041</u> | <u>2240</u> | 1037 | 2250 |
| 435.gromacs | 256 | 811 | 2250 | 810 | 2260 | <u>811</u> | <u>2250</u> | 256 | 811 | 2250 | <u>809</u> | <u>2260</u> | 806 | 2270 |
| 436.cactusADM | 256 | <u>1348</u> | <u>2270</u> | 1349 | 2270 | 1346 | 2270 | 256 | <u>1348</u> | <u>2270</u> | 1349 | 2270 | 1346 | 2270 |
| 437.leslie3d | 256 | <u>2153</u> | <u>1120</u> | 2182 | 1100 | 2152 | 1120 | 128 | 1051 | 1140 | 1048 | 1150 | <u>1050</u> | <u>1150</u> |
| 444.namd | 256 | 962 | 2130 | <u>960</u> | <u>2140</u> | 959 | 2140 | 256 | 945 | 2170 | <u>944</u> | <u>2170</u> | 944 | 2170 |
| 447.dealII | 256 | 765 | 3830 | <u>760</u> | <u>3850</u> | 757 | 3870 | 256 | <u>822</u> | <u>3560</u> | 821 | 3570 | 829 | 3530 |
| 450.soplex | 256 | <u>1702</u> | <u>1250</u> | 1704 | 1250 | 1702 | 1250 | 128 | <u>777</u> | <u>1370</u> | 777 | 1370 | 777 | 1370 |
| 453.povray | 256 | 417 | 3270 | 416 | 3270 | <u>416</u> | <u>3270</u> | 256 | 354 | 3840 | 359 | 3800 | <u>356</u> | <u>3830</u> |
| 454.calculix | 256 | <u>759</u> | <u>2780</u> | 759 | 2780 | 762 | 2770 | 256 | <u>759</u> | <u>2780</u> | 759 | 2780 | 762 | 2770 |
| 459.GemsFDTD | 256 | 2492 | 1090 | <u>2494</u> | <u>1090</u> | 2495 | 1090 | 256 | 2492 | 1090 | <u>2494</u> | <u>1090</u> | 2495 | 1090 |
| 465.tonto | 256 | <u>911</u> | <u>2770</u> | 908 | 2780 | 933 | 2700 | 256 | 913 | 2760 | 909 | 2770 | <u>911</u> | <u>2760</u> |
| 470.lbm | 256 | 1889 | 1860 | <u>1889</u> | <u>1860</u> | 1889 | 1860 | 128 | 738 | 2380 | 738 | 2380 | <u>738</u> | <u>2380</u> |
| 481.wrf | 256 | 1388 | 2060 | 1390 | 2060 | <u>1389</u> | <u>2060</u> | 256 | 1388 | 2060 | 1390 | 2060 | <u>1389</u> | <u>2060</u> |
| 482.sphinx3 | 256 | <u>2903</u> | <u>1720</u> | 2903 | 1720 | 2904 | 1720 | 256 | 2712 | 1840 | 2884 | 1730 | <u>2881</u> | <u>1730</u> |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores
Tmpfs filesystem set up with:
mkdir -p /mnt/shm
mount -t tmpfs -o rw,mpol=interleave tmpfs /mnt/shm/
The mpol=interleave option sets the NUMA
memory allocation policy for all files to allocate
from each node in turn.
Operating system file is ext3
Spec benchmark is copied from hard disk ext3 to tmpfs
Binaries were compiled with huge pages enabled
but huge pages were not used



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS
novascale bullion

SPECfp_rate2006 = 2050

SPECfp_rate_base2006 = 1970

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Jun-2011
Hardware Availability: Sep-2011
Software Availability: Apr-2011

Platform Notes

System is composed of 4 modules with 32 DIMMs on each module.

General Notes

The Bull novascale bullion and the Bull bullx S6030 models are electronically equivalent. The results have been measured on a novascale bullion model. Binaries were compiled on RHEL5.5

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS
novascale bullion

SPECfp_rate2006 = 2050

SPECfp_rate_base2006 = 1970

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Jun-2011
Hardware Availability: Sep-2011
Software Availability: Apr-2011

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

Fortran benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):
icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS
novascale bullion

SPECfp_rate2006 = 2050

SPECfp_rate_base2006 = 1970

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Jun-2011
Hardware Availability: Sep-2011
Software Availability: Apr-2011

Peak Portability Flags (Continued)

470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
-ansi-alias -opt-prefetch -static -auto-ilp32
482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32
447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT
453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static
416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static
434.zeusmp: basepeak = yes
437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS
novascale bullion

SPECfp_rate2006 = 2050

SPECfp_rate_base2006 = 1970

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Jun-2011
Hardware Availability: Sep-2011
Software Availability: Apr-2011

Peak Optimization Flags (Continued)

459.GemsFDTD: basepeak = yes

```
465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT
```

Benchmarks using both Fortran and C:

```
435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-static -auto-ilp32
```

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.20110705.html>
<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110705.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.20110705.xml>
<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110705.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 21:53:33 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 5 July 2011.