



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

Acer AW2000ht-AW170ht F1 (Intel Xeon E5630, 2.53 GHz)

SPECfp®_rate2006 = 183

SPECfp_rate_base2006 = 178

CPU2006 license: 97


Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Jul-2011

Hardware Availability: Aug-2010

Software Availability: Jan-2011

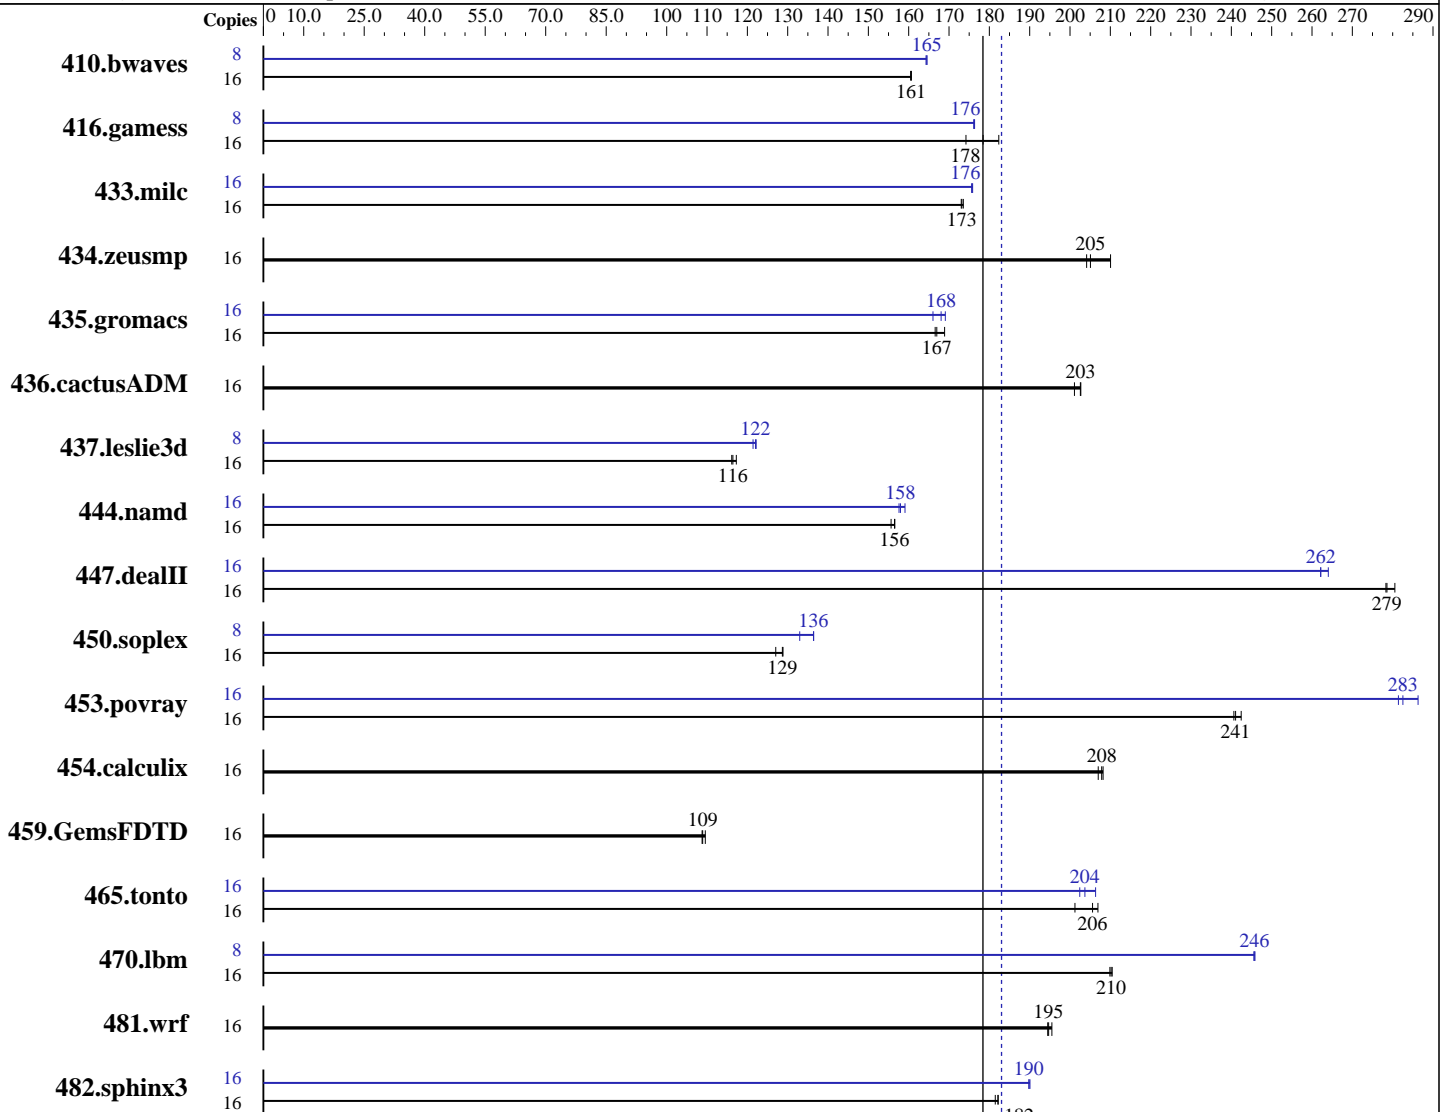

SPECfp_rate_base2006 = 178

SPECfp_rate2006 = 183

Hardware

CPU Name: Intel Xeon E5630
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz
 CPU MHz: 2533
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1, 2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64) SP1, Kernel 2.6.32.12-0.7-default
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.1.116 Build 20101116
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 183

Acer AW2000ht-AW170ht F1 (Intel Xeon E5630, 2.53 GHz)

SPECfp_rate_base2006 = 178

CPU2006 license: 97
Test sponsor: Acer Incorporated
Tested by: Acer Incorporated

Test date: Jul-2011
Hardware Availability: Aug-2010
Software Availability: Jan-2011

L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (12 x 4 GB 2Rx8 PC3-10600R-9, ECC)
Disk Subsystem: 1 x 1000 GB SATA 7200RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	1354	161	1353	161	1355	160	8	661	165	661	165	662	164
416.gamess	16	1718	182	1798	174	1756	178	8	888	176	889	176	889	176
433.milc	16	846	174	849	173	848	173	16	836	176	835	176	836	176
434.zeusmp	16	693	210	713	204	710	205	16	693	210	713	204	710	205
435.gromacs	16	676	169	684	167	686	167	16	676	169	688	166	680	168
436.cactusADM	16	943	203	951	201	944	203	16	943	203	951	201	944	203
437.leslie3d	16	1295	116	1292	116	1283	117	8	619	121	616	122	615	122
444.namd	16	820	157	824	156	820	156	16	807	159	814	158	812	158
447.dealII	16	652	281	657	279	658	278	16	698	262	693	264	698	262
450.soplex	16	1050	127	1036	129	1037	129	8	502	133	489	136	489	136
453.povray	16	354	241	353	241	351	242	16	302	281	301	283	297	286
454.calculix	16	635	208	638	207	634	208	16	635	208	638	207	634	208
459.GemsFDTD	16	1558	109	1561	109	1549	110	16	1558	109	1561	109	1549	110
465.tonto	16	782	201	761	207	766	206	16	778	202	763	206	773	204
470.lbm	16	1045	210	1046	210	1047	210	8	447	246	448	246	447	246
481.wrf	16	918	195	914	196	919	194	16	918	195	914	196	919	194
482.sphinx3	16	1718	181	1712	182	1712	182	16	1641	190	1643	190	1643	190

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
Large pages were disabled for this run

Platform Notes

BIOS Settings:
Fan speed = full speed (Default = Balanced)
Data Reuse = Disabled (Default = Enabled)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

Acer AW2000ht-AW170ht F1 (Intel Xeon E5630, 2.53 GHz)

SPECfp_rate2006 = 183

SPECfp_rate_base2006 = 178

CPU2006 license: 97
Test sponsor: Acer Incorporated
Tested by: Acer Incorporated

Test date: Jul-2011
Hardware Availability: Aug-2010
Software Availability: Jan-2011

General Notes

Binaries compiled on RHEL5.5

The Acer AW2000h-AW170h F1, Gateway GW2000h-GW170h F1, Acer AW2000ht-AW170ht F1 and Gateway GW2000ht-GW170ht F1 are electronically equivalent. This result was measured on Gateway GW2000ht-GW170ht F1.

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

Acer AW2000ht-AW170ht F1 (Intel Xeon E5630, 2.53 GHz)

SPECfp_rate2006 = 183

SPECfp_rate_base2006 = 178

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Jul-2011

Hardware Availability: Aug-2010

Software Availability: Jan-2011

Base Optimization Flags (Continued)

Fortran benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static`

Benchmarks using both Fortran and C:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias`

Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m64`

`482.sphinx3:icc -m32`

C++ benchmarks (except as noted below):

`icpc -m64`

`450.soplex:icpc -m32`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
 416.gamess: `-DSPEC_CPU_LP64`
 433.milc: `-DSPEC_CPU_LP64`
 434.zeusmp: `-DSPEC_CPU_LP64`
 435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
 436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
 437.leslie3d: `-DSPEC_CPU_LP64`
 444.namd: `-DSPEC_CPU_LP64`
 447.dealII: `-DSPEC_CPU_LP64`
 453.povray: `-DSPEC_CPU_LP64`
 454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
 459.GemsFDTD: `-DSPEC_CPU_LP64`
 465.tonto: `-DSPEC_CPU_LP64`
 470.lbm: `-DSPEC_CPU_LP64`
 481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

Acer AW2000ht-AW170ht F1 (Intel Xeon E5630, 2.53 GHz)

SPECfp_rate2006 = 183

SPECfp_rate_base2006 = 178

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Jul-2011

Hardware Availability: Aug-2010

Software Availability: Jan-2011

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
-ansi-alias -opt-prefetch -static -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated
Acer AW2000ht-AW170ht F1 (Intel Xeon E5630,
2.53 GHz)

SPECfp_rate2006 = 183

SPECfp_rate_base2006 = 178

CPU2006 license: 97
Test sponsor: Acer Incorporated
Tested by: Acer Incorporated

Test date: Jul-2011
Hardware Availability: Aug-2010
Software Availability: Jan-2011

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-static -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>
<http://www.spec.org/cpu2006/flags/Acer-Intel-Linux-Settings-flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>
<http://www.spec.org/cpu2006/flags/Acer-Intel-Linux-Settings-flags.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 22:16:58 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 August 2011.