



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint®_rate2006 = 516

Express5800/A1080a-S (Intel Xeon E7-4807)

SPECint_rate_base2006 = 484

CPU2006 license: 9006


Test date: Aug-2011

Test sponsor: NEC Corporation

Hardware Availability: Nov-2011

Tested by: NEC Corporation

Software Availability: May-2011

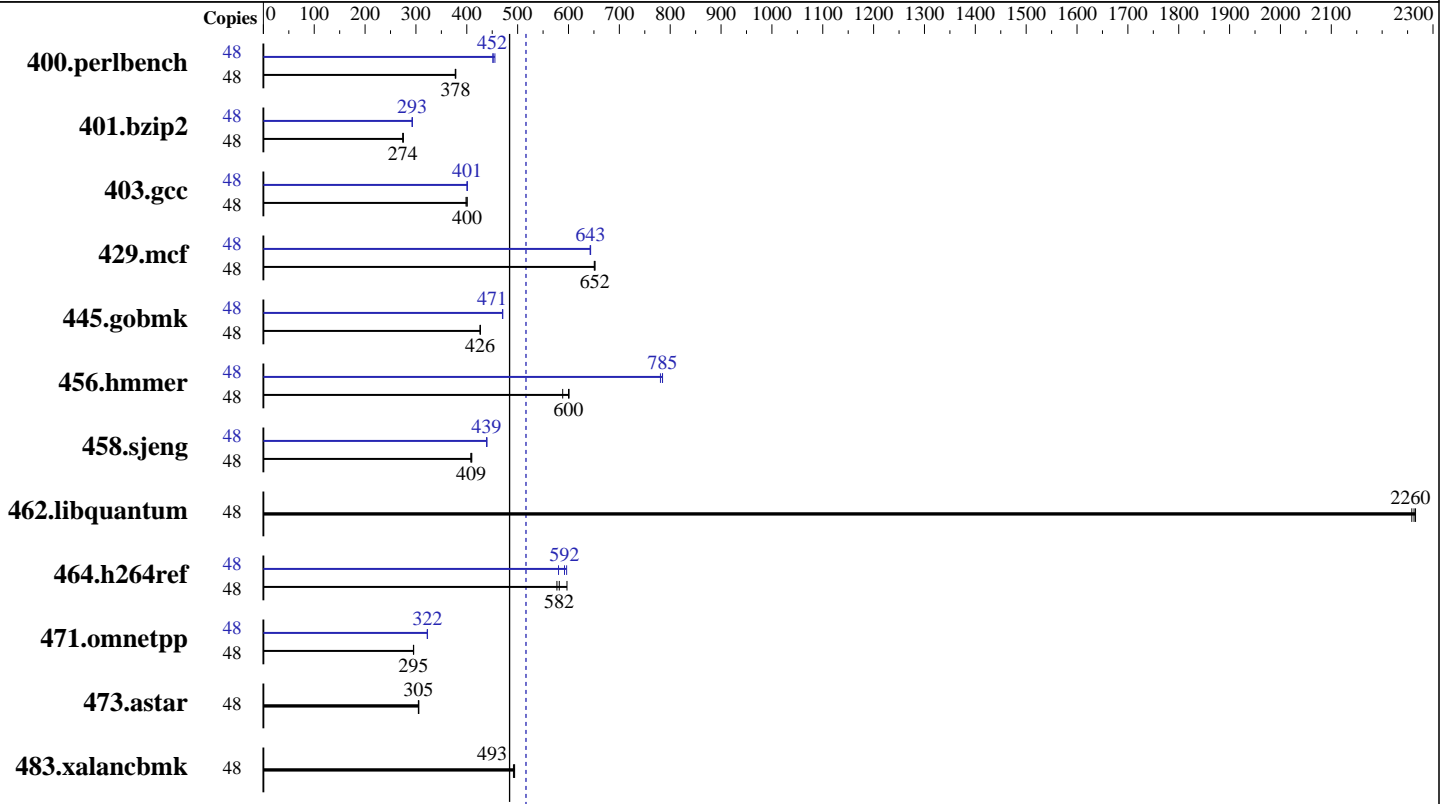

SPECint_rate2006 = 516

SPECint_rate_base2006 = 484

Hardware

CPU Name: Intel Xeon E7-4807
 CPU Characteristics:
 CPU MHz: 1867
 FPU: Integrated
 CPU(s) enabled: 24 cores, 4 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2,3,4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 18 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (64 x 4 GB 2Rx4 PC3-8500R-7, ECC)
 Disk Subsystem: 2x300 GB SAS, 10000 RPM, RAID 0
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.1, Kernel 2.6.32-131.0.15.el6.x86_64 on an x86_64
 Compiler: C/C++: Version 12.0.4.191 of Intel Compiler XE for applications on IA-32 Build 20110427
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 516

Express5800/A1080a-S (Intel Xeon E7-4807)

SPECint_rate_base2006 = 484

CPU2006 license: 9006

Test date: Aug-2011

Test sponsor: NEC Corporation

Hardware Availability: Nov-2011

Tested by: NEC Corporation

Software Availability: May-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	48	1240	378	1240	378	1243	377	48	1030	455	1038	452	1039	451
401.bzip2	48	1688	274	1689	274	1683	275	48	1582	293	1581	293	1583	293
403.gcc	48	965	400	965	401	970	398	48	963	401	964	401	965	401
429.mcf	48	671	652	673	651	672	652	48	681	643	680	644	681	643
445.gobmk	48	1181	426	1181	426	1180	427	48	1070	471	1071	470	1070	471
456.hammer	48	745	601	761	589	746	600	48	571	785	571	785	574	781
458.sjeng	48	1417	410	1424	408	1420	409	48	1323	439	1321	440	1323	439
462.libquantum	48	439	2270	440	2260	440	2260	48	439	2270	440	2260	440	2260
464.h264ref	48	1826	582	1840	577	1779	597	48	1830	580	1794	592	1781	596
471.omnetpp	48	1016	295	1017	295	1015	295	48	929	323	930	322	931	322
473.astar	48	1106	305	1103	306	1104	305	48	1106	305	1103	306	1104	305
483.xalancbmk	48	674	492	670	494	672	493	48	674	492	670	494	672	493

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
echo 1 > /proc/sys/vm/zone_reclaim_mode
Huge pages were not configured for this run

Platform Notes

Patrol Scrubbing set to disabled in Maintenance Console

General Notes

The Express5800/A1080a-S and the Express5800/A1080a-D models are electronically equivalent.
The results have been measured on the Express5800/A1080a-S model.
Binaries were compiled on RHEL 5.6

Base Compiler Invocation

C benchmarks:
icc -m32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 516

Express5800/A1080a-S (Intel Xeon E7-4807)

SPECint_rate_base2006 = 484

CPU2006 license: 9006

Test date: Aug-2011

Test sponsor: NEC Corporation

Hardware Availability: Nov-2011

Tested by: NEC Corporation

Software Availability: May-2011

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/opt/SmartHeap_9/lib -lsmartheap
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 516

Express5800/A1080a-S (Intel Xeon E7-4807)

SPECint_rate_base2006 = 484

CPU2006 license: 9006

Test date: Aug-2011

Test sponsor: NEC Corporation

Hardware Availability: Nov-2011

Tested by: NEC Corporation

Software Availability: May-2011

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
 401.bzip2: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LINUX
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div
 -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
 -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -unroll4 -auto-ilp32
 -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
 -L/opt/SmartHeap_9/lib -lsmartheap

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 516

Express5800/A1080a-S (Intel Xeon E7-4807)

SPECint_rate_base2006 = 484

CPU2006 license: 9006

Test date: Aug-2011

Test sponsor: NEC Corporation

Hardware Availability: Nov-2011

Tested by: NEC Corporation

Software Availability: May-2011

Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.20110705.html>

<http://www.spec.org/cpu2006/flags/NEC-platform-linux64-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.20110705.xml>

<http://www.spec.org/cpu2006/flags/NEC-platform-linux64-revB.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Thu Jul 24 01:50:30 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 25 October 2011.