



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp[®]_rate2006 = 3080

IBM Power 780 (3.44 GHz, 96 core, SLES)

SPECfp_rate_base2006 = 2850

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Aug-2011

Hardware Availability: Oct-2011

Software Availability: Jul-2011

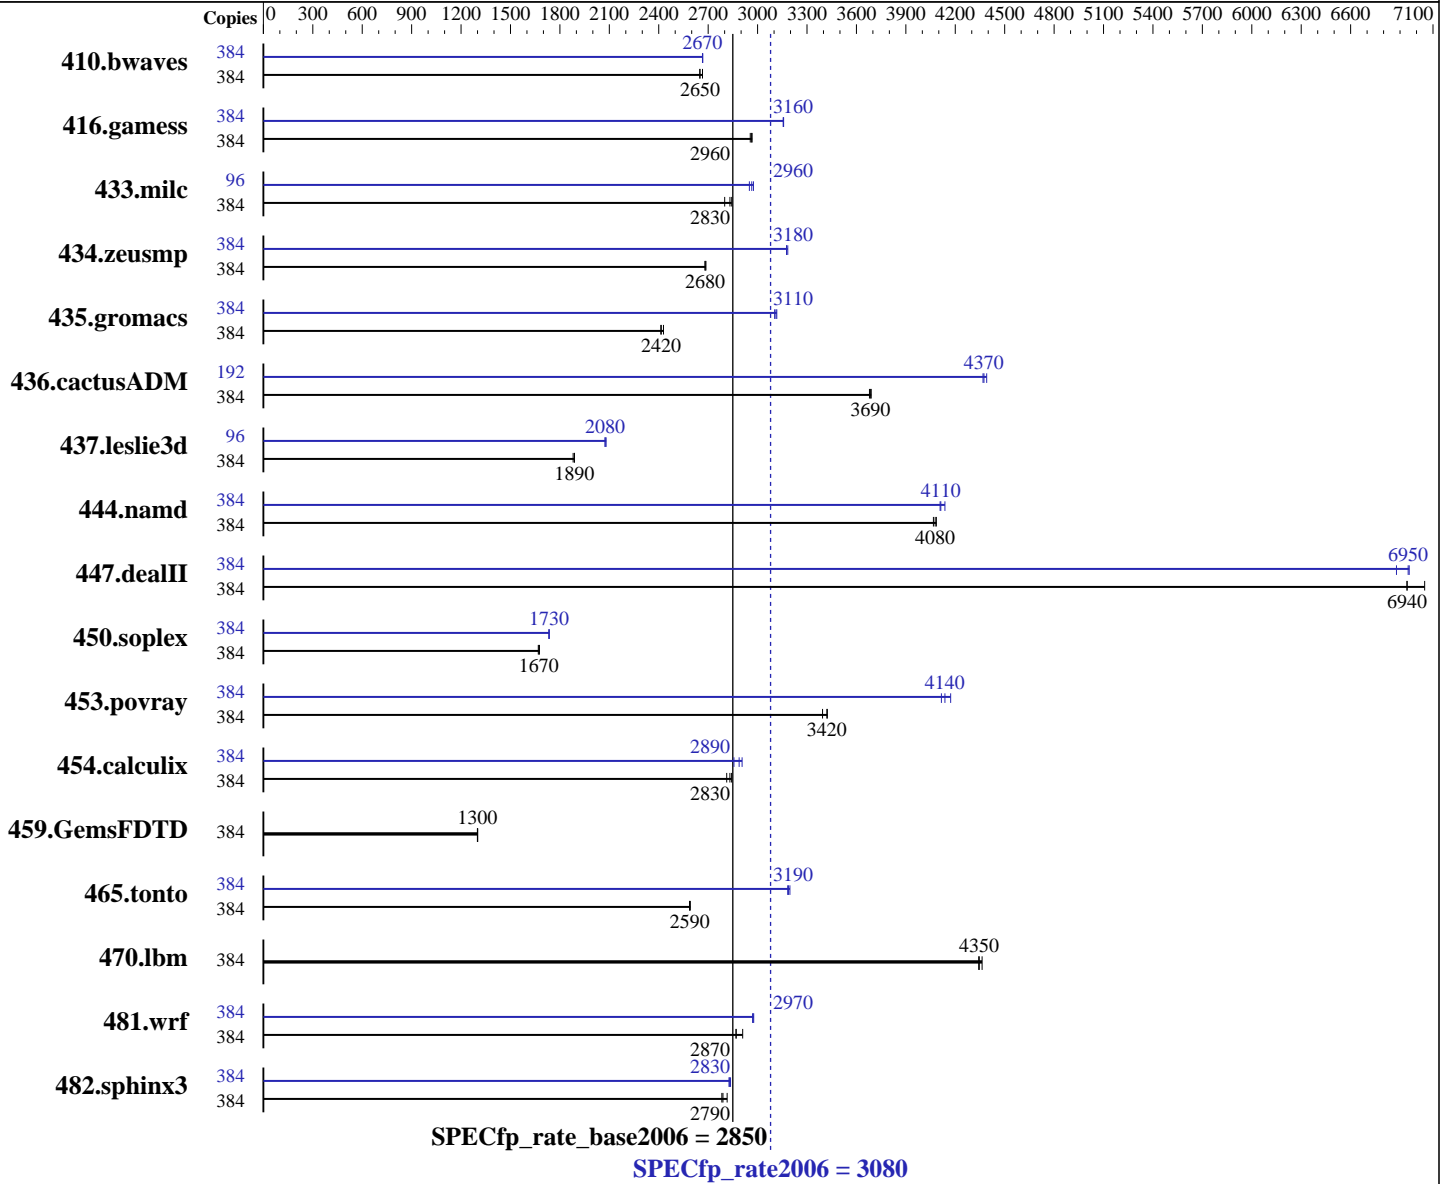

Hardware

CPU Name: POWER7
 CPU Characteristics: Intelligent Energy Optimization enabled, up to 3.780 GHz
 CPU MHz: 3444
 FPU: Integrated
 CPU(s) enabled: 96 cores, 16 chips, 6 cores/chip, 4 threads/core
 CPU(s) orderable: 24,48,72,96 cores
 Primary Cache: 32 KB I + 32 KB D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (ppc64), Kernel 2.6.32.12-0.7-ppc64
 Compiler: C/C++: Version 11.1 of IBM XL C/C++ for Linux;
 Fortran: Version 13.1 of IBM XL Fortran for Linux
 Auto Parallel: No
 File System: ext2

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 3080

IBM Power 780 (3.44 GHz, 96 core, SLES)

SPECfp_rate_base2006 = 2850

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Aug-2011
Hardware Availability: Oct-2011
Software Availability: Jul-2011

Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 4 MB I+D on chip per core
Other Cache: None
Memory: 1 TB (64 x 16 GB) DDR3 1066 MHz
Disk Subsystem: 10 x 146.8 GB Raid0 SAS SFF 15K RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32-bit
Peak Pointers: 32/64-bit
Other Software: -IBM Post-Link Optimization for Linux on POWER, version 5.6.0-4
-MicroQuill SmartHeap 9
-Apache C++ Standard Library V4.2.1

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	384	1958	2670	1969	2650	1970	2650	384	1958	2670	1958	2670	1956	2670
416.gamess	384	2534	2970	2538	2960	2544	2960	384	2381	3160	2383	3160	2382	3160
433.milc	384	1259	2800	1240	2840	1245	2830	96	299	2950	296	2970	297	2960
434.zeusmp	384	1303	2680	1301	2690	1304	2680	384	1100	3180	1098	3180	1100	3180
435.gromacs	384	1135	2420	1137	2410	1129	2430	384	881	3110	880	3120	884	3100
436.cactusADM	384	1245	3690	1247	3680	1244	3690	192	525	4370	523	4390	525	4370
437.leslie3d	384	1912	1890	1911	1890	1920	1880	96	435	2070	435	2080	434	2080
444.namd	384	757	4070	755	4080	754	4090	384	749	4110	750	4110	744	4140
447.dealII	384	623	7050	633	6940	633	6940	384	632	6950	639	6880	632	6960
450.soplex	384	1914	1670	1911	1680	1919	1670	384	1847	1730	1846	1740	1847	1730
453.povray	384	597	3420	602	3390	597	3420	384	494	4140	490	4170	496	4120
454.calculix	384	1115	2840	1126	2810	1119	2830	384	1109	2860	1097	2890	1090	2910
459.GemsFDTD	384	3131	1300	3134	1300	3136	1300	384	3131	1300	3134	1300	3136	1300
465.tonto	384	1461	2590	1460	2590	1458	2590	384	1185	3190	1187	3180	1182	3200
470.lbm	384	1209	4360	1215	4340	1214	4350	384	1209	4360	1215	4340	1214	4350
481.wrf	384	1474	2910	1494	2870	1495	2870	384	1441	2980	1444	2970	1443	2970
482.sphinx3	384	2658	2820	2689	2780	2683	2790	384	2647	2830	2646	2830	2639	2840

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

C/C++ compiler updated to July2011 PTF
Version 11.01.0000.0003
Fortran compiler updated to July2011 PTF
Version 13.01.0000.0003

Peak Tuning Notes

IBM Post-Link optimization tool used for:
433.milc 435.gromacs 436.cactusADM 450.soplex 482.sphinx3
with options -O4 -nodp
444.namd
with options -O3 -lu -l -nodp -sdp 9

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 3080

IBM Power 780 (3.44 GHz, 96 core, SLES)

SPECfp_rate_base2006 = 2850

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Aug-2011

Hardware Availability: Oct-2011

Software Availability: Jul-2011

Peak Tuning Notes (Continued)

```
465.tonto
    with options -O4
470.lbm
    with options -kr -O4 -sdp 9 -vrox -m power7
```

Submit Notes

The config file option 'submit' was used to assign benchmark copy to specific kernel thread using the "numactl" command (see flags file for details).

Operating System Notes

```
ulimit -s (stack) set to 2097152
Large pages reserved as follows by root user:
echo 25728 > /proc/sys/vm/nr_hugepages
The following environment variables were set before the runspec command:
export XLFRTEOPTS=intrinthds=1
export HUGETLB_VERBOSE=0
export HUGETLB_MORECORE=yes
export HUGETLB_ELFMAP=RW
```

General Notes

```
447.dealII (peak): "apache_stdcxx_4_2_1" src.alt was used.
447.dealII (base): "apache_stdcxx_4_2_1" src.alt was used.
```

The Apache C++ Standard Library V4.2.1 was installed from <http://stdcxx.apache.org/download.html> using:
gmake BUILDTYPE=8d CONFIG=gcc.config
IBM Post-Link optimization tool can be downloaded from <http://www-304.ibm.com/webapp/set2/sas/f/lopdiags/sdkdownload.html>

Base Compiler Invocation

```
C benchmarks:
    xlc -qlanglvl=extc99

C++ benchmarks:
    xlc

Fortran benchmarks:
    xlf95

Benchmarks using both Fortran and C:
    xlc -qlanglvl=extc99 xlf95
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 3080

IBM Power 780 (3.44 GHz, 96 core, SLES)

SPECfp_rate_base2006 = 2850

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Aug-2011

Hardware Availability: Oct-2011

Software Availability: Jul-2011

Base Portability Flags

```

410.bwaves: -qfixed
416.gamess: -qfixed
434.zeusmp: -qfixed
435.gromacs: -qfixed -qextname
436.cactusADM: -qfixed -qextname
437.leslie3d: -qfixed
454.calculix: -qfixed -qextname
481.wrf: -DNOUNDERSCORE
482.sphinx3: -qchars=signed

```

Base Optimization Flags

C benchmarks:

-O5 -lhugetlbfs

C++ benchmarks:

-O4 -qrtti

-qcpp_stdinc=/root/stdcxx421/include/ansi:/root/stdcxx421/include:/opt/ibmcomp/vacpp/11.1/include

-lhugetlbfs -L/root/stdcxx421/lib -R/root/stdcxx421/lib -lstd8d

Fortran benchmarks:

-O5 -qalias=nostd -lhugetlbfs

Benchmarks using both Fortran and C:

-O5 -qalias=nostd -lhugetlbfs

Base Other Flags

C benchmarks:

-qipa=noobject -qipa=threads

C++ benchmarks:

-qipa=noobject -qipa=threads

Fortran benchmarks:

-qipa=noobject -qipa=threads

Benchmarks using both Fortran and C:

-qipa=noobject -qipa=threads

Peak Compiler Invocation

C benchmarks:

xlc -qlanglvl=extc99

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 3080

IBM Power 780 (3.44 GHz, 96 core, SLES)

SPECfp_rate_base2006 = 2850

CPU2006 license: 11

Test date: Aug-2011

Test sponsor: IBM Corporation

Hardware Availability: Oct-2011

Tested by: IBM Corporation

Software Availability: Jul-2011

Peak Compiler Invocation (Continued)

C++ benchmarks:
x1c

Fortran benchmarks:
x1f95

Benchmarks using both Fortran and C:
x1c -qlanglvl=extc99 x1f95

Peak Portability Flags

410.bwaves: -qfixed
416.gamess: -qfixed
434.zeusmp: -qfixed
435.gromacs: -qfixed -qextname
436.cactusADM: -qfixed -qextname -DSPEC_CPU_LP64
437.leslie3d: -qfixed
453.povray: -DSPEC_CPU_LP64
454.calculix: -qfixed -qextname
481.wrf: -DNOUNDERSCORE
482.sphinx3: -qchars=signed

Peak Optimization Flags

C benchmarks:

433.milc: -Wl,-q -O5 -lhugetlbfs

470.lbm: basepeak = yes

482.sphinx3: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -lhugetlbfs

C++ benchmarks:

444.namd: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -lhugetlbfs

447.dealIII: -O4 -qrtti

-qcpp_stdinc=/root/stdcxx421/include/ansi:/root/stdcxx421/include:/opt/ibmcomp/vacpp/11.1/i
-lsmartheap -lhugetlbfs -L/root/stdcxx421/lib
-R/root/stdcxx421/lib -lstd8d

450.soplex: -Wl,-q -O3 -qarch=auto -qtune=auto -lhugetlbfs

453.povray: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qsimd -q64
-lsmartheap64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 3080

IBM Power 780 (3.44 GHz, 96 core, SLES)

SPECfp_rate_base2006 = 2850

CPU2006 license: 11

Test date: Aug-2011

Test sponsor: IBM Corporation

Hardware Availability: Oct-2011

Tested by: IBM Corporation

Software Availability: Jul-2011

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -q64 -lhugetlbfs

416.gamess: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qalias=nostd
-lhugetlbfs

434.zeusmp: -O5 -qsmallstack=dynlenonheap -qalias=nostd
-B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-align

437.leslie3d: -O5 -lhugetlbfs

459.GemsFDTD: basepeak = yes

465.tonto: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qsimd
-lhugetlbfs

Benchmarks using both Fortran and C:

435.gromacs: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qsimd
-lhugetlbfs

436.cactusADM: -Wl,-q -O4 -q64 -qsimd -qnostrict
-qsmallstack=dynlenonheap -qalias=nostd -lhugetlbfs

454.calculix: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -lhugetlbfs

481.wrf: -O3 -qarch=auto -qtune=auto -q64 -lhugetlbfs

Peak Other Flags

C benchmarks:

-qipa=noobject -qipa=threads

C++ benchmarks:

-qipa=noobject -qipa=threads

Fortran benchmarks:

-qipa=noobject -qipa=threads

Benchmarks using both Fortran and C:

-qipa=noobject -qipa=threads

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-Linux-XL.20101123.html>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 3080

IBM Power 780 (3.44 GHz, 96 core, SLES)

SPECfp_rate_base2006 = 2850

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Aug-2011

Hardware Availability: Oct-2011

Software Availability: Jul-2011

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/IBM-Linux-XL.20101123.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Thu Jul 24 00:53:39 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 7 November 2011.