



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Itautec**

**SPECfp®\_rate2006 = 182**

Servidor Itautec MX203+ (Intel Xeon E5630)

**SPECfp\_rate\_base2006 = 178**

CPU2006 license: 9001


**Test date:** Nov-2011

**Test sponsor:** Itautec

**Hardware Availability:** Jul-2011

**Tested by:** Itautec

**Software Availability:** Aug-2011

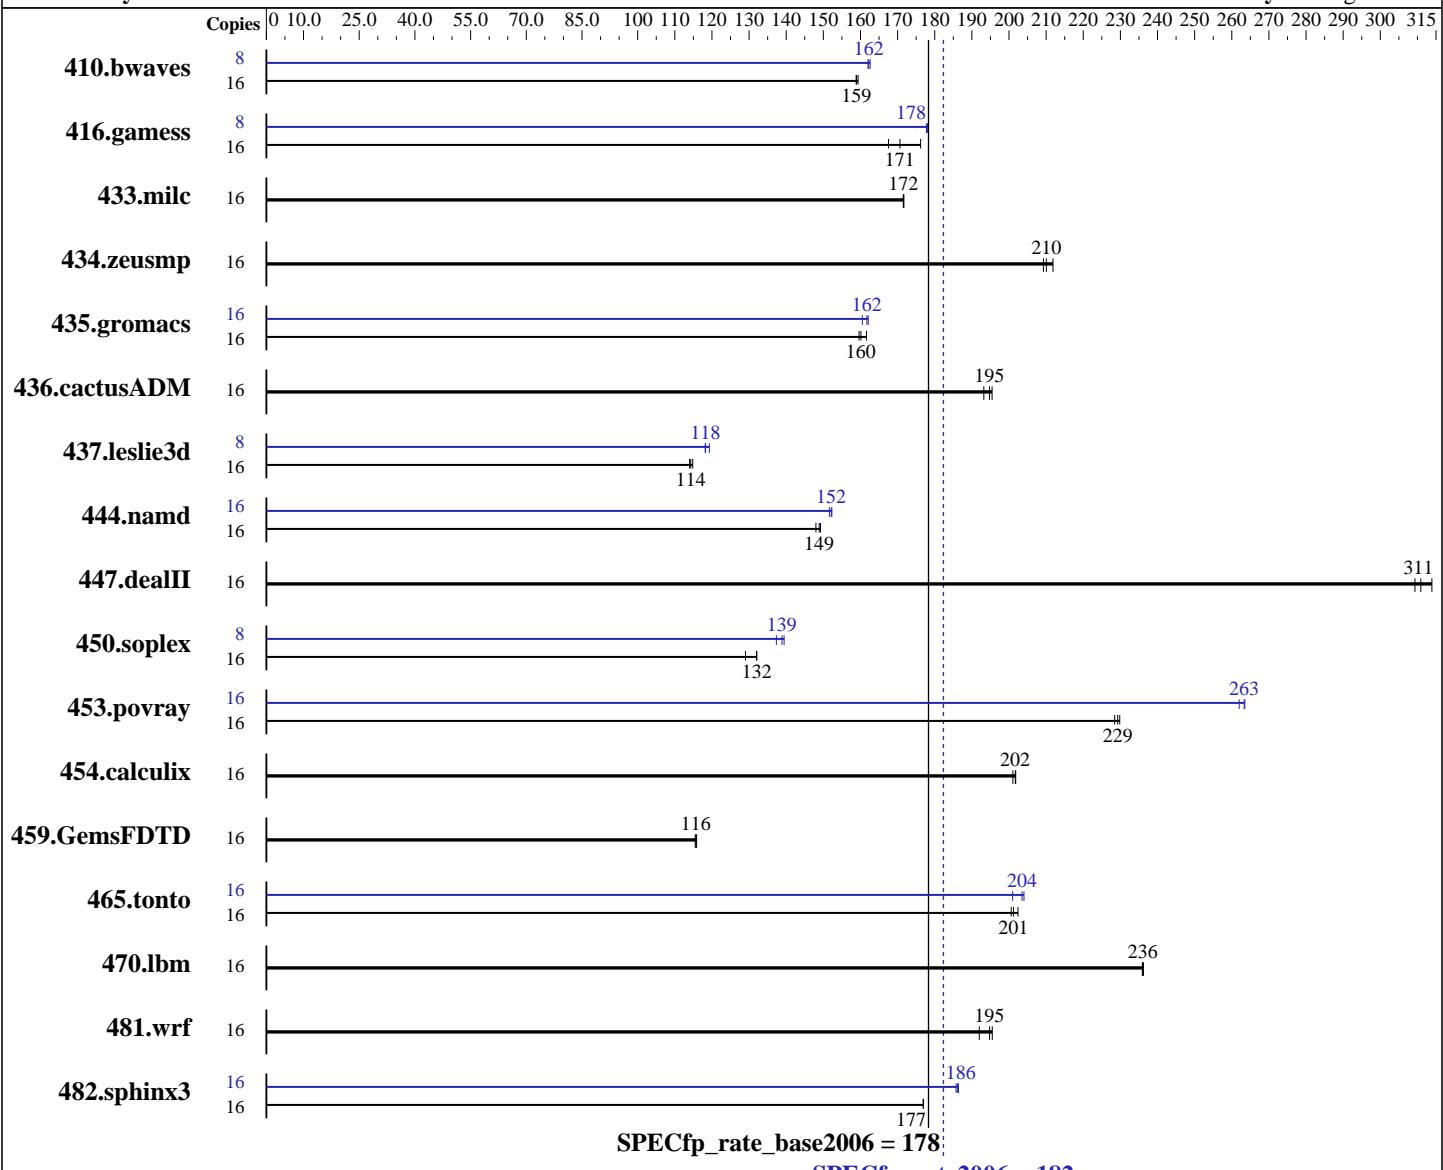

## Hardware

CPU Name: Intel Xeon E5630  
CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz  
CPU MHz: 2533  
FPU: Integrated  
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

## Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86\_64), Kernel 2.6.32.12-0.7-default  
Compiler: C/C++/Fortran: Version 12.1.0 of Intel Compiler XE Build 20110811  
Auto Parallel: No  
File System: ext3  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Itautec**

**SPECfp\_rate2006 = 182**

Servidor Itautec MX203+ (Intel Xeon E5630)

**SPECfp\_rate\_base2006 = 178**

**CPU2006 license:** 9001

**Test date:** Nov-2011

**Test sponsor:** Itautec

**Hardware Availability:** Jul-2011

**Tested by:** Itautec

**Software Availability:** Aug-2011

L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC)  
 Disk Subsystem: 1 x 500 GB SAS, 15000 RPM  
 Other Hardware: None

Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	1365	159	<u>1368</u>	<u>159</u>	1369	159	8	<b>670</b>	<b>162</b>	669	163	671	162
416.gamess	16	<b>1836</b>	<b>171</b>	1870	168	1778	176	8	881	178	880	178	<b>880</b>	<b>178</b>
433.milc	16	855	172	856	172	<b>856</b>	<b>172</b>	16	855	172	856	172	<b>856</b>	<b>172</b>
434.zeusmp	16	687	212	<b>693</b>	<b>210</b>	696	209	16	687	212	<b>693</b>	<b>210</b>	696	209
435.gromacs	16	707	162	716	160	<b>713</b>	<b>160</b>	16	<b>706</b>	<b>162</b>	705	162	712	161
436.cactusADM	16	978	195	990	193	<b>982</b>	<b>195</b>	16	978	195	990	193	<b>982</b>	<b>195</b>
437.leslie3d	16	1319	114	<b>1316</b>	<b>114</b>	1310	115	8	636	118	<b>636</b>	<b>118</b>	630	119
444.namd	16	<b>862</b>	<b>149</b>	867	148	860	149	16	<b>844</b>	<b>152</b>	843	152	846	152
447.dealII	16	<b>589</b>	<b>311</b>	583	314	592	309	16	<b>589</b>	<b>311</b>	583	314	<b>592</b>	<b>309</b>
450.soplex	16	1034	129	1010	132	<b>1011</b>	<b>132</b>	8	486	137	<b>480</b>	<b>139</b>	479	139
453.povray	16	370	230	373	228	<b>371</b>	<b>229</b>	16	325	262	323	264	<b>323</b>	<b>263</b>
454.calculix	16	<b>654</b>	<b>202</b>	657	201	654	202	16	<b>654</b>	<b>202</b>	657	201	654	202
459.GemsFDTD	16	<b>1467</b>	<b>116</b>	1465	116	1470	115	16	<b>1467</b>	<b>116</b>	1465	116	1470	115
465.tonto	16	785	201	<b>783</b>	<b>201</b>	778	202	16	772	204	<b>774</b>	<b>204</b>	783	201
470.lbm	16	931	236	<b>932</b>	<b>236</b>	932	236	16	931	236	<b>932</b>	<b>236</b>	932	236
481.wrf	16	914	195	<b>918</b>	<b>195</b>	931	192	16	914	195	<b>918</b>	<b>195</b>	931	192
482.sphinx3	16	<b>1763</b>	<b>177</b>	1762	177	1763	177	16	<b>1676</b>	<b>186</b>	1679	186	1673	186

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
 numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.  
 Large pages were not enabled for this run

## Platform Notes

Data Reuse disabled in BIOS.



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaute

Servidor Itaute MX203+ (Intel Xeon E5630)

**SPECfp\_rate2006 = 182**

CPU2006 license: 9001

Test date: Nov-2011

Test sponsor: Itaute

Hardware Availability: Jul-2011

Tested by: Itaute

Software Availability: Aug-2011

## General Notes

This result was measured on the Servidor Itaute MX224.

The Servidor Itaute MX203+, Servidor Itaute MX223+ and the Servidor Itaute MX224 are electronically equivalent.

## Base Compiler Invocation

C benchmarks:

  icc -m64

C++ benchmarks:

  icpc -m64

Fortran benchmarks:

  ifort -m64

Benchmarks using both Fortran and C:

  icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
  433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
  444.namd: -DSPEC\_CPU\_LP64  
  447.dealII: -DSPEC\_CPU\_LP64  
  450.soplex: -DSPEC\_CPU\_LP64  
  453.povray: -DSPEC\_CPU\_LP64  
  454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
  465.tonto: -DSPEC\_CPU\_LP64  
  470.lbm: -DSPEC\_CPU\_LP64  
  481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

  -xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

C++ benchmarks:

  -xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec MX203+ (Intel Xeon E5630)

**SPECfp\_rate2006 = 182**

CPU2006 license: 9001

Test sponsor: Itautec

Tested by: Itautec

Test date: Nov-2011

Hardware Availability: Jul-2011

Software Availability: Aug-2011

## Base Optimization Flags (Continued)

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautech

Servidor Itautech MX203+ (Intel Xeon E5630)

**SPECfp\_rate2006 = 182**

**CPU2006 license:** 9001

**Test sponsor:** Itautech

**Tested by:** Itautech

**Test date:** Nov-2011

**Hardware Availability:** Jul-2011

**Software Availability:** Aug-2011

## Peak Optimization Flags

C benchmarks:

```
433.milc: basepeak = yes  
470.lbm: basepeak = yes  
482.sphinx3: -xsse4.2 -ipo -O3 -no-prec-div -unroll12
```

C++ benchmarks:

```
444.namd: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32  
447.dealII: basepeak = yes  
450.soplex: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3  
-B /usr/share/libhugetlbfss/ -Wl,-hugetlbfss-link=BDT  
453.povray: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -ansi-alias  
-B /usr/share/libhugetlbfss/ -Wl,-melf_x86_64 -Wl,-hugetlbfss-link=BDT
```

Fortran benchmarks:

```
410.bwaves: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static  
416.gamess: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll12  
-inline-level=0 -scalar-rep- -static  
434.zeusmp: basepeak = yes  
437.leslie3d: -xsse4.2 -ipo -O3 -no-prec-div  
-B /usr/share/libhugetlbfss/ -Wl,-melf_x86_64 -Wl,-hugetlbfss-link=BDT  
459.GemsFDTD: basepeak = yes  
465.tonto: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -auto  
-inline-alloc -opt-malloc-options=3  
-B /usr/share/libhugetlbfss/ -Wl,-melf_x86_64 -Wl,-hugetlbfss-link=BDT
```

Benchmarks using both Fortran and C:

```
435.gromacs: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-static -auto-ilp32
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec MX203+ (Intel Xeon E5630)

**SPECfp\_rate2006 = 182**

**SPECfp\_rate\_base2006 = 178**

**CPU2006 license:** 9001

**Test sponsor:** Itautec

**Tested by:** Itautec

**Test date:** Nov-2011

**Hardware Availability:** Jul-2011

**Software Availability:** Aug-2011

## Peak Optimization Flags (Continued)

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Itautec-Intel-Linux64-Platform.html>

<http://www.spec.org/cpu2006/flags/Intel-icl2.1-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Itautec-Intel-Linux64-Platform.xml>

<http://www.spec.org/cpu2006/flags/Intel-icl2.1-linux64.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Thu Jul 24 00:45:59 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 20 December 2011.