



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECint®_rate2006 = 138

HA8000-bd (Intel Xeon E3-1260L)

SPECint_rate_base2006 = 132

CPU2006 license: 35


Test sponsor: HITACHI

Tested by: HITACHI

Test date: Dec-2011

Hardware Availability: Feb-2012

Software Availability: Sep-2011

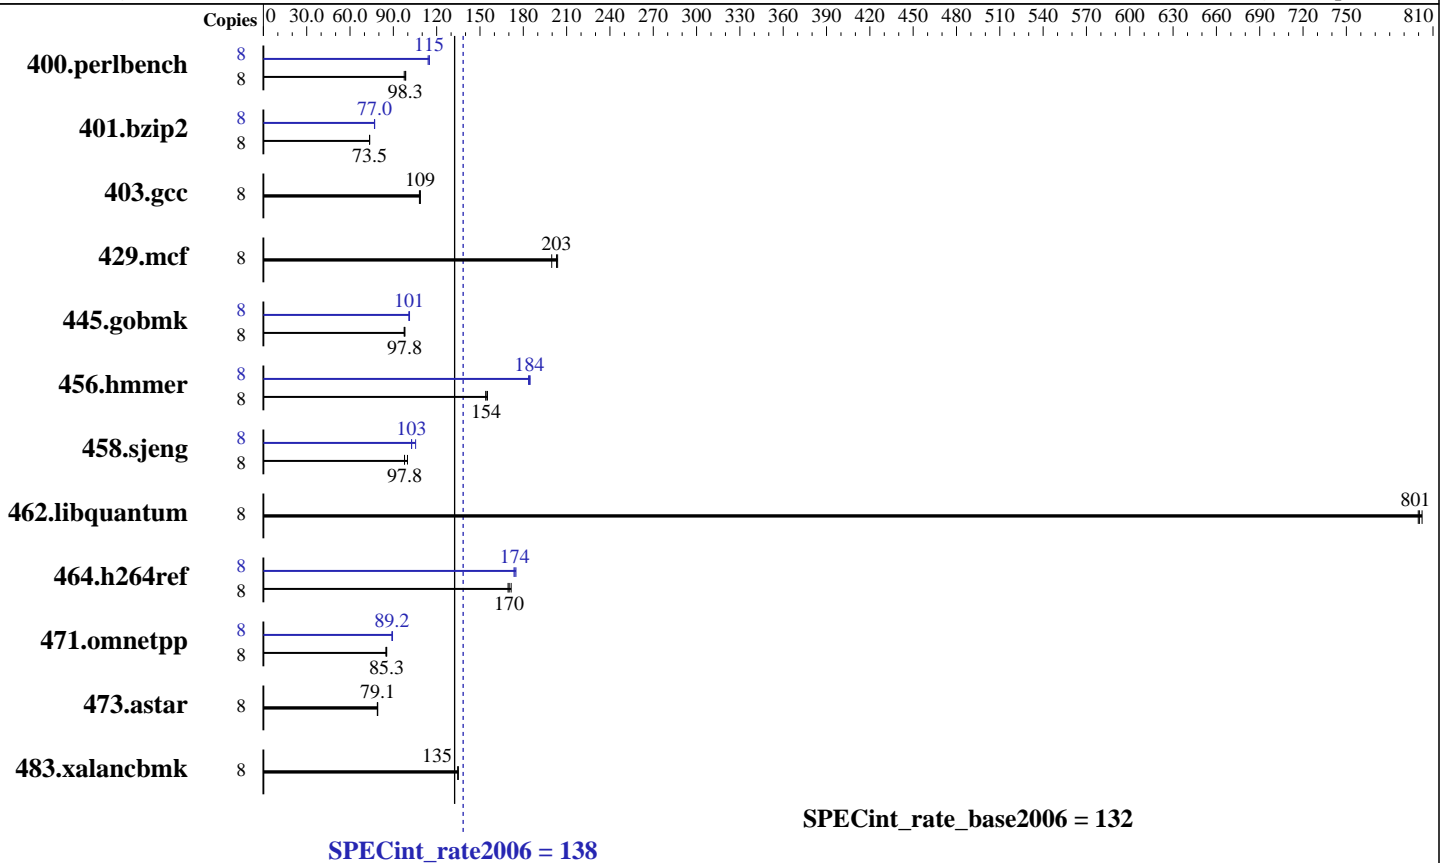

Hardware

CPU Name: Intel Xeon E3-1260L
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 16 GB
 (2 x 8 GB 2Rx8 PC3-10600E-9, ECC)
 Disk Subsystem: 1 x 750 GB SATA2, 5400 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.1, Kernel 2.6.32-131.0.15.el6.x86_64
 Compiler: C/C++; Version 12.1.0.225 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECint_rate2006 = 138

HA8000-bd (Intel Xeon E3-1260L)

SPECint_rate_base2006 = 132

CPU2006 license: 35
Test sponsor: HITACHI
Tested by: HITACHI

Test date: Dec-2011
Hardware Availability: Feb-2012
Software Availability: Sep-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	793	98.6	801	97.5	795	98.3	8	685	114	681	115	680	115
401.bzip2	8	1050	73.5	1050	73.5	1049	73.6	8	1004	76.9	1003	77.0	1001	77.1
403.gcc	8	593	109	596	108	593	109	8	593	109	596	108	593	109
429.mcf	8	365	200	359	203	358	204	8	365	200	359	203	358	204
445.gobmk	8	861	97.5	858	97.8	856	98.0	8	832	101	829	101	832	101
456.hammer	8	484	154	485	154	481	155	8	406	184	404	185	405	184
458.sjeng	8	990	97.8	970	99.8	990	97.7	8	943	103	943	103	918	105
462.libquantum	8	207	802	207	801	207	800	8	207	802	207	801	207	800
464.h264ref	8	1040	170	1032	172	1045	169	8	1020	174	1016	174	1012	175
471.omnetpp	8	589	84.8	586	85.4	586	85.3	8	561	89.2	559	89.4	561	89.1
473.astar	8	710	79.1	712	78.9	709	79.2	8	710	79.1	712	78.9	709	79.2
483.xalancbmk	8	409	135	409	135	410	135	8	409	135	409	135	410	135

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECint_rate2006 = 138

HA8000-bd (Intel Xeon E3-1260L)

SPECint_rate_base2006 = 132

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Dec-2011

Hardware Availability: Feb-2012

Software Availability: Sep-2011

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/smartheap -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECint_rate2006 = 138

HA8000-bd (Intel Xeon E3-1260L)

SPECint_rate_base2006 = 132

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Dec-2011

Hardware Availability: Feb-2012

Software Availability: Sep-2011

Peak Portability Flags (Continued)

462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32

401.bzp2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xAVX -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias
-opt-ra-region-strategy=block -Wl,-z,muldefs
-L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECint_rate2006 = 138

HA8000-bd (Intel Xeon E3-1260L)

SPECint_rate_base2006 = 132

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Dec-2011

Hardware Availability: Feb-2012

Software Availability: Sep-2011

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.2.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 03:26:48 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 6 February 2012.