



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge R415  
(AMD Opteron 4238, 3.30 GHz)

SPECfp<sup>®</sup>\_rate2006 = 190

SPECfp\_rate\_base2006 = 175

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Dec-2011

Hardware Availability: Jan-2012

Software Availability: Jul-2011

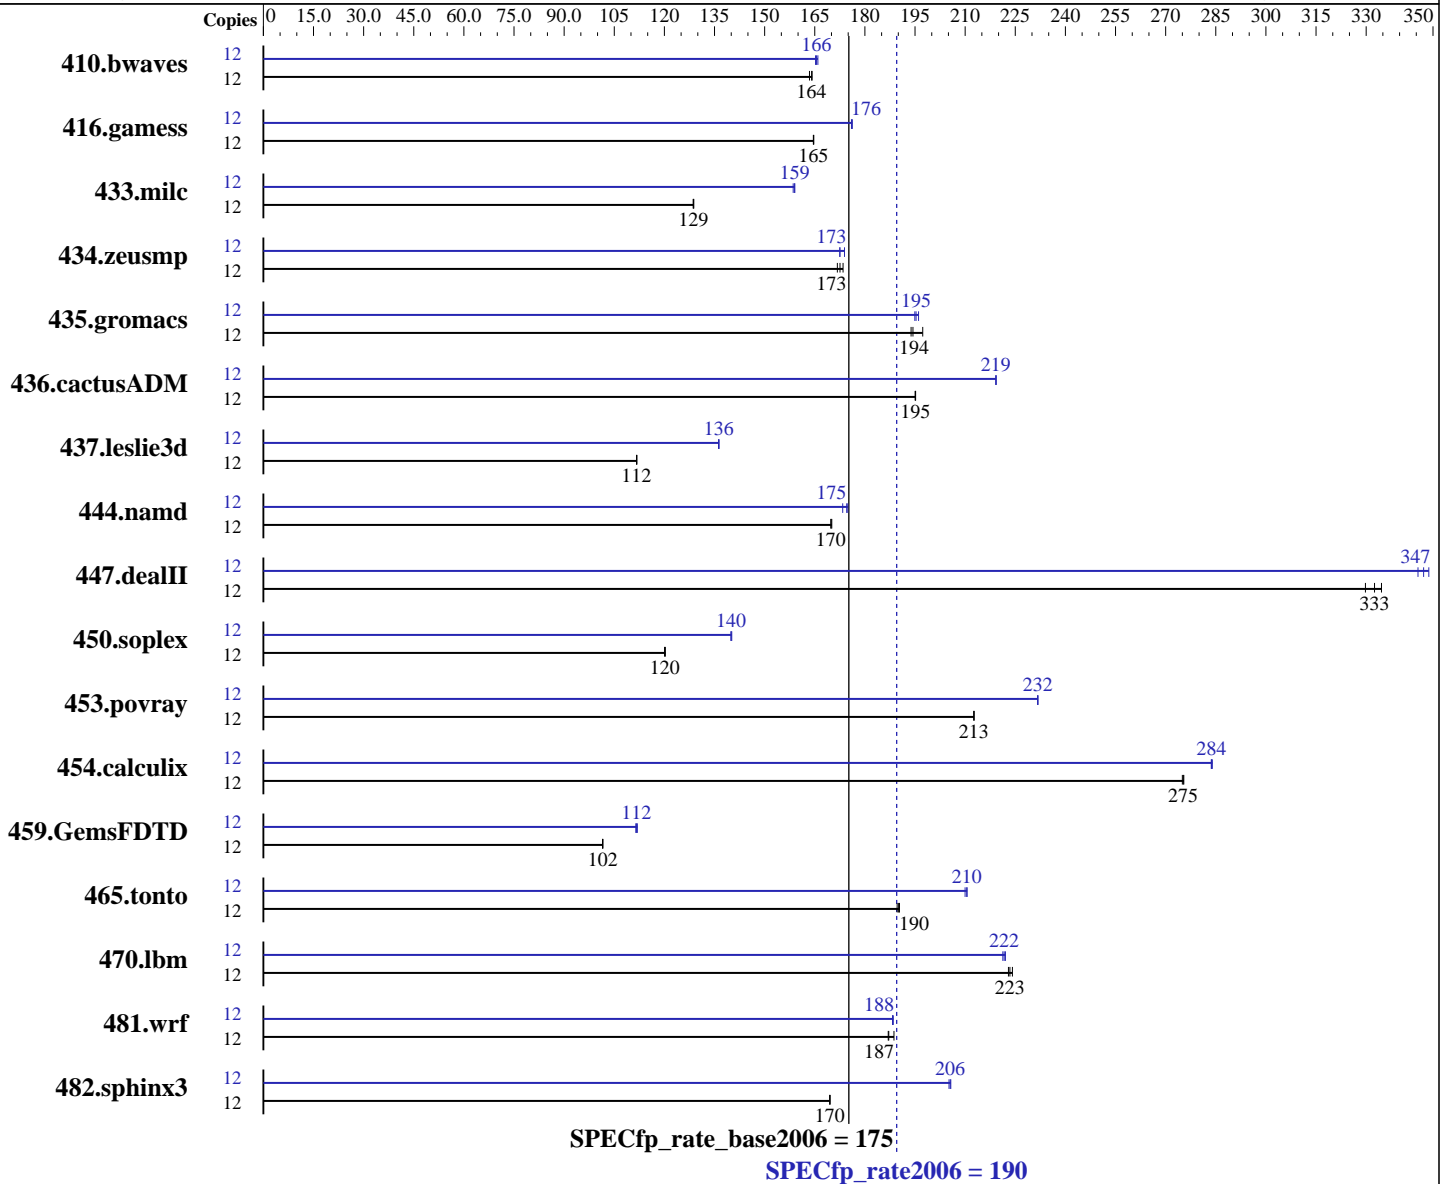

### Hardware

CPU Name: AMD Opteron 4238  
 CPU Characteristics: AMD Turbo CORE technology up to 3.70 GHz  
 CPU MHz: 3300  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip  
 CPU(s) orderable: 1,2 chips

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.1, Kernel 2.6.32-131.0.15.el6.x86\_64  
 Compiler: C/C++/Fortran: Version 4.2.5.2 of x86 Open64 Compiler Suite (from AMD)  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge R415  
(AMD Opteron 4238, 3.30 GHz)

SPECfp\_rate2006 = 190

SPECfp\_rate\_base2006 = 175

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Dec-2011

Hardware Availability: Jan-2012

Software Availability: Jul-2011

Primary Cache: 192 KB I on chip per chip,  
64 KB I shared / 2 cores;  
16 KB D on chip per core

Secondary Cache: 6 MB I+D on chip per chip, 2 MB shared / 2 cores

L3 Cache: 8 MB I+D on chip per chip

Other Cache: None

Memory: 32 GB (4 x 8 GB 2Rx4 PC3-12800R-11, ECC)

Disk Subsystem: 2 x 73 GB SAS, 15000 RPM

Other Hardware: None

Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	12	993	164	<u>994</u>	<u>164</u>	998	163	12	987	165	983	166	<u>985</u>	<u>166</u>		
416.gamess	12	1428	165	1427	165	<u>1427</u>	<u>165</u>	12	1335	176	<u>1334</u>	<u>176</u>	1333	176		
433.milc	12	855	129	<u>856</u>	<u>129</u>	856	129	12	693	159	<u>693</u>	<u>159</u>	695	159		
434.zeusmp	12	636	172	630	173	<u>633</u>	<u>173</u>	12	<u>633</u>	<u>173</u>	628	174	633	172		
435.gromacs	12	<u>441</u>	<u>194</u>	434	197	442	194	12	<u>439</u>	<u>195</u>	437	196	440	195		
436.cactusADM	12	735	195	<u>735</u>	<u>195</u>	735	195	12	<u>654</u>	<u>219</u>	654	219	654	219		
437.leslie3d	12	1009	112	<u>1010</u>	<u>112</u>	1010	112	12	<u>828</u>	<u>136</u>	827	136	828	136		
444.namd	12	<u>567</u>	<u>170</u>	566	170	567	170	12	<u>551</u>	<u>175</u>	550	175	555	173		
447.dealII	12	<u>413</u>	<u>333</u>	410	335	416	330	12	394	349	<u>395</u>	<u>347</u>	397	346		
450.soplex	12	<u>833</u>	<u>120</u>	834	120	832	120	12	715	140	<u>715</u>	<u>140</u>	714	140		
453.povray	12	<u>300</u>	<u>213</u>	300	213	300	213	12	<u>275</u>	<u>232</u>	276	232	275	232		
454.calculix	12	360	275	<u>360</u>	<u>275</u>	359	275	12	<u>349</u>	<u>284</u>	349	284	349	284		
459.GemsFDTD	12	1255	101	1253	102	<u>1254</u>	<u>102</u>	12	1142	111	<u>1140</u>	<u>112</u>	1138	112		
465.tonto	12	620	190	623	190	<u>621</u>	<u>190</u>	12	561	211	562	210	<u>561</u>	<u>210</u>		
470.lbm	12	736	224	<u>738</u>	<u>223</u>	740	223	12	743	222	<u>744</u>	<u>222</u>	745	221		
481.wrf	12	717	187	<u>716</u>	<u>187</u>	710	189	12	712	188	<u>712</u>	<u>188</u>	711	188		
482.sphinx3	12	1380	169	<u>1380</u>	<u>170</u>	1379	170	12	<u>1138</u>	<u>206</u>	1140	205	1137	206		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit  
Large pages were not enabled for this run  
Binaries were compiled on a system with 2x AMD Opteron 6276 chips + 128GB Memory using RHEL 6.1  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R415  
(AMD Opteron 4238, 3.30 GHz)

**SPECfp\_rate2006 = 190**

**SPECfp\_rate\_base2006 = 175**

**CPU2006 license:** 55  
**Test sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test date:** Dec-2011  
**Hardware Availability:** Jan-2012  
**Software Availability:** Jul-2011

## Operating System Notes (Continued)

Set kernel/randomize\_va\_space=0 in /etc/sysctl.conf

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/root/cpu2006-1.1/amd1104-rate-libs-revA/32:/root/cpu2006-1.1/amd1104-rate-libs-revA/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

## Base Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

Fortran benchmarks:  
openf95

Benchmarks using both Fortran and C:  
opencc openf95

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64  
436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LINUX -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LP64  
-fno-second-underscore  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R415  
(AMD Opteron 4238, 3.30 GHz)

**SPECfp\_rate2006 = 190**

**SPECfp\_rate\_base2006 = 175**

**CPU2006 license:** 55  
**Test sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test date:** Dec-2011  
**Hardware Availability:** Jan-2012  
**Software Availability:** Jul-2011

## Base Optimization Flags

### C benchmarks:

-march=bdver1 -Ofast -OPT:malloc\_alg=1 -HP:bd=2m:heap=2m  
-IPA:plimit=8000 -IPA:small\_pu=100 -mso

### C++ benchmarks:

-march=bdver1 -Ofast -static -CG:load\_exe=0 -OPT:malloc\_alg=1  
-INLINE:aggressive=on -HP:bd=2m:heap=2m -D\_\_OPEN64\_FAST\_SET

### Fortran benchmarks:

-march=bdver1 -Ofast -LNO:blocking=off -OPT:rsqrt=2  
-OPT:unroll\_size=256 -HP:bd=2m:heap=2m -mso

### Benchmarks using both Fortran and C:

-march=bdver1 -Ofast -OPT:malloc\_alg=1 -HP:bd=2m:heap=2m  
-IPA:plimit=8000 -IPA:small\_pu=100 -mso -LNO:blocking=off  
-OPT:rsqrt=2 -OPT:unroll\_size=256

## Peak Compiler Invocation

### C benchmarks:

opencc

### C++ benchmarks:

openCC

### Fortran benchmarks:

openf95

### Benchmarks using both Fortran and C:

opencc openf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64  
436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R415  
(AMD Opteron 4238, 3.30 GHz)

**SPECfp\_rate2006 = 190**

**SPECfp\_rate\_base2006 = 175**

**CPU2006 license:** 55  
**Test sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test date:** Dec-2011  
**Hardware Availability:** Jan-2012  
**Software Availability:** Jul-2011

## Peak Portability Flags (Continued)

470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LINUX -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LP64  
-fno-second-underscore  
482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: -march=bdver1 -Ofast -CG:movnti=1 -CG:locs\_best=on  
-HP:bdt=2m:heap=2m -IPA:plimit=7000 -IPA:callee\_limit=1200  
-OPT:struct\_array\_copy=2 -OPT:alias=field\_sensitive -mso  
  
470.lbm: -march=bdver1 -Ofast -CG:cmp\_peep=on  
-OPT:unroll\_times\_max=8 -OPT:unroll\_size=256  
-OPT:unroll\_level=2 -OPT:keep\_ext=on -HP:bdt=2m:heap=2m  
-IPA:plimit=8000 -IPA:small\_pu=100 -mso  
  
482.sphinx3: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -OPT:malloc\_alg=2  
-CG:cmp\_peep=on -CG:local\_sched\_alg=2 -INLINE:aggressive=on  
-LNO:prefetch=2 -LNO:prefetch\_ahead=4 -mso

C++ benchmarks:

444.namd: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -LNO:ignore\_feedback=off  
-CG:local\_sched\_alg=2 -CG:load\_exe=0 -OPT:unroll\_size=256  
-fno-exceptions -HP:bdt=2m:heap=2m  
  
447.deallI: -march=bdver1 -Ofast -D\_\_OPEN64\_FAST\_SET -static  
-INLINE:aggressive=on -LNO:opt=0 -LNO:simd=0  
-fno-emit-exceptions -m32 -OPT:unroll\_times\_max=8  
-OPT:unroll\_size=256 -OPT:unroll\_level=2 -HP:bdt=2m:heap=2m  
-GRA:unspill=on -CG:cmp\_peep=on -CG:movext\_icmp=off  
-TENV:frame\_pointer=off  
  
450.soplex: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -INLINE:aggressive=on -OPT:RO=1  
-OPT:IEEE\_arith=3 -OPT:IEEE\_NaN\_Inf=off  
-OPT:fold\_unsigned\_relops=on -fno-exceptions -m32  
-HP:bdt=2m:heap=2m -WOPT:sib=on  
  
453.povray: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -CG:pre\_local\_sched=off  
-INLINE:aggressive=on -HP:bdt=2m:heap=2m -OPT:transform=2  
-OPT:alias=disjoint -WOPT:aggcm=0

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R415  
(AMD Opteron 4238, 3.30 GHz)

**SPECfp\_rate2006 = 190**

**SPECfp\_rate\_base2006 = 175**

**CPU2006 license:** 55  
**Test sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test date:** Dec-2011  
**Hardware Availability:** Jan-2012  
**Software Availability:** Jul-2011

## Peak Optimization Flags (Continued)

Fortran benchmarks:

- 410.bwaves: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -OPT:Ofast -OPT:treeheight=on  
-LNO:blocking=off -LNO:ignore\_feedback=off -LNO:fu=4  
-LNO:loop\_model\_simd=on -LNO:simd\_rm\_unity\_remainder=on  
-WOPT:aggstr=0 -HP:bdt=2m:heap=2m -CG:cmp\_peep=on
- 416.gamess: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0  
-LNO:simd=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll\_size=256  
-OPT:unroll\_times\_max=2 -CG:local\_sched\_alg=1  
-HP:bdt=2m:heap=2m -WOPT:sib=on
- 434.zeusmp: -march=bdver1 -Ofast -LNO:blocking=off -LNO:interchange=off  
-HP:bdt=2m:heap=2m
- 437.leslie3d: -march=bdver1 -Ofast -CG:pre\_minreg\_level=2 -LNO:simd=0  
-LNO:fusion=2 -HP:bdt=2m:heap=2m -mso
- 459.GemsFDTD: -march=bdver1 -Ofast -OPT:unroll\_size=0 -LNO:fission=2  
-CG:load\_exe=0 -CG:local\_sched\_alg=2 -HP
- 465.tonto: -march=bdver1 -Ofast -OPT:alias=no\_f90\_pointer\_alias  
-LNO:blocking=off -CG:load\_exe=1 -IPA:plimit=525  
-HP:bdt=2m:heap=2m

Benchmarks using both Fortran and C:

- 435.gromacs: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -OPT:rsqrt=2  
-HP:bdt=2m:heap=2m
- 436.cactusADM: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -LNO:blocking=off  
-LNO:prefetch=2 -HP -CG:locs\_shallow\_depth=1 -CG:load\_exe=0  
-WOPT:sib=on
- 454.calculix: -march=bdver1 -Ofast -OPT:unroll\_size=256  
-GRA:optimize\_boundary=on -HP:bdt=2m:heap=2m
- 481.wrf: -march=bdver1 -Ofast -LNO:blocking=off -LANG:copyinout=off  
-IPA:callee\_limit=5000 -GRA:prioritize\_by\_density=on  
-CG:load\_exe=1 -HP -WOPT:sib=on

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revA.html>  
<http://www.spec.org/cpu2006/flags/amd1104-platform-rate-revA.html>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R415  
(AMD Opteron 4238, 3.30 GHz)

**SPECfp\_rate2006 = 190**

**SPECfp\_rate\_base2006 = 175**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Dec-2011

**Hardware Availability:** Jan-2012

**Software Availability:** Jul-2011

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revA.xml>

<http://www.spec.org/cpu2006/flags/amd1104-platform-rate-revA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Thu Jul 24 02:11:12 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 17 January 2012.