



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS TS700-E7(Z9PE-D16) Server System  
(Intel Xeon E5-2690)

SPECfp<sup>®</sup>2006 = 89.4

SPECfp\_base2006 = 84.7

CPU2006 license: 9016


Test sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test date: Feb-2012

Hardware Availability: Mar-2012

Software Availability: Dec-2011

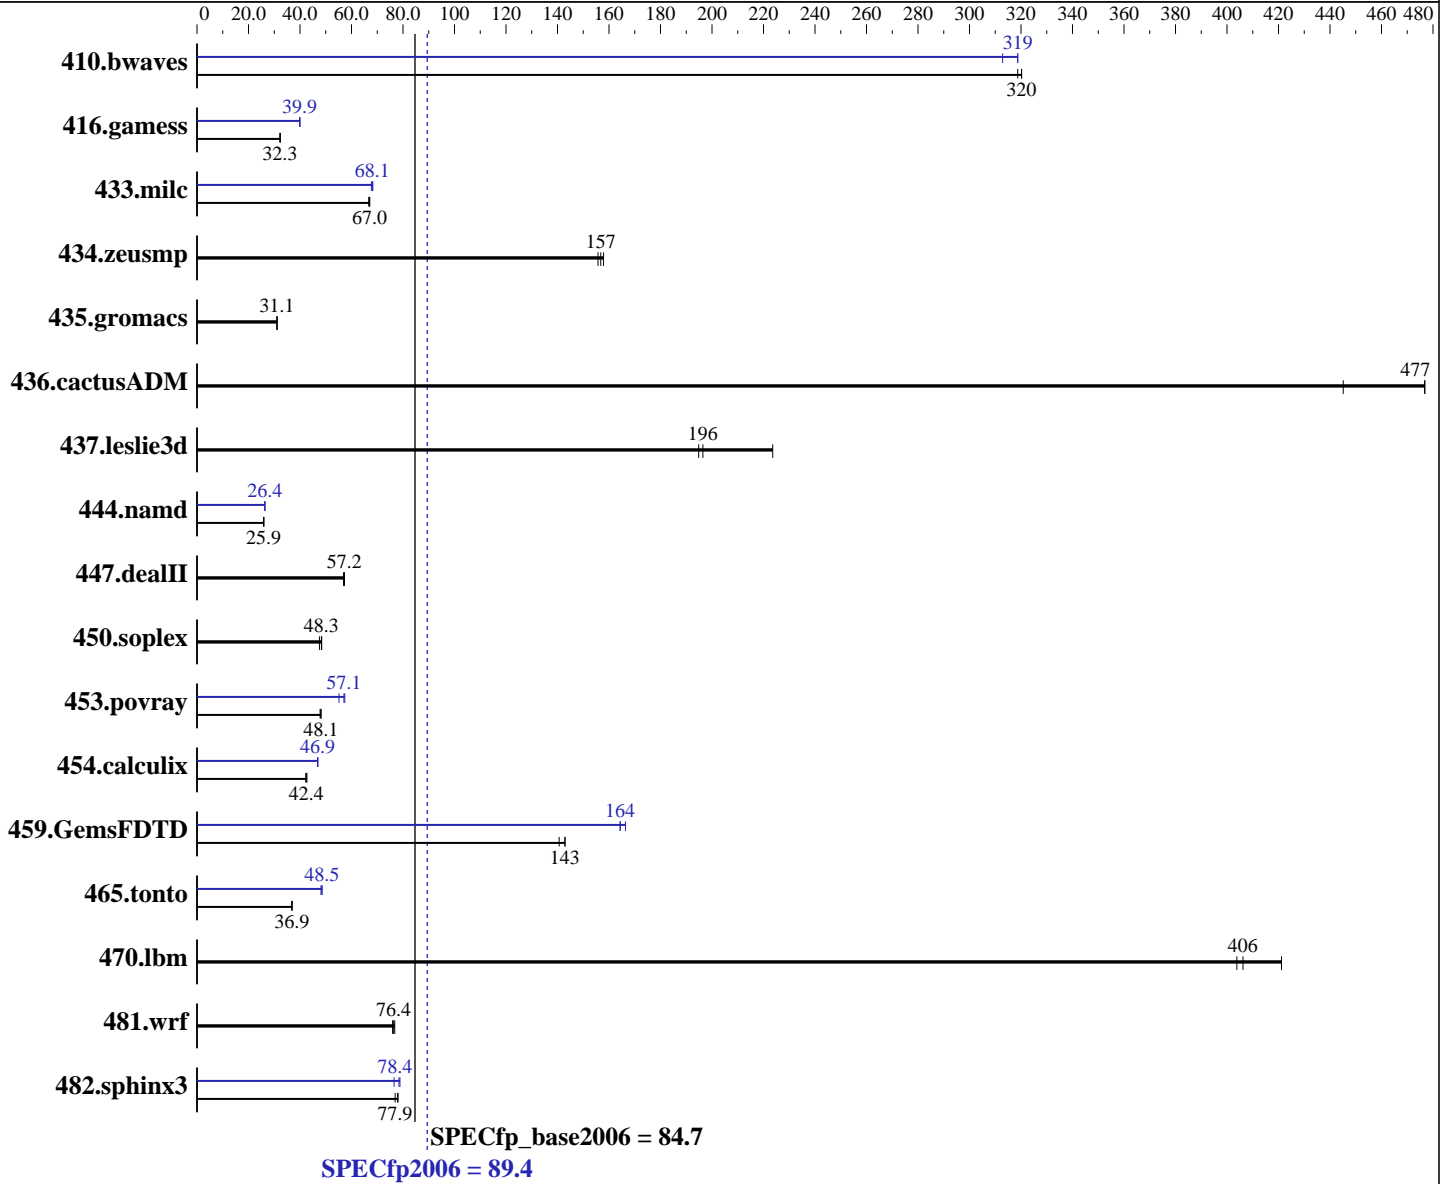

Hardware	
CPU Name:	Intel Xeon E5-2690
CPU Characteristics:	Intel Turbo Boost Technology up to 3.80 GHz
CPU MHz:	2900
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software	
Operating System:	Red Hat Enterprise Linux Server release 6.2 (Santiago)
	2.6.32-220.el6.x86_64
Compiler:	C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;
	Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
Auto Parallel:	Yes
File System:	ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

SPECfp2006 = **89.4**

ASUS TS700-E7(Z9PE-D16) Server System  
(Intel Xeon E5-2690)

SPECfp\_base2006 = **84.7**

CPU2006 license: 9016

Test date: Feb-2012

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2012

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2011

L3 Cache: 20 MB I+D on chip per chip  
Other Cache: None  
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
Disk Subsystem: Seagate ST3500320AS 1 x 500 GB SATA, 7200 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<b>42.4</b>	<b>320</b>	42.4	320	42.6	319	<b>42.6</b>	<b>319</b>	42.6	319	43.4	313
416.gamess	608	32.2	605	32.3	<b>606</b>	<b>32.3</b>	<b>491</b>	<b>39.9</b>	491	39.9	490	40.0
433.milc	138	66.7	<b>137</b>	<b>67.0</b>	137	67.1	134	68.3	<b>135</b>	<b>68.1</b>	136	67.7
434.zeusmp	58.4	156	57.6	158	<b>58.0</b>	<b>157</b>	58.4	156	57.6	158	<b>58.0</b>	<b>157</b>
435.gromacs	230	31.1	<b>230</b>	<b>31.1</b>	230	31.1	230	31.1	<b>230</b>	<b>31.1</b>	230	31.1
436.cactusADM	26.8	445	<b>25.1</b>	<b>477</b>	25.1	477	26.8	445	<b>25.1</b>	<b>477</b>	25.1	477
437.leslie3d	48.2	195	<b>47.8</b>	<b>196</b>	42.0	224	48.2	195	<b>47.8</b>	<b>196</b>	42.0	224
444.namd	<b>309</b>	<b>25.9</b>	310	25.9	309	25.9	<b>304</b>	<b>26.4</b>	304	26.4	304	26.3
447.dealII	200	57.2	<b>200</b>	<b>57.2</b>	201	56.9	200	57.2	<b>200</b>	<b>57.2</b>	201	56.9
450.soplex	<b>173</b>	<b>48.3</b>	175	47.6	172	48.4	<b>173</b>	<b>48.3</b>	175	47.6	172	48.4
453.povray	111	47.8	110	48.2	<b>111</b>	<b>48.1</b>	<b>93.2</b>	<b>57.1</b>	92.7	57.4	96.5	55.1
454.calculix	195	42.3	193	42.7	<b>194</b>	<b>42.4</b>	176	47.0	<b>176</b>	<b>46.9</b>	176	46.8
459.GemsFDTD	<b>74.3</b>	<b>143</b>	75.4	141	74.2	143	<b>64.6</b>	<b>164</b>	64.6	164	63.8	166
465.tonto	266	36.9	<b>267</b>	<b>36.9</b>	267	36.8	<b>203</b>	<b>48.5</b>	203	48.6	204	48.1
470.lbm	<b>33.8</b>	<b>406</b>	32.6	421	34.0	404	<b>33.8</b>	<b>406</b>	32.6	421	34.0	404
481.wrf	145	76.8	<b>146</b>	<b>76.4</b>	147	76.0	145	76.8	<b>146</b>	<b>76.4</b>	147	76.0
482.sphinx3	253	77.0	250	78.1	<b>250</b>	<b>77.9</b>	247	78.8	255	76.5	<b>248</b>	<b>78.4</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Sysinfo program /cpu2006/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on localhost Mon Feb 20 19:25:35 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-2690 @ 2.90GHz  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

**SPECfp2006 = 89.4**

ASUS TS700-E7(Z9PE-D16) Server System  
(Intel Xeon E5-2690)

**SPECfp\_base2006 = 84.7**

**CPU2006 license:** 9016

**Test date:** Feb-2012

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Mar-2012

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Dec-2011

## Platform Notes (Continued)

```

2 "physical id"s (chips)
32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 8
siblings : 16
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB

```

```

From /proc/meminfo
MemTotal:          132284976 kB
HugePages_Total:   0
Hugepagesize:      2048 kB

```

```

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)

```

```

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

```

uname -a:
Linux localhost 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Feb 20 19:17

```

SPEC is set to: /cpu2006
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sdal       ext4      459G  71G  366G  17% /

```

Additional information from dmidecode:

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

```

KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/cpu2006/libs/32:/cpu2006/libs/64"
OMP_NUM_THREADS = "16"

```

```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RHEL5.5
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

**SPECfp2006 = 89.4**

ASUS TS700-E7(Z9PE-D16) Server System  
(Intel Xeon E5-2690)

**SPECfp\_base2006 = 84.7**

**CPU2006 license:** 9016

**Test date:** Feb-2012

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Mar-2012

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Dec-2011

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.lelie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

**SPECfp2006 = 89.4**

ASUS TS700-E7(Z9PE-D16) Server System  
(Intel Xeon E5-2690)

**SPECfp\_base2006 = 84.7**

**CPU2006 license:** 9016

**Test date:** Feb-2012

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Mar-2012

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Dec-2011

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

**SPECfp2006 = 89.4**

ASUS TS700-E7(Z9PE-D16) Server System  
(Intel Xeon E5-2690)

**SPECfp\_base2006 = 84.7**

**CPU2006 license:** 9016

**Test date:** Feb-2012

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Mar-2012

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Dec-2011

## Peak Optimization Flags (Continued)

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/ASUSTekPlatform.20120313.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/ASUSTekPlatform.20120313.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 03:51:05 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 13 March 2012.