



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp[®]_rate2006 = 506

PowerEdge T620 (Intel Xeon E5-2690, 2.90 GHz)

SPECfp_rate_base2006 = 491

CPU2006 license: 55


Test date: Feb-2012

Test sponsor: Dell Inc.

Hardware Availability: Mar-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

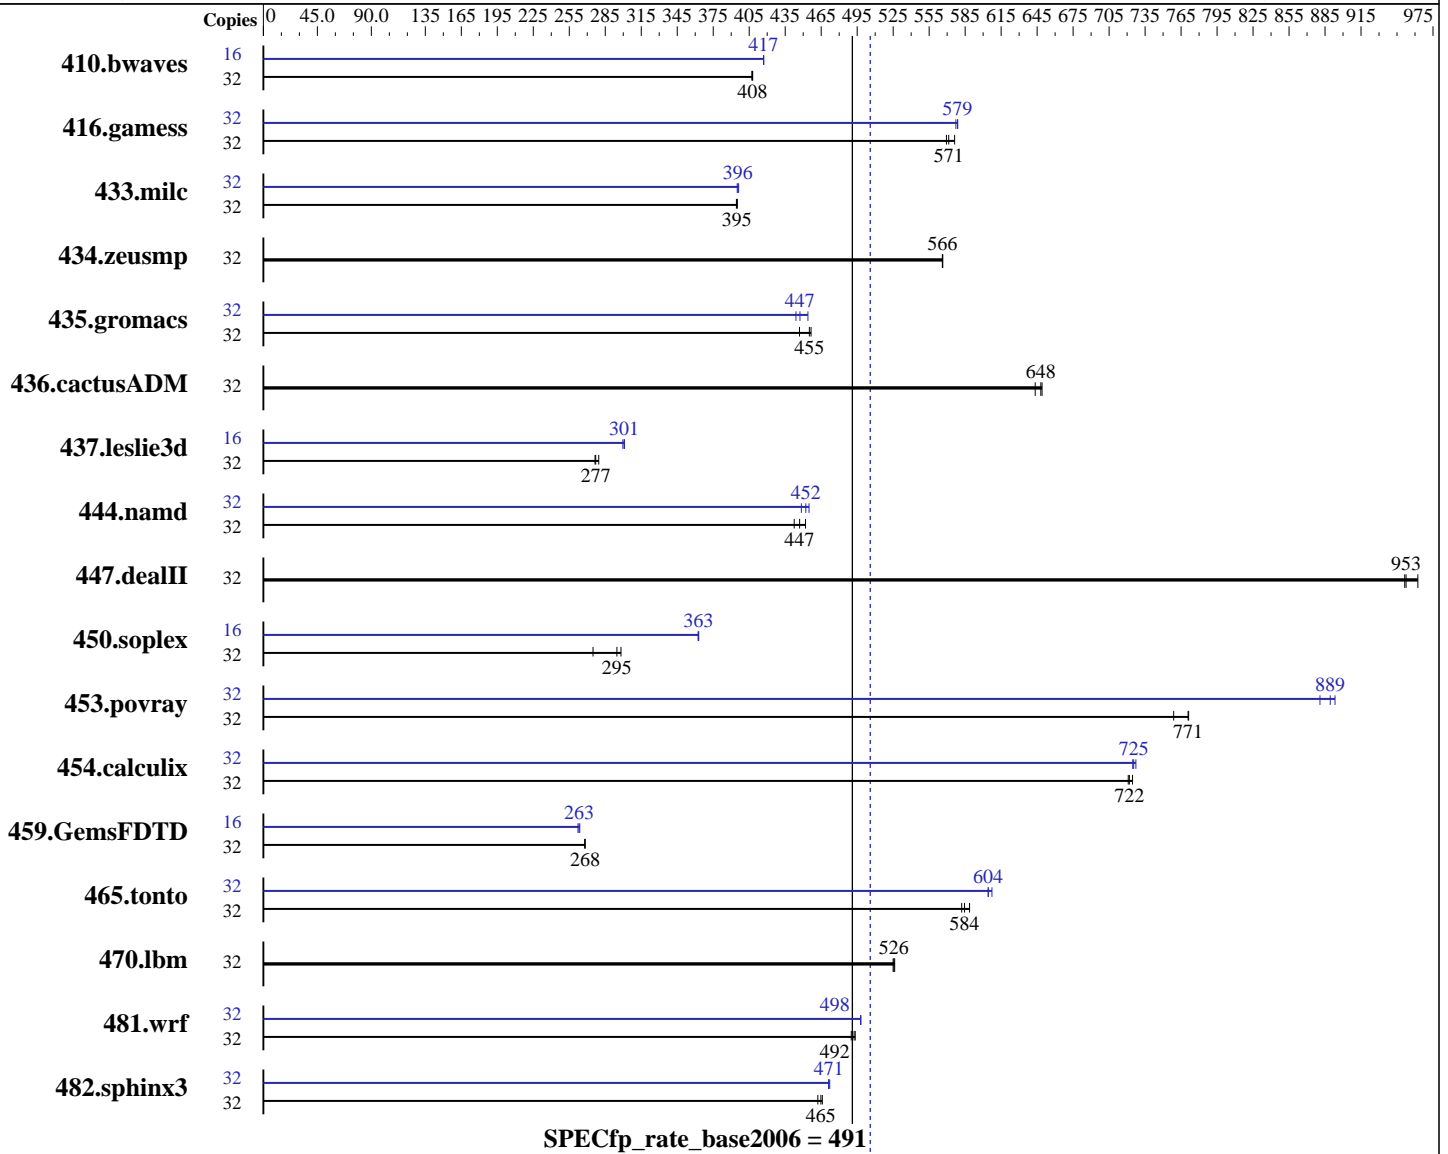

Hardware

CPU Name: Intel Xeon E5-2690
 CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz
 CPU MHz: 2900
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64) 3.0.13-0.9-default
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 506

PowerEdge T620 (Intel Xeon E5-2690, 2.90 GHz)

SPECfp_rate_base2006 = 491

CPU2006 license: 55

Test date: Feb-2012

Test sponsor: Dell Inc.

Hardware Availability: Mar-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

L3 Cache: 20 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem: 1 x 1 TB 7200 RPM SATA
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	1068	407	1066	408	1067	408	16	521	417	521	417	521	417
416.gamess	32	1100	569	1097	571	1087	576	32	1085	577	1083	579	1083	579
433.milc	32	744	395	744	395	745	394	32	741	396	743	396	744	395
434.zeusmp	32	514	566	514	566	514	566	32	514	566	514	566	514	566
435.gromacs	32	500	457	502	455	511	447	32	511	447	515	444	503	454
436.cactusADM	32	589	649	590	648	594	643	32	589	649	590	648	594	643
437.leslie3d	32	1088	276	1086	277	1076	280	16	500	301	502	300	500	301
444.namd	32	574	447	568	452	580	442	32	564	455	572	448	568	452
447.dealII	32	380	962	385	951	384	953	32	380	962	385	951	384	953
450.soplex	32	971	275	895	298	906	295	16	368	363	368	362	368	363
453.povray	32	221	771	221	771	224	759	32	191	893	191	889	193	881
454.calculix	32	366	722	364	725	366	721	32	364	725	363	727	364	725
459.GemsFDTD	32	1266	268	1266	268	1267	268	16	644	264	645	263	647	262
465.tonto	32	539	584	535	589	541	582	32	521	604	518	607	521	604
470.lbm	32	835	526	837	526	838	525	32	835	526	837	526	838	525
481.wrf	32	729	490	726	492	724	493	32	718	498	718	498	718	498
482.sphinx3	32	1349	462	1338	466	1342	465	32	1324	471	1321	472	1324	471

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

System Profile set to Performance in BIOS
Sysinfo program /root/CPU2006-1.2/config/sysinfo.rev6800
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 506

PowerEdge T620 (Intel Xeon E5-2690, 2.90 GHz)

SPECfp_rate_base2006 = 491

CPU2006 license: 55

Test date: Feb-2012

Test sponsor: Dell Inc.

Hardware Availability: Mar-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

Platform Notes (Continued)

running on linux-Sandy Sun Feb 5 11:06:30 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E5-2690 0 @ 2.90GHz
 2 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 8
  siblings  : 16
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
 cache size : 20480 KB
```

From /proc/meminfo

```
MemTotal: 132122692 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

/usr/bin/lsb_release -d

```
SUSE Linux Enterprise Server 11 (x86_64)
```

From /etc/*release* /etc/*version*

```
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 2
```

uname -a:

```
Linux linux-Sandy 3.0.13-0.9-default #1 SMP Mon Jan 16 17:33:03 UTC 2012
(54ddfaf) x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Feb 5 00:04 last=5

SPEC is set to: /root/CPU2006-1.2

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext3  197G   68G  120G  37% /
```

Additional information from dmidecode:

(End of data from sysinfo program)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 506

PowerEdge T620 (Intel Xeon E5-2690, 2.90 GHz)

SPECfp_rate_base2006 = 491

CPU2006 license: 55

Test date: Feb-2012

Test sponsor: Dell Inc.

Hardware Availability: Mar-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/root/CPU2006-1.2/libs/32:/root/CPU2006-1.2/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
The Dell PowerEdge T620 nd
the Bull NovaScale T840 F3 models are electronically equivalent.
The results have been measured on a Dell PowerEdge T620 model.

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.lelie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 506

PowerEdge T620 (Intel Xeon E5-2690, 2.90 GHz)

SPECfp_rate_base2006 = 491

CPU2006 license: 55

Test date: Feb-2012

Test sponsor: Dell Inc.

Hardware Availability: Mar-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

Base Portability Flags (Continued)

482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 5



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 506

PowerEdge T620 (Intel Xeon E5-2690, 2.90 GHz)

SPECfp_rate_base2006 = 491

CPU2006 license: 55

Test date: Feb-2012

Test sponsor: Dell Inc.

Hardware Availability: Mar-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

Peak Portability Flags (Continued)

```

435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-opt-mem-layout-trans=3

```

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

```

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

```

Fortran benchmarks:

```

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static

```

```

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

```

434.zeusmp: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 506

PowerEdge T620 (Intel Xeon E5-2690, 2.90 GHz)

SPECfp_rate_base2006 = 491

CPU2006 license: 55

Test date: Feb-2012

Test sponsor: Dell Inc.

Hardware Availability: Mar-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

Peak Optimization Flags (Continued)

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-static -auto-ilp32 -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120313.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120313.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 03:49:57 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 13 March 2012.