



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECfp®2006 = 83.6

NovaScale R440 F3 (Intel Xeon E5-2670, 2.60 GHz)

SPECfp\_base2006 = 79.3

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Feb-2012

Hardware Availability: Mar-2012

Software Availability: Feb-2012

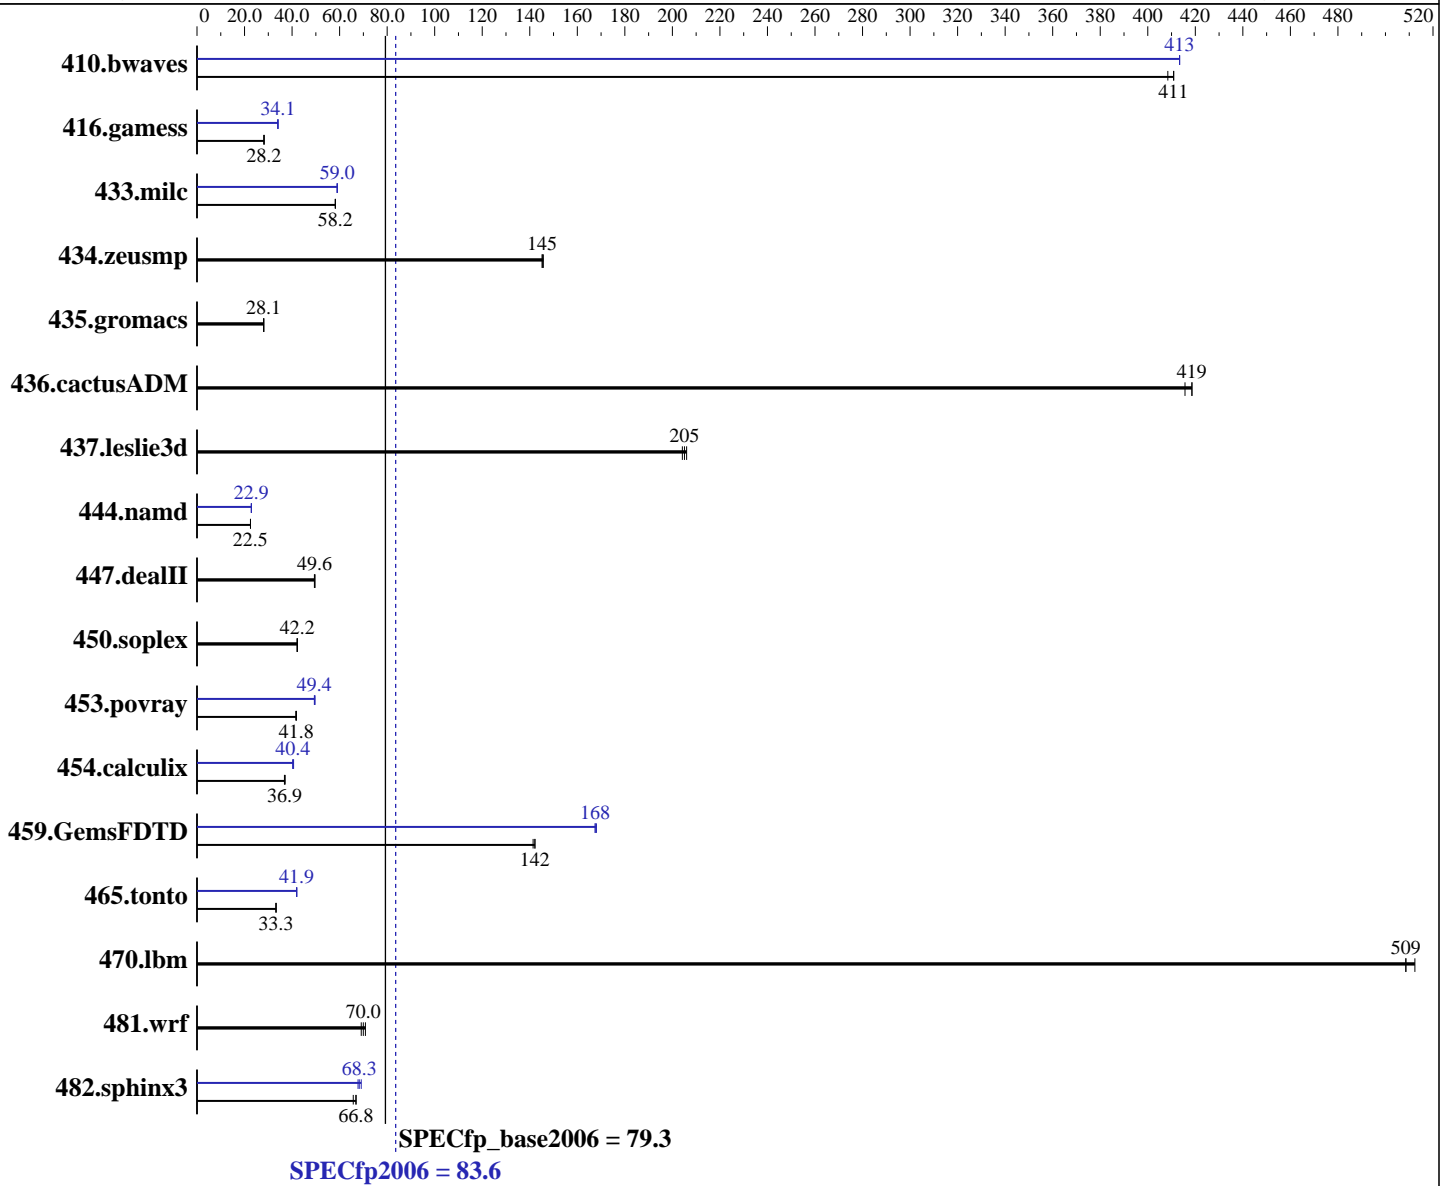

SPECfp2006 = 83.6

### Hardware

CPU Name: Intel Xeon E5-2670  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 SP2 (x86\_64) 3.0.13-0.9-default  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECfp2006 = **83.6**

NovaScale R440 F3 (Intel Xeon E5-2670, 2.60 GHz)

SPECfp\_base2006 = **79.3**

CPU2006 license: 20

Test date: Feb-2012

Test sponsor: Bull SAS

Hardware Availability: Mar-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 2 x 146 GB 15000 RPM SAS, RAID 0  
 Other Hardware: None

Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	33.3	408	<b><u>33.1</u></b>	<b><u>411</u></b>	33.1	411	32.9	413	32.9	413	<b><u>32.9</u></b>	<b><u>413</u></b>
416.gamess	693	28.3	<b><u>694</u></b>	<b><u>28.2</u></b>	696	28.1	577	34.0	<b><u>574</u></b>	<b><u>34.1</u></b>	574	34.1
433.milc	158	58.2	<b><u>158</u></b>	<b><u>58.2</u></b>	158	58.2	156	58.9	<b><u>156</u></b>	<b><u>59.0</u></b>	155	59.0
434.zeusmp	62.5	146	<b><u>62.7</u></b>	<b><u>145</u></b>	62.7	145	62.5	146	<b><u>62.7</u></b>	<b><u>145</u></b>	62.7	145
435.gromacs	255	28.1	<b><u>254</u></b>	<b><u>28.1</u></b>	254	28.1	255	28.1	<b><u>254</u></b>	<b><u>28.1</u></b>	254	28.1
436.cactusADM	28.7	416	28.5	419	<b><u>28.5</u></b>	<b><u>419</u></b>	28.7	416	28.5	419	<b><u>28.5</u></b>	<b><u>419</u></b>
437.leslie3d	<b><u>45.8</u></b>	<b><u>205</u></b>	46.0	204	45.6	206	<b><u>45.8</u></b>	<b><u>205</u></b>	46.0	204	45.6	206
444.namd	<b><u>356</u></b>	<b><u>22.5</u></b>	356	22.5	356	22.5	350	22.9	<b><u>350</u></b>	<b><u>22.9</u></b>	351	22.9
447.dealII	<b><u>231</u></b>	<b><u>49.6</u></b>	232	49.4	231	49.6	<b><u>231</u></b>	<b><u>49.6</u></b>	232	49.4	231	49.6
450.soplex	197	42.3	198	42.1	<b><u>198</u></b>	<b><u>42.2</u></b>	197	42.3	198	42.1	<b><u>198</u></b>	<b><u>42.2</u></b>
453.povray	<b><u>127</u></b>	<b><u>41.8</u></b>	127	41.8	128	41.6	<b><u>108</u></b>	<b><u>49.4</u></b>	108	49.4	107	49.7
454.calculix	224	36.8	<b><u>223</u></b>	<b><u>36.9</u></b>	223	37.0	205	40.3	<b><u>204</u></b>	<b><u>40.4</u></b>	203	40.6
459.GemsFDTD	74.6	142	75.0	141	<b><u>74.6</u></b>	<b><u>142</u></b>	<b><u>63.3</u></b>	<b><u>168</u></b>	63.3	168	63.1	168
465.tonto	296	33.2	<b><u>296</u></b>	<b><u>33.3</u></b>	296	33.3	235	41.9	234	42.0	<b><u>235</u></b>	<b><u>41.9</u></b>
470.lbm	<b><u>27.0</u></b>	<b><u>509</u></b>	27.0	509	26.8	512	<b><u>27.0</u></b>	<b><u>509</u></b>	27.0	509	26.8	512
481.wrf	162	69.1	<b><u>160</u></b>	<b><u>70.0</u></b>	158	70.9	162	69.1	<b><u>160</u></b>	<b><u>70.0</u></b>	158	70.9
482.sphinx3	296	65.7	<b><u>292</u></b>	<b><u>66.8</u></b>	291	67.0	<b><u>285</u></b>	<b><u>68.3</u></b>	288	67.7	282	69.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

System Profile set to Custom  
 CPU Power Management set to Maximum Performance  
 Memory Frequency set to Maximum Performance  
 Turbo Boost set to Enabled  
 C States/C1E set to Enabled  
 Sysinfo program /root/CPU2006-1.2/config/sysinfo.rev6800  
 \$Rev: 6800 \$ \$Date:: 2011-10-11 # \$ 6f2ebdff5032aaa42e583f96b07f99d3  
 running on unsvr Mon Feb 13 20:20:17 2012

This section contains SUT (System Under Test) info as seen by  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

**SPECfp2006 = 83.6**

NovaScale R440 F3 (Intel Xeon E5-2670, 2.60 GHz)

**SPECfp\_base2006 = 79.3**

**CPU2006 license:** 20

**Test sponsor:** Bull SAS

**Tested by:** Dell Inc.

**Test date:** Feb-2012

**Hardware Availability:** Mar-2012

**Software Availability:** Feb-2012

### Platform Notes (Continued)

some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
  model name : Intel(R) Xeon(R) CPU E5-2670 0 @ 2.60GHz
  2 "physical id"s (chips)
  32 "processors"
  cores, siblings (Caution: counting these is hw and system dependent. The
  following excerpts from /proc/cpuinfo might not be reliable. Use with
  caution.)
    cpu cores : 8
    siblings  : 16
    physical 0: cores 0 1 2 3 4 5 6 7
    physical 1: cores 0 1 2 3 4 5 6 7
  cache size : 20480 KB

```

```

From /proc/meminfo
MemTotal:      132089856 kB
HugePages_Total:    0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)

```

```

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 2

```

```

uname -a:
Linux unsvr 3.0.13-0.9-default #1 SMP Mon Jan 16 17:33:03 UTC 2012 (54ddfaf)
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Feb 13 14:09 last=S

```

SPEC is set to: /root/CPU2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal       ext3  265G   68G  183G  27% /

```

Additional information from dmidecode:

(End of data from sysinfo program)

### General Notes

Environment variables set by runspec before the start of the run:

```

KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/root/CPU2006-1.2/libs/32:/root/CPU2006-1.2/libs/64"
OMP_NUM_THREADS = "16"
The Dell PowerEdge R620 and

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECfp2006 = 83.6

NovaScale R440 F3 (Intel Xeon E5-2670, 2.60 GHz)

SPECfp\_base2006 = 79.3

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Dell Inc.

Test date: Feb-2012  
Hardware Availability: Mar-2012  
Software Availability: Feb-2012

### General Notes (Continued)

the Bull NovaScale R440 F3 models are electronically equivalent.  
The results have been measured on a Dell PowerEdge R620 model  
Transparent Huge Pages disabled with:  
echo never > /sys/kernel/mm/transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

### Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

### Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.lelie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

### Base Optimization Flags

C benchmarks:  
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Bull SAS**

**SPECfp2006 = 83.6**

NovaScale R440 F3 (Intel Xeon E5-2670, 2.60 GHz)

**SPECfp\_base2006 = 79.3**

**CPU2006 license:** 20

**Test sponsor:** Bull SAS

**Tested by:** Dell Inc.

**Test date:** Feb-2012

**Hardware Availability:** Mar-2012

**Software Availability:** Feb-2012

## Base Optimization Flags (Continued)

C++ benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias`

Fortran benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Benchmarks using both Fortran and C:

`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias`

## Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias`

470.lbm: `basepeak = yes`

482.sphinx3: `-xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel`

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Bull SAS**

**SPECfp2006 = 83.6**

NovaScale R440 F3 (Intel Xeon E5-2670, 2.60 GHz)

**SPECfp\_base2006 = 79.3**

**CPU2006 license:** 20

**Test date:** Feb-2012

**Test sponsor:** Bull SAS

**Hardware Availability:** Mar-2012

**Tested by:** Dell Inc.

**Software Availability:** Feb-2012

## Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120328.html>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

**SPECfp2006 = 83.6**

NovaScale R440 F3 (Intel Xeon E5-2670, 2.60 GHz)

**SPECfp\_base2006 = 79.3**

**CPU2006 license:** 20

**Test sponsor:** Bull SAS

**Tested by:** Dell Inc.

**Test date:** Feb-2012

**Hardware Availability:** Mar-2012

**Software Availability:** Feb-2012

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120328.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 03:10:10 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 27 March 2012.