



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®_rate2006 = 460

PowerEdge T620 (Intel Xeon E5-2650L, 1.80 GHz)

SPECint_rate_base2006 = 440

CPU2006 license: 55


Test date: Feb-2012

Test sponsor: Dell Inc.

Hardware Availability: Mar-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

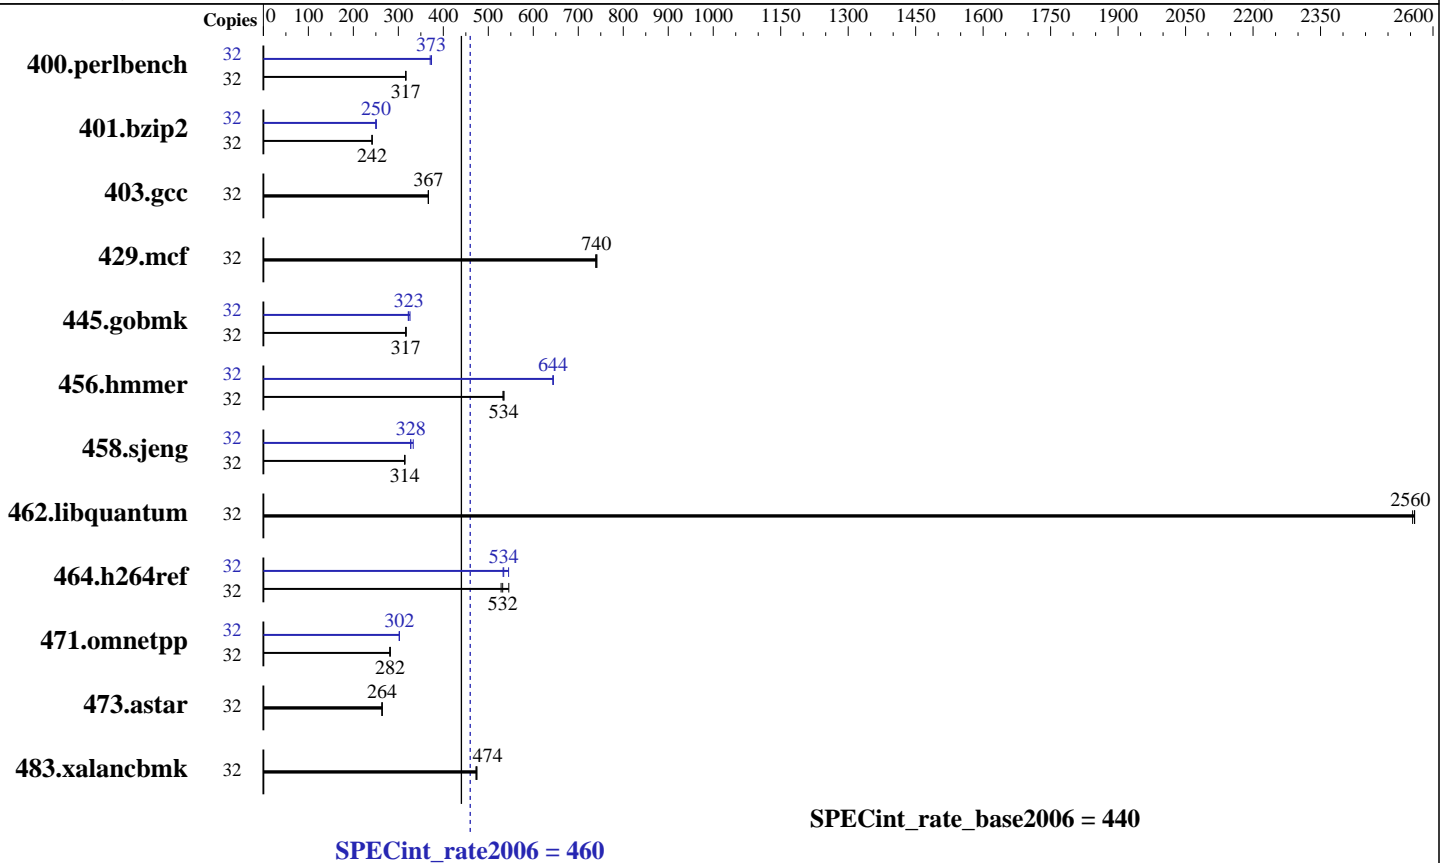

Hardware

CPU Name: Intel Xeon E5-2650L
 CPU Characteristics: Intel Turbo Boost Technology up to 2.30 GHz
 CPU MHz: 1800
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)
 Disk Subsystem: 1 x 250 GB 7200 RPM SATA
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 SP2 (x86_64) 3.0.13-0.9-default
 Compiler: C/C++; Version 12.1.0.225 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 460

PowerEdge T620 (Intel Xeon E5-2650L, 1.80 GHz)

SPECint_rate_base2006 = 440

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Feb-2012
Hardware Availability: Mar-2012
Software Availability: Feb-2012

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	988	317	987	317	988	316	32	843	371	838	373	837	374
401.bzip2	32	1277	242	1277	242	1279	241	32	1235	250	1233	250	1230	251
403.gcc	32	703	367	702	367	702	367	32	703	367	702	367	702	367
429.mcf	32	394	740	395	739	394	742	32	394	740	395	739	394	742
445.gobmk	32	1058	317	1061	316	1059	317	32	1030	326	1039	323	1042	322
456.hammer	32	558	535	559	534	561	532	32	463	644	463	644	464	644
458.sjeng	32	1232	314	1233	314	1231	315	32	1162	333	1182	328	1182	328
462.libquantum	32	260	2550	259	2560	259	2560	32	260	2550	259	2560	259	2560
464.h264ref	32	1298	546	1331	532	1340	528	32	1299	545	1329	533	1325	534
471.omnetpp	32	709	282	712	281	710	282	32	662	302	662	302	661	302
473.astar	32	850	264	852	264	852	264	32	850	264	852	264	852	264
483.xalancbmk	32	467	473	466	474	465	475	32	467	473	466	474	465	475

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

System Profile set to Custom
CPU Power Management set to Maximum Performance
Memory Frequency set to Maximum Performance
Turbo Boost set to Enabled
C States/C1E set to Enabled
Sysinfo program /root/CPU2006-1.2/config/sysinfo.rev6800
\$Rev: 6800 \$ \$Date:: 2011-10-11 # \$ 6f2ebdff5032aaa42e583f96b07f99d3
running on SUT Fri Feb 10 00:34:30 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2650L 0 @ 1.80GHz
2 "physical id"s (chips)
32 "processors"

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 460

PowerEdge T620 (Intel Xeon E5-2650L, 1.80 GHz)

SPECint_rate_base2006 = 440

CPU2006 license: 55

Test date: Feb-2012

Test sponsor: Dell Inc.

Hardware Availability: Mar-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 8
siblings  : 16
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

From /proc/meminfo

```
MemTotal:      132122692 kB
HugePages_Total: 0
Hugepagesize:   2048 kB
```

/usr/bin/lsb_release -d

```
SUSE Linux Enterprise Server 11 (x86_64)
```

From /etc/*release* /etc/*version*

```
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 2
```

uname -a:

```
Linux SUT 3.0.13-0.9-default #1 SMP Mon Jan 16 17:33:03 UTC 2012 (54ddfaf)
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Feb 10 00:33 last=S

SPEC is set to: /root/CPU2006-1.2

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal        ext3  226G   68G  147G  32% /
```

Additional information from dmidecode:

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/root/CPU2006-1.2/libs/32:/root/CPU2006-1.2/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5
The Dell PowerEdge T620 and
the Bull NovaScale T840 F3 models are electronically equivalent.

The results have been measured on a Dell PowerEdge T620 model

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 460

PowerEdge T620 (Intel Xeon E5-2650L, 1.80 GHz)

SPECint_rate_base2006 = 440

CPU2006 license: 55

Test date: Feb-2012

Test sponsor: Dell Inc.

Hardware Availability: Mar-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/smartheap -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 460

PowerEdge T620 (Intel Xeon E5-2650L, 1.80 GHz)

SPECint_rate_base2006 = 440

CPU2006 license: 55

Test date: Feb-2012

Test sponsor: Dell Inc.

Hardware Availability: Mar-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LINUX
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
 -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
 -L/smartheap -lsmartheap

473.astar: basepeak = yes

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 460

PowerEdge T620 (Intel Xeon E5-2650L, 1.80 GHz)

SPECint_rate_base2006 = 440

CPU2006 license: 55

Test date: Feb-2012

Test sponsor: Dell Inc.

Hardware Availability: Mar-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

Peak Optimization Flags (Continued)

483.xalanbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120328.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120328.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 03:01:41 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 27 March 2012.